IBW Phase 2 Cost Reduction Study 2025 - Appendix 1: Space Program Summary

PPS ED SPEC 2017SUMMARY						2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.								
AREA	Quant.	SF Room	SF Room	Quant.	Total	Quant.	SF Room	Total	Quant.	SF Room	Total
COMPREHENSIVE HIGH SCHOOL PROGRAM - TEACHING STATIONS											
General Education (Gen-Ed) Classrooms	41				53,180	42		42,760	37		36,850
Science Labs	11				17,480	12		17,480	11		17,680
Fine & Performing Arts (Drama, Theater)	4				21,150	8		26,897	5		24,740
Career Preparation/CTE	3				6,000	14		26,960	11		20,100
Athletics (incudes area for P.E. instruction)	3				35,580	5		40,156	4		38,510
Education Support	2				67,400	10		67,445	9		62,728
Sub-Total Recommended Teaching Stations	*64*				***200,790***	**91**		**221,698**	**77**		**200,608**
Community Partners					1,200			1,200			690
Wrap-Around Service Providers					4,700			5,935			2,045
Sub-Total Community Partners and Wrap Around Services					***5,900***			**7,135**			**2,735**
SUB-TOTAL COMPREHENSIVE HIGH SCHOOL REQUIRED NET AREA					*206,690*			*228,833*			*203,343*
Net to Gross Multiplier					*74,408*			82,380			91,504
TOTAL COMPREHENSIVE HIGH SCHOOL REQUIRED					***281,098***			***311,213***			***294,847***

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan				Phase 2 Cost Study		
	Rec.		Pref/Opp.										
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total		Quant.	SF Room	Total
CORE PROGRAM													
Career Preparation | CTE													
Classrooms	TBD per site				4,800								
Specialized classrooms/labs													
CTE Manufacturing Shop							***1***	3,500	3,500		***0***	3,500	0
CTE Wood Shop							***1***	4,000	4,000		***1***	3,500	3,500
CTE Industrial Arts Classroom							1	1,100	1,100		0	950	0
CTE Engineering							***1***	1,500	1,500		***1***	1,350	1,350
CTE Sound Engineering							***1***	2,000	2,000		***1***	1,650	1,650
CTE Sound Engineering Studio Space									0		1	400	400
CTE Computer Science Classroom - regular							***2***	1,100	2,200		***1***	950	950
CTE Computer Science Classroom - large									0		***1***	1,350	1,350
CTE Robotics Storage							***1***	1,500	1,500		1	300	300
CTE Journalism							***1***	1,100	1,100		***1***	950	950
CTE Business							***1***	980	980		***1***	950	950
CTE SHARED Audio/Video Recording Suite							1	500	500		1	750	750
CTE Computer Lab: accounting/finance/intro to biz							***1***	1,100	1,100		***1***	950	950
CTE Costuming Storage									0		***1***	400	400
CTE Health Occupations Classroom							***1***	2,000	2,000		***1***	950	950
CTE Health Occupations Lab									0		1	950	950
CTE Photography [Digital and Analog]							***1***	1,380	1,380		***1***	1,200	1,200
CTE Photography lighting studio									0		1	300	300
CTE Printmaking Classroom							***1***	1,900	1,900		***1***	1,500	1,500
CTE Photography and Screen-printing darkroom and washout									0		1	500	500
Maker Space	1	1,200			1,200		1	1,200	1,200		1	1,200	1,200
Sub-Total Career Prep | CTE					***6,000***		**14**		**26,960**		***11***		**20,100**

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
General Education Classrooms - Core Program Recommendations												
English	***11***	980			10,780		***10***	980	9,800	***11***	950	10,450
Math	***8***	980			7,840		***7***	980	6,860	***8***	950	7,600
Social Studies	***8***	980			7,840		***7***	980	6,860	***8***	950	7,600
Health	***2***	980			1,960		***2***	980	1,960	***2***	950	1,900
World Language	***6***	980			5,880		***5***	980	4,900	***6***	950	5,700
Electives	***6***	980			5,880		***1***	980	980	***0***	950	0
Sub-Total Gen Ed Classrooms	***41***				***40,180***		**32**		**31,360**	***35***		**33,250**
Specialized Classrooms - Core Program Recommendations												
Science Lab	***11***	1,500			16,500		***11***	1,500	16,500	***11***	1,500	16,500
Chemical Storage	1	180			180		1	180	180	1	180	180
Prep Rooms	4	200			800		4	200	800	5	200	1,000
Sub-Total Specialized Classrooms	***11***				***17,480***		**12**		**17,480**	**11**		**17,680**
Smaller Instructional Spaces			500	10			***10***	500	5,000	***2***	500	1,000
Flexible Learning Areas			1,000	8			8	800	6,400	4	650	2,600
Sub-Total Optional			13,000						11,400			3,600
Sub-Total Recommended Classrooms					***63,660***				**75,800**			**71,030**
SUB-TOTAL REC: CORE PROG+ FLEXIBLE LEARNING + SMALLER INSTR.					***76,660***				***87,200***			***74,630***
FINE & PERFORMING ARTS												
Fine & Visual Arts												
Art Room (2D)	***1***	1,200	1,700	1	1,200		***1***	1,200	1,200	***1***	1,200	1,200
Art Room (3D)	***1***	1,500	1,700	1	1,500		***1***	1,500	1,500	***1***	1,500	1,500
Kiln Room	***1***	100			100		1	200	200	1	200	200
Supply /Storage	***1***	160			160		2	160	320	2	160	320
Art Office(s)	1	120			120		1	120	120	0	120	0
Sub-Total Fine & Visual Arts					***3,080***		**4**		**3,340**	***2***		**3,220**

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
Band / Orchestra												
Band Room	***1***	2,200	2,400	1	2,200		***1***	2,800	2,800	***1***	2,400	2,400
Large Instrument Storage Room	1	250			250		1	250	250	1	250	250
Music Library & Uniform Storage	1	200			200		1	200	200	1	200	200
Small Equipment Storage	1	200			200		1	200	200	1	200	200
Large Practice Rooms/Music Lab	1	300	300	2	300		1	300	300	1	300	300
Small Practice Rooms	2	100	100	3	200		2	100	200	2	100	200
Band Office	1	120			120		1	120	120	1	120	120
Sub-Total Band/Orchestra					***3,470***		**1**		**4,070**	***1***		**3,670**
Choir												
Choir Room			1,500	1			***1***	1,500	1,500	***1***	1,500	1,500
Choir Office / Music Library / Practice Room							1	100	100	1	200	200
Choir practice room									0	1	100	100
Equipment & Robe Storage / Practice Room			200	1	0		***0***	200	0	1	200	200
Sub-Total Choir					***0***		**1**		**1,600**	***1***		**2,000**
Sub-Total Preferred			6,700									
Sub-Total Optional			1,700									
SUB-TOTAL RECOMMENDED FINE & PERFORMING ARTS Fine & Visual Arts					***6,550***		**6**		**9,010**	**4**		**8,890**
Theater & Dance												
Theater (500 seat)	1	5,000	6,000	1	5,000		1	8,057	8,057	1	6,000	6,000
Sound Booth	1	100			100		1	100	100	1	100	100
Follow Spot					0		1	200	200	1	140	140
Orchestra Pit	1	500			500		1	500	500	1	500	500
Control Room	1	200			200		1	200	200	1	200	200
Stage	1	3,500			3,500		1	3,500	3,500	1	3,500	3,500
Piano Storage					0				0	1	80	80
Lighting Storage	1	100			100		1	100	100	1	100	100
Equipment Storage	1	120			120		1	120	120	1	120	120
Drama Classroom/Black Box	***1***	1,600	2,600	1	1,600		***1***	1,600	1,600	***1***	1,600	1,600
Multi-Purpose Production Area			1,500	1			0	1,500	0	0	1,500	0
Laundry	1	150			150		1	150	150	1	150	150
Office	1	70			70		1	100	100	1	100	100
Box Office/Tickets	1	100			100		1	100	100	1	100	100

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
Concession Stand	1	100	200	1	100		1	100	100	1	100	100
Scene Shop	1	1,500			1,500		1	1,500	1,500	1	1,500	1,500
Costume Storage	1	400			400		1	400	400	1	400	400
Make-up Room	1	400			400		1	400	400	1	400	400
Boy's Dressing	1	250			250		1	250	250	0	250	0
Girl's Dressing	1	250			250		1	250	250	0	250	0
Dressing					0				0	1	500	500
Girl's Toilet	1	130			130		1	130	130	0	130	0
Boy's Toilet	1	130			130		1	130	130	0	130	0
Toilets										1	260	260
Green Room			400	1								
Sub-Total Preferred			**8,800**									
Sub-Total Optional			1,900									
SUB-TOTAL RECOMMENDED FINE & PERFORMING ARTS Theater/Dance					***14,600***		**2**		***17,887***	**1**		***15,850***
PHYSICAL EDUCATION/ATHLETICS												
Gym (large; two teaching stations)	**1**	13,000	14,676	1	13,000		***2***	14,676	14,676	***1***	15,080	15,080
Mat/Wrestling/Dance	1	2,750	3,500	1	2,750		***1***	3,500	3,500	***1***	2,750	2,750
Mat Room Storage							1	500	500	1	300	300
Weight Room/Aerobics/Spinning	**1**	2,500	3,000	1	2,500		***1***	2,500	2,500	***1***	2,500	2,500
Boy's PE Coaches Office/Lockers	1	300			300		1	300	300	1	150	150
Girl's PE Coaches Office/Lockers	1	300			300		1	300	300	1	150	150
Staff/Coach Toilet/Shower					0				0	2	150	300
Boy's Locker Room/Shower	1	1,900			1,900		1	1,900	1,900	1	1,900	1,900
Girl's Locker Room/Shower	1	1,900			1,900		1	1,900	1,900	1	1,900	1,900
Multi-purpose Toilet/Shower/Lockers	1	150			150		1	150	150	5	150	750
PE Storage	2	200			400		2	200	400	2	200	400
Training Room	1	580			580		1	580	580	1	580	580
School Team Room - Large	1	800	800	0	800		0	800	0	0	800	0
School Team Room							2	700	1,400	2	700	1,400
Athletic Storage - Large	1	1,000			1,000		1	1,000	1,000	1	1,000	1,000
Athletic Storage - Small	1	500			500		1	500	500	1	500	500
Concessions	1	100	200	1	100		1	150	150	1	150	150
Laundry Room	1	200			200		1	200	200	1	200	200

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
Uniform/Equipment Storage	1	1,000			1,000		1	1,000	1,000	1	1,000	1,000
Gym (auxiliary - practice)	1	5,700	7,500	1	5,700		***1***	5,700	5,700	***1***	5,700	5,700
Auxiliary gym bleachers	1	1,000			1,000		1	1,000	1,000	1	1,000	1,000
Auxiliary gym storage	1	500			500		1	500	500	1	500	500
Seasonal Sports Equipment Storage Lockers					0				0	100	3	300
Field Equipment Storage	1	1,000			1,000		1	2,000	2,000	0	2,000	0
Sub-Total Preferred			28,876									
Sub-Total Optional												
SUB-TOTAL REQUIRED PHYSICAL EDUCATION/ATHLETICS					***35,580***		**5**		***40,156***	**4**		***38,510***
EDUCATION SUPPORT												
Administration												
Reception/Lobby	1	400			400		1	400	400	1	400	400
Waiting Areas	1	100			100		1	100	100	1	100	100
Principal's Office	1	200			200		1	200	200	1	200	200
Principal's Secretary	1	125			125		1	125	125	1	125	125
Vice Principal's Office	2	150			300		3	150	450	3	150	450
Vice Principal's Secretary	2	120			240		2	120	240	2	120	240
Dean of Students	1	120			120		1	120	120	1	120	120
Teacher Planning/Collaboration Area			980	10	0		0	980	0	0	950	0
Teacher Planning/Collaboration Area - Small					0					4	500	2,000
TP/CA - English					0		1	980	980			0
TP/CA - Math					0		1	980	980			0
TP/CA - Social Studies					0		1	980	980			0
TP/CA - World Language					0		1	500	500			0
TP/CA - Science					0		1	980	980			0
TP/CA - PE & Health					0		1	500	500			0
TP/CA - Special Education					0		1	500	500			0
TP/CA small meeting rooms					0		7	100	700			0
Attendance	1	120			120		1	120	120	1	120	120
Bookkeeper	1	120			120		1	120	120	1	120	120
Resource Officer/Campus Monitor	1	200			200		1	200	200	1	200	200
Camera Monitors	1	100			100		1	100	100	1	100	100

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
Restrooms	2	60			120		2	60	120	2	75	150
Records Storage	1	200			200		1	200	200	0	200	0
Office Storage	1	125			125		1	125	125	1	125	125
Admin kitchenette					0				0	1	80	80
Business Manager	1	120			120		1	120	120	1	120	120
Health Office	1	120			120		1	120	120	1	200	200
Sick Room	1	150	150	2	150		1	150	150	1	260	260
Sick Toilet	1	100			100		1	100	100	1	100	100
Student Support/Mediation Office	1	700			700		1	700	700	0	700	0
Student Support/Mediation Support	1	300			300		1	300	300	1	300	300
Workroom/Mail/Delivery Process Center	1	300			300		1	300	300	1	300	300
Mail Room					0				0	1	120	120
Staff Room	1	400			400		1	400	400	0	400	0
Conference Rooms	2	150			300		2	150	300	2	150	300
Parent Volunteers/Family Resource/PTA/Boosters/Alumni Room	1	500			500		1	500	500	1	500	500
Sub-Total Optional			10,100									
Sub-Total Administration					***5,460***				**11,730**			**6,730**
Sub-Total Administration + Teacher Planning/Collaboration Areas					***15,260***				***11,730***			***6,730***
Counseling/Career					0							
Counseling Offices	5	120			600		5	120	600	5	120	600
Social Worker					0				0	1	120	120
Counseling Secretary/Waiting	1	400			400		1	400	400	1	400	400
Drug/Alcohol Counselor Office	1	125			125		1	125	125	1	125	125
Conference Room (large)	1	240			240		1	240	240	1	240	240
Conference Room (medium)	1	150			150		1	150	150	1	150	150
College & Career Center	1	700			700		1	980	980	1	950	950
Career Center Office	1	120			120		1	100	100	1	100	100
College Counselor	1	100			100		1	100	100	1	100	100
Secure Records Storage	1	180			180		1	180	180	1	180	180
Break Room					0				0	1	80	80
Restroom	2	60			120		2	60	120	2	60	120
Sub-Total Counseling/Career					***2,735***				**2,995**			**3,165**

PPS ED SPEC 2017SUMMARY						2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.								
AREA	Quant.	SF Room	SF Room	Quant.	Total	Quant.	SF Room	Total	Quant.	SF Room	Total
Student Activities											
Athletic Director	1	150			150	1	150	150	1	150	150
AD Support Staff	1	120			120	1	120	120	1	120	120
Sub-Total Student Activities					***270***			**270**			**270**
Technology Access											
Computer Lab (dedicated)	4	1,100			4,400	0	1,100	0	0	1,100	0
Computer Lab (non-specialized)	1	1,100			1,100	0	1,100	0	0	1,100	0
Computer Cart						3	80	240	0	80	0
Sub-Total Technology Access					***5,500***			**240**			**0**
Special Education (SPED)											
Sensory Support Room	1	900			900	***0***	900	0	***0***	900	0
Sensory Support (Active)						***1***	350	350	1	350	350
Sensory Support (Quiet)						***1***	150	150	1	150	150
Large Sensory Support Room [Quiet}								0	0	350	0
Learning Resource Center	3	900			2,700	***0***	900	0	0	980	0
Small Learning Resource Center						***5***	450	2,250	***5***	500	2,500
Intensive Skills Classes								0			0
Low Intensity Classroom (includes kitchen)	2	600			1,200	***2***	800	1,600	***2***	800	1,600
Social/Emotional Classroom					0	***1***	980	980	***1***	950	950
Storage	1	100			100	1	100	100	1	100	200
Reception	1	100			100	1	100	100	0	100	0
Conference	1	120			120	1	120	120	2	120	240
Office(s)	1	100			100	1	100	100	1	100	100
Qualified Mental Health Professional [QMHP] Office					0	1	200	200	1	200	200
Special Needs Toilet	1	200			200	1	200	200	1	200	200
Itinerants								0			0
Speech Pathologist offices	2	120			240	1	120	120	2	120	240
Psychologist Offices	2	120			240	2	120	240	2	120	240
Sub-Total SPED					***5,900***	**8**		**6,510**	**8**		**6,970**
Emerging Language Learning (ELL)											
Emergent Bi-Lingual Classroom	***1***	800			800	***1***	800	800	***1***	600	600
Sub-Total ELL						**1**		**800**	**1**		**600**

PPS ED SPEC 2017SUMMARY						2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.								
AREA	Quant.	SF Room	SF Room	Quant.	Total	Quant.	SF Room	Total	Quant.	SF Room	Total
Student Center											
Student Center/Commons: One lunch @ 600 students	1	7,800			7,800	1	7,800	7,800	1	7,800	7,800
Student Store, Coffee Cart Storage & Box Office						1	400	400	1	400	400
Main Servery	1	1,700	1,800	1	1,700	1	1,700	1,700	1	1,700	1,700
Food Prep/Kitchen	1	1,500			1,500	1	1,500	1,500	1	1,500	1,500
Dish Washing	1	200			200	1	200	200	1	200	200
Dry Storage/Cart Storage	1	500			500	1	500	500	1	500	500
Cooler	1	200			200	1	200	200	1	200	200
Freezer	1	200			200	1	200	200	1	200	200
Office	1	120			120	1	120	120	1	120	120
Staff Lockers/Dressing Rooms	1	150			150	1	150	150	1	150	150
Table Storage	1	250			250	1	500	500	1	500	500
Sub-Total Student Center			***1,800***		***12,620***			**13,270**			**13,270**
Media Center/Library											
Library	1	8,000	4,500	1	8,000	1	4,500	4,500	1	4,500	4,500
Office	2	120			240	2	120	240	1	120	120
Workroom	1	200			200	1	200	200	1	400	400
Text Storage	1	750			750	1	750	750	1	750	750
Collaboration Space	1	400			400	1	400	400	1	400	400
Multi-use Rooms	3	150			450	3	150	450	2	150	300
Multi-use Rooms									2	100	200
IT Repair/Tech Coordinator	1	180			180	1	400	400	1	180	180
Library Classroom			980	1		***1***	980	980	***0***	950	0
Sub-Total Media Center			***980***		***10,220***			**7,920**	***0***		**6,850**
Student Space											
Student Government Room/Office	1	200			200	1	200	200	1	200	200
Sub-Total Student Space					***200***			**200**			**200**
Custodial											
Custodial Office	1	250			250	1	250	250	1	250	250
Custodial staff office						1	300	300	1	300	300
Freight/Recieving						1	500	500	1	500	500
Custodial laundry						1	150	150	1	150	150
Building furniture storage						1	1,000	1,000	1	1,000	1,000

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
Custodial Rooms	10	100			1,000		10	150	1,500	10	150	1,500
Custodial Building Storage	1	2,000			2,000		1	2,000	2,000	1	500	500
Overstock Room					0				0	1	500	500
Material Storage/Teaching Supplies	1	500			500		1	1,500	1,500	1	200	200
Community Resiliency Storage					0		1	1,000	1,000	0	1,000	0
Flammable Storage	1	100			100		1	150	150	1	150	150
Sub-Total Custodial					***3,850***				**8,350**			**5,050**
Miscellaneous												
Lobby	1	2,000			2,000		1	2,000	2,000	1	2,000	2,000
Student Lockers	850	1			850		850	1	850	600	1	600
Student Toilets	12	250			3,000		12	250	3,000	10	600	6,000
Student Restroom	1	60	64	1	60		1	60	60	1	60	60
Gender Neutral Shower	1	100			100		1	100	100	0	100	0
Lactation Room							1	120	120	1	120	120
Boiler Room / Main Mech (Plant)	1	2,000			2,000		1	4,000	4,000	1	4,000	4,000
MDF	1	180			180		1	180	180	1	180	180
IDF	5	80			400		10	100	1,000	13	100	1,300
Main Electrical Room	1	240			240		1	1,200	1,200	1	1,200	1,200
Sub Electrical Room	5	75			375		8	100	800	8	100	800
Acid Storage					0				0	1	63	63
Fire Water Entry					0				0	1	250	250
Emergency Electrical Room					0		1	300	300	1	300	300
Water Entry					0		1	200	200	1	805	805
Satellite Water					0		1	120	120	2	120	240
Staff Restroom	10	70			700		10	85	850	10	85	850
DAS Pathway					0				0	4	20	80
Sprinkler Riser Valve Closet	1	60			60		1	60	60	8	20	160
Telecom					0				0	3	125	375
Elevator Control Room	1	80			80		4	80	320	3	80	240
Corridors	Variable						Variable			Variable		
Sub-Total Miscellaneous					***10,045***				**15,160**			**19,623**
SUB-TOTAL RECOMMENDED EDUCATIONAL SUPPORT					***67,400***				***67,445***			***62,728***

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
PARTNER & COMMUNITY USES												
Partner Program Office			150	1						2	120	240
Partner Program Storage										1	200	200
Pantry			200	1								
Clothing/Food Closet	1	1,200	2,000	1	1,200		1	1,200	1,200	1	250	250
After School Instruction			500	4							500	0
Sub-Total Preferred			2,000									
Sub-Total Optional Educational Support			***850***									
SUB-TOTAL COMMUNITY & PARTNER USES					***1,200***				***1,200***			***690***
WRAP AROUND SERVICE PROVIDERS												
Health Clinic	1	1600			1,600							
Reception							1	165	165	1	165	165
Waiting							1	500	500	1	500	500
Office							2	120	240	2	120	240
Office, Service Provider [shared]							1	160	160	1	160	160
Conference/Break							1	165	165	1	165	165
Lab							1	160	160	1	160	160
Restroom							1	80	80	1	80	80
Exam Room							2	110	220	2	110	220
Exam Room, accessbile/bariatric							1	130	130	1	130	130
Hall							1	225	225	1	225	225
Sub-Total Health Clinic							**12**		**2,045**			**2,045**

PPS ED SPEC 2017SUMMARY							2024 Comprehensive Plan			Phase 2 Cost Study		
	Rec.		Pref/Opp.									
AREA	Quant.	SF Room	SF Room	Quant.	Total		Quant.	SF Room	Total	Quant.	SF Room	Total
Teen Parent Services												
Infant Room	1	500	50	1	500		1	500	500	0	500	0
Breastfeeding Room			50	1			1	65	65	0	65	0
Toddler Room	1	500			500		1	500	500	0	500	0
Crawler Room	1	500			500		1	500	500	0	500	0
Restroom	1	50			50		1	85	85	0	85	0
Toddler toilet room							1	90	90	0	90	0
Changing Area	1	50			50		1	50	50	0	50	0
Nap Area	1	200			200		1	200	200	0	200	0
Storage/Kitchen	1	300			300		1	300	300	0	300	0
Hallway									0	0		0
Office							1	200	200	0	200	0
Sub-Total Teen Parent Services					***2,100***		**10**		**2,490**	**0**		**0**
Office Space Social Service Providers (Includes SUN, STEP UP and ESL)			200	5			2	200	400	0	200	0
Classroom(s)	2	500			1,000		2	500	1,000	0	500	0
SUB-TOTAL WRAP AROUND SERVICE PROVIDERS					***4,700***				**5,935**			***2,045***

IBW Phase 2 Cost Reduction Study 2025 - Appendix 2: Education Specification Deviation Request Log

PPS Ida B Wells High School Modernization

Phase 2 Cost Reduction Study Date

Proposed Deviations from PPS Education Specification (Ed Spec)

Document	Section	Division	Room Description	Originating Document	Ed Spec Page #	Subject	Ed Spec Area	Proposed Area	Delta	Comment / Proposed Deviation	By	On (Date)	PPS Response	On (Date)2
Ed Spec	CORE PROGRAM	Career Prep / CTE	Classrooms	2017 Education Specification	TBD	Delete room[s]	4,800	-	(4,800)	Ed Spec placeholder removed; finer grain detail for CTE added.	Bora	12/14/23	response needed here	date here
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Wood Shop	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	3,500	3,500	IBW CTE program space; size redued per direction from OSM to removed Tiny House program area	Bora	4/17/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Engineering	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	1,350	1,350	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Sound Engineering	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	1,650	1,650	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Sound Engineering Studio Space	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	400	400	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Computer Science Classroom - regular	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	950	950	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Computer Science Classroom - large	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	1,350	1,350	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Robotics Storage	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	300	300	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Journalism	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	950	950	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Business	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	950	950	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE SHARED Audio/Video Recording Suite	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	750	750	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Computer Lab: accounting/finance/intro to biz	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	950	950	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Costuming Storage	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	400	400	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Health Occupations Classroom	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	950	950	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Health Occupations Lab	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	950	950	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Photography [Digital and Analog]	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	1,200	1,200	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Photography lighting studio	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	300	300	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Printmaking Classroom	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	1,500	1,500	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	CTE Photography and Screen-printing darkroom and washout	2025 Phase 2 Cost Reduction Study	TBD	Added room, CTE	-	500	500	IBW CTE program space	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Career Prep / CTE	Maker Space	2017 Education Specification	TBD	No deviation required	1,200	1,200	-		Bora			
Ed Spec	CORE PROGRAM	General Education Classroom	English	2017 Education Specification	TBD	Decrease room size	10,780	10,450	(330)	Classroom size reduced from 980 SF to 950 SF	Bora	3/7/25		
Ed Spec	CORE PROGRAM	General Education Classroom	Math	2017 Education Specification	TBD	Decrease room size	7,840	7,600	(240)	Classroom size reduced from 980 SF to 950 SF	Bora	3/7/25		
Ed Spec	CORE PROGRAM	General Education Classroom	Social Studies	2017 Education Specification	TBD	Decrease room size	7,840	7,600	(240)	Classroom size reduced from 980 SF to 950 SF	Bora	3/7/25		
Ed Spec	CORE PROGRAM	General Education Classroom	Health	2017 Education Specification	TBD	Decrease room size	1,960	1,900	(60)	Classroom size reduced from 980 SF to 950 SF	Bora	3/7/25		
Ed Spec	CORE PROGRAM	General Education Classroom	World Language	2017 Education Specification	TBD	Decrease room size	5,880	5,700	(180)	Classroom size reduced from 980 SF to 950 SF	Bora	3/7/25		
Ed Spec	CORE PROGRAM	General Education Classroom	Electives	2017 Education Specification	TBD	Delete room[s]	5,880	-	(5,880)	All elective space reallocated to CTE programs	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Specialized Classrooms	Science Lab	2017 Education Specification	TBD	No deviation required	16,500	16,500	-					
Ed Spec	CORE PROGRAM	Specialized Classrooms	Chemical Storage	2017 Education Specification	TBD	No deviation required	180	180	-					
Ed Spec	CORE PROGRAM	Specialized Classrooms	Prep Rooms	2017 Education Specification	TBD	Added room[s]	1,000	800	(200)	One additional Prep room added		3/7/25		
Ed Spec	CORE PROGRAM	Smaller Instructional Spaces	Smaller Instructional Spaces	2017 Education Specification	TBD	Optional Ed Spec room	-	1,000	1,000	2 x 500 SF rooms [Optional]	Bora	3/7/25		
Ed Spec	CORE PROGRAM	Flexible Learning Areas	Flexible Learning Areas	2017 Education Specification	TBD	Optional Ed Spec room	-	2,600	2,600	4 x 650 SF rooms ILO optional 8 x1,000 SF spaces	Bora	3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Fine & Visual Arts	Art Room (2D)	2017 Education Specification	TBD	No deviation required	1,200	1,200	-					
Ed Spec	FINE & PERFORMING ARTS	Fine & Visual Arts	Art Room (3D)	2017 Education Specification	TBD	No deviation required	1,500	1,500	-					
Ed Spec	FINE & PERFORMING ARTS	Fine & Visual Arts	Kiln Room	2017 Education Specification	TBD	Increase room size	100	200	100	As directed by PPS in 2023, to support third kiln	Bora	12/14/23		
Ed Spec	FINE & PERFORMING ARTS	Fine & Visual Arts	Supply /Storage	2017 Education Specification	TBD	Increase room size	160	320	160	As requested by stakeholders	Bora	3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Fine & Visual Arrts	Art Office(s)	2017 Education Specification	TBD	Delete room[s]	120	-	(120)	Delete Art office; reallocate space to storage.		3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Band Room	2017 Education Specification	TBD	Increase room size	2,200	2,400	200	Optional larger room in Ed Spec; reflects VAPA desire for larger room	Bora	3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Large Instrument Storage Room	2017 Education Specification	TBD	No deviation required	250	250	-					
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Music Library & Uniform Storage	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Small Equipment Storage	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Large Practice Rooms/Music Lab	2017 Education Specification	TBD	No deviation required	300	300	-					
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Small Practice Rooms	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	FINE & PERFORMING ARTS	Band / Orchestra	Band Office	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	FINE & PERFORMING ARTS	Choir	Choir Room	2017 Education Specification	TBD	Optional Ed Spec room	-	1,500	1,500	Chior room is optional in Ed Spec; Choir is a CTE program at Wells.	Bora	3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Choir	Choir Office / Music Library / Practice Room	Phase 1 Programming	N/A	Added room[s]	-	200	200	Requested during 2/24 IBW Leadership review	Bora	3/7/25		
		Choir	Choir practice room	2024 SD Phase	N/A	Added room[s]	-	100	100		Bora	3/7/25		
		Choir	Equipment & Robe Storage / Practice Room	2024 SD Phase	N/A	Added room[s]	-	200	200		Bora	3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Theater (500 seat)	2017 Education Specification	TBD	Increase room size	5,000	6,000	1,000	Optional larger room in Ed Spec	Bora	3/7/25		
			Follow Spot	Phase 1 Programming	N/A	Added room[s]	-	140	140	Added room per prior discussion	Bora	6/17/25		
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Orchestra Pit	2017 Education Specification	TBD	No deviation required	500	500	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Stage	2017 Education Specification	TBD	No deviation required	3,500	3,500	-					
		Theater / Dance	Piano Storage	2024 SD Phase	N/A	Added room[s]	-	80	80	Added room or alcove per stakeholder request	Bora	3/7/25		

Document	Section	Division	Room Description	Originating Document	Ed Spec Page #	Subject	Ed Spec Area	Proposed Area	Delta	Comment / Proposed Deviation	By	On (Date)	PPS Response	On (Date)2
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Drama Classroom/Black Box	2017 Education Specification	TBD	No deviation required	1,600	1,600	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Laundry	2017 Education Specification	TBD	No deviation required	150	150	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Control Room	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Sound Booth	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Office	2017 Education Specification	TBD	increase room size	70	100	30	Enlarge to match Ed Spec standard office size	Bora	3/7/25		
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Box Office/Tickets	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Concession Stand	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Scene Shop	2017 Education Specification	TBD	No deviation required	1,500	1,500	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Equipment Storage	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Lighting Storage	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Costume Storage	2017 Education Specification	TBD	No deviation required	400	400	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Make-up Room	2017 Education Specification	TBD	No deviation required	400	400	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Boy's Dressing	2017 Education Specification	TBD	No deviation required	250	250	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Girl's Dressing	2017 Education Specification	TBD	No deviation required	250	250	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Girl's Toilet	2017 Education Specification	TBD	No deviation required	130	130	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Boy's Toilet	2017 Education Specification	TBD	No deviation required	130	130	-					
Ed Spec	FINE & PERFORMING ARTS	Theater / Dance	Green Room	2017 Education Specification	TBD	No deviation required			-	Not included in program; optional space in Ed Spec	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Gym (large; two teaching stations)	2017 Education Specification	TBD	Increase room size	13,000	15,080	2,080	Per OSM direction 4/17/2025 to ensure safe run outs.	Bora	4/17/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Mat/Wrestling/Dance	2017 Education Specification	TBD	No deviation required	2,750	2,750	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Mat Room Storage	2025 Phase 2 Cost Reduction Study	N/A	Added room[s]	-	300	300	To support multi use of Mat Room	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Weight Room/Aerobics/Spinning	2017 Education Specification	TBD	No deviation required	2,500	2,500	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Boy's PE Coaches Office/Toilet/Shower/Lockers	2017 Education Specification	TBD	No deviation required	300	300	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Girl's PE Coaches Office/Toilet/Shower/Lockers	2017 Education Specification	TBD	No deviation required	300	300	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Boy's Locker Room/Shower	2017 Education Specification	TBD	No deviation required	1,900	1,900	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Girl's Locker Room/Shower	2017 Education Specification	TBD	No deviation required	1,900	1,900	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Multi-purpose Toilet/Shower	2024 SD Phase	TBD	Added room[s]	150	750	600	Added to provide expanded gender inclusive option	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	PE Storage	2017 Education Specification	TBD	No deviation required	400	400	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Training Room	2017 Education Specification	TBD	No deviation required	580	580	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	School Team Room - Large	2017 Education Specification	TBD	Delete room[s]	800	-	(800)	Per 12/23 workshops - based on lessons learned at other PPS modernized high schools [see next item]	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	School Team Room	Phase 1 Programming	N/A	Added room[s]		1,400	1,400	Per 12/23 workshops - based on lessons learned at other PPS modernized high schools. Two team rooms needed to support multiple simultaneous events	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Athletic Storage - Large	2017 Education Specification	TBD	No deviation required	1,000	1,000	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Athletic Storage - Small	2017 Education Specification	TBD	No deviation required	500	500	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Concessions	2017 Education Specification	TBD	Increase room size	100	150	50	Per 12/23 workshops - based on lessons learned at other PPS modernized high schools	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Laundry Room	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Uniform/Equipment Storage	2017 Education Specification	TBD	No deviation required	1,000	1,000	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Gym (auxiliary - practice)	2017 Education Specification	TBD	No deviation required	5,700	5,700	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Auxiliary gym bleachers	2017 Education Specification	TBD	No deviation required	1,000	1,000	-					
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Auxiliary gym storage	2017 Education Specification	TBD	No deviation required	500	500	-					
		PE / Athletics	Seasonal Equipment Storage	2024 SD Phase	TBD	Added room[s]	-	300	300	Added dedicated lockers to improve student use - sized for larger equipment	Bora	3/7/25		
Ed Spec	PHYSICAL EDUCATION / ATHLETICS	PE / Athletics	Field Equipment Storage	2025 Phase 2 Cost Reduction Study	TBD	Delete room[s]	1,000	-	(1,000)	Removed from building program; to be part of site buildings	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Reception/Lobby	2017 Education Specification	TBD	No deviation required	400	400	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Waiting Areas	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Principal's Office	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Principal's Secretary	2017 Education Specification	TBD	No deviation required	125	125	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Vice Principal's Office	2017 Education Specification	TBD	Added room[s]	300	450	150	Per 12/23 workshops - based on lessons learned at other PPS modernized high schools	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Vice Principal's Secretary	2017 Education Specification	TBD	No deviation required	240	240	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Dean of Students	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Teacher Planning/Collaboration Area	2025 Phase 2 Cost Reduction Study	TBD	Optional Ed Spec room	-	2,000	2,000	4 x 500 SF rooms ILO OPTIONAL 10 x 980 SF rooms	Bora	3/7/25		

Document	Section	Division	Room Description	Originating Document	Ed Spec Page #	Subject	Ed Spec Area	Proposed Area	Delta	Comment / Proposed Deviation	By	On (Date)	PPS Response	On (Date)2
Ed Spec	EDUCATION SUPPORT	Adminstration	Attendance	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Bookkeeper	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Resource Officer/Campus Monitor	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Camera Monitors	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Restrooms	2017 Education Specification	TBD	Increase room size	120	150	30	Larger individual rooms to meet current code	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Records Storage	2024 SD Phase	TBD	Delete room[s]	200	-	(200)	Not needed per IBW Admin	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Office Storage	2017 Education Specification	TBD	No deviation required	125	125	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Business Manager	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Health Office	2024 SD Phase	TBD	Increase room size	120	200	80	Larger room per prior discussion	Bora	6/17/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Sick Room	2024 SD Phase	TBD	Increase room size	150	260	110	Larger room to accomdate additional student	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Sick Toilet	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Student Support/Mediation Office	2024 SD Phase	TBD	Delete room[s]	700	-	(700)	Not needed per IBW Admin	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Student Support/Mediation Support	2017 Education Specification	TBD	No deviation required	300	300	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Workroom/Mail/Delivery Process Center	2017 Education Specification	TBD	No deviation required	300	300	-	[not located in Admin Suite - additional mail room needed on L1]	Bora	3/7/25		
		Adminstration	Mail Room	2024 SD Phase	TBD	Added room[s]	-	120	120	Added room to support effective admistrative need	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Staff Room	2024 SD Phase	TBD	Delete room[s]	400	-	(400)	Offset with four distributed Teacher Planning spaces	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Adminstration	Conference Rooms	2017 Education Specification	TBD	No deviation required	300	300	-					
Ed Spec	EDUCATION SUPPORT	Adminstration	Parent Volunteers/Family Resource/PTA/Boosters/Alumni Room	2017 Education Specification	TBD	No deviation required	500	500	-					
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Counseling Offices	2017 Education Specification	TBD	No deviation required	600	600	-					
		Counseling / Career	Social Worker Office	2024 SD Phase	TBD	Added room[s]	-	120	120	Added per IBW Admin request	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Counseling Secretary/Waiting	2017 Education Specification	TBD	No deviation required	400	400	-					
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Drug/Alcohol Counselor Office	2017 Education Specification	TBD	No deviation required	125	125	-					
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Conference Room (large)	2017 Education Specification	TBD	No deviation required	240	240	-					
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Conference Room (medium)	2017 Education Specification	TBD	No deviation required	150	150	-					
Ed Spec	EDUCATION SUPPORT	Counseling / Career	College & Career Center	2017 Education Specification	TBD	increase room size	700	950	250	Per 2/24 IBW Leadership meetings, change name and increase size to standard classroom size	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Career Center Office	2017 Education Specification	TBD	Decrease room size	120	100	(20)	Per 2/24 IBW Leadership meetings, reduce size of this office	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Counseling / Career	College Counselor	2017 Education Specification	TBD	Change room name	100	100	-	Per 2/24 IBW Leadership meeitng, change room name	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Secure Records Storage	2017 Education Specification	TBD	No deviation required	180	180	-					
		Counseling / Career	Break Room	2024 SD Phase	TBD	Added room[s]	-	80	80	Added per stakeholder request	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Counseling / Career	Restroom	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Student Activities	Athletic Director	2017 Education Specification	TBD	No deviation required	150	150	-					
Ed Spec	EDUCATION SUPPORT	Student Activities	AD Support Staff	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Technology Access	Computer Lab (dedicated)	2017 Education Specification	TBD	Delete room[s]	4,400	-	(4,400)	Per 12/2023 Workshops; retain one non-specialzed lab but remove all dedicated labs. Multiple CTE programs will have dedicated computers	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Technology Access	Computer Lab (non-specialized)	2017 Education Specification	TBD	Delete room[s]	1,100	-	(1,100)	Per 2/24 IBW Leadership meeting, all computer classrooms are subject specific	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Sensory Support Room	2017 Education Specification	TBD	Delete room[s]	900	-	(900)	3/7/24: deleted to reflect lessons learned	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Sensory Support Room (Active)	Phase 1 Programming	TBD	Added room[s]	-	350	350	3/7/24: added to reflect lessons learned	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Sensory Support Room (Quiet)	Phase 1 Programming	TBD	Added room[s]	-	150	150	3/7/24: added to reflect lessons learned	Bora	3/7/25		
		Special Education	Large Sensory Support Room [Quiet]	2024 SD Phase	TBD	Added room[s]	-	350	350	Added per stakeholder request	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Learning Resource Center	2017 Education Specification	TBD	No deviation required	2,700	-	(2,700)	Per 2/24 IBW Leadership meetings, request 5 smaller rooms shown below	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Learning Resource Center [small]	Phase 1 Programming	TBD	Added room[s]		2,500	2,500	Per 2/24 IBW Leadership meetings, request 5 smaller rooms ILO 3 larger	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Intensive Skills Classes	2017 Education Specification	TBD	No deviation required			-					
Ed Spec	EDUCATION SUPPORT	Special Education	Low Intensity Classroom (includes kitchen)	2017 Education Specification	TBD	Increase room size	1,200	1,600	400	3/7/24: added to reflect lessons learned	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Social / Emotional Classroom	2024 SD Phase		Added room[s]		950	950	Per 2/24 IBW Leadership meetings, added room to reflect current program	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Storage	2017 Education Specification	TBD	Added room[s]	-	100	100					
Ed Spec	EDUCATION SUPPORT	Special Education	Reception	2024 SD Phase	TBD	Delete room[s]	100	-	(100)	Removed per stakeholder request	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Conference	2024 SD Phase	TBD	Added room[s]	120	240	120	Added per stakeholder request	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Office(s)	2017 Education Specification	TBD	No deviation required	100	100	-					
Ed Spec	EDUCATION SUPPORT	Special Education	Qualified Mental Health Professional [QMHP] Office			Added room[s]		200	200	Per 2/24 IBW Leadership meetings, added room to reflect current program	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Special Education	Special Needs Toilet	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	EDUCATION SUPPORT	Special Education	Itinerants	2017 Education Specification	TBD	No deviation required			-					
Ed Spec	EDUCATION SUPPORT	Special Education	Speech Pathologist offices	2017 Education Specification	TBD	No deviation required	240	240	-					
Ed Spec	EDUCATION SUPPORT	Special Education	Psychologist Offices	2017 Education Specification	TBD	No deviation required	240	240	-					
Ed Spec	EDUCATION SUPPORT	Emerging Language	Emergent Bi-Lingual Classroom	2024 SD Phase	TBD	Decrease room size	800	600	(200)	Smaller student population	Bora	6/17/25		
Ed Spec	EDUCATION SUPPORT	Student Center	Student Center/Commons: One lunch @ 600 students	2017 Education Specification	TBD	No deviation required	7,800	7,800	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Student Store & Coffee Cart Storage	Phase 1 Programming	N/A	Added room[s]		400	400	Per 12/23 workshops - based on lessons learned at other PPS modernized high schools	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Student Center	Main Servery	2017 Education Specification	TBD	No deviation required	1,700	1,700	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Food Prep/Kitchen	2017 Education Specification	TBD	No deviation required	1,500	1,500	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Dish Washing	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Dry Storage/Cart Storage	2017 Education Specification	TBD	No deviation required	500	500	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Cooler	2017 Education Specification	TBD	No deviation required	200	200	-					

Document	Section	Division	Room Description	Originating Document	Ed Spec Page #	Subject	Ed Spec Area	Proposed Area	Delta	Comment / Proposed Deviation	By	On (Date)	PPS Response	On (Date)2
Ed Spec	EDUCATION SUPPORT	Student Center	Freezer	2017 Education Specification	TBD	No deviation required	200	200	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Office	2017 Education Specification	TBD	No deviation required	120	120	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Staff Lockers/Dressing Rooms	2017 Education Specification	TBD	No deviation required	150	150	-					
Ed Spec	EDUCATION SUPPORT	Student Center	Table Storage	2017 Education Specification	TBD	Increase room size	250	500	250	Per 12/23 workshops - based on lessons learned at other PPS modernized high schools	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Media Center / Library	Library	2017 Education Specification	TBD	Optional Ed Spec room	8,000	4,500	(3,500)	Smaller library is standard option for new HS designs. See Ed Spec footnotes.	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Media Center / Library	Office	2024 SD Phase	TBD	Delete room[s]	240	120	(120)	Removed per stakeholder request				
Ed Spec	EDUCATION SUPPORT	Media Center / Library	Workroom	2024 SD Phase	TBD	Increase room size	200	400	200	Added per stakeholder request				
Ed Spec	EDUCATION SUPPORT	Media Center / Library	Text Storage	2017 Education Specification	TBD	No deviation required	750	750	-					
Ed Spec	EDUCATION SUPPORT	Media Center / Library	Collaboration Space	2017 Education Specification	TBD	No deviation required	400	400	-					
Ed Spec	EDUCATION SUPPORT	Media Center / Library	Multi-use Rooms	2024 SD Phase	TBD	Increase room size	450	500	50	four rooms ILO three rooms	Bora	3/7/25		
Ed Spec	EDUCATION SUPPORT	Media Center / Library	IT Repair/Tech Coordinator	2017 Education Specification	TBD	No deviation required	180	180	-					
Ed Spec	EDUCATION SUPPORT	Student Space	Student Government Room/Office	2017 Education Specification	TBD	No deviation required	200	200	-					

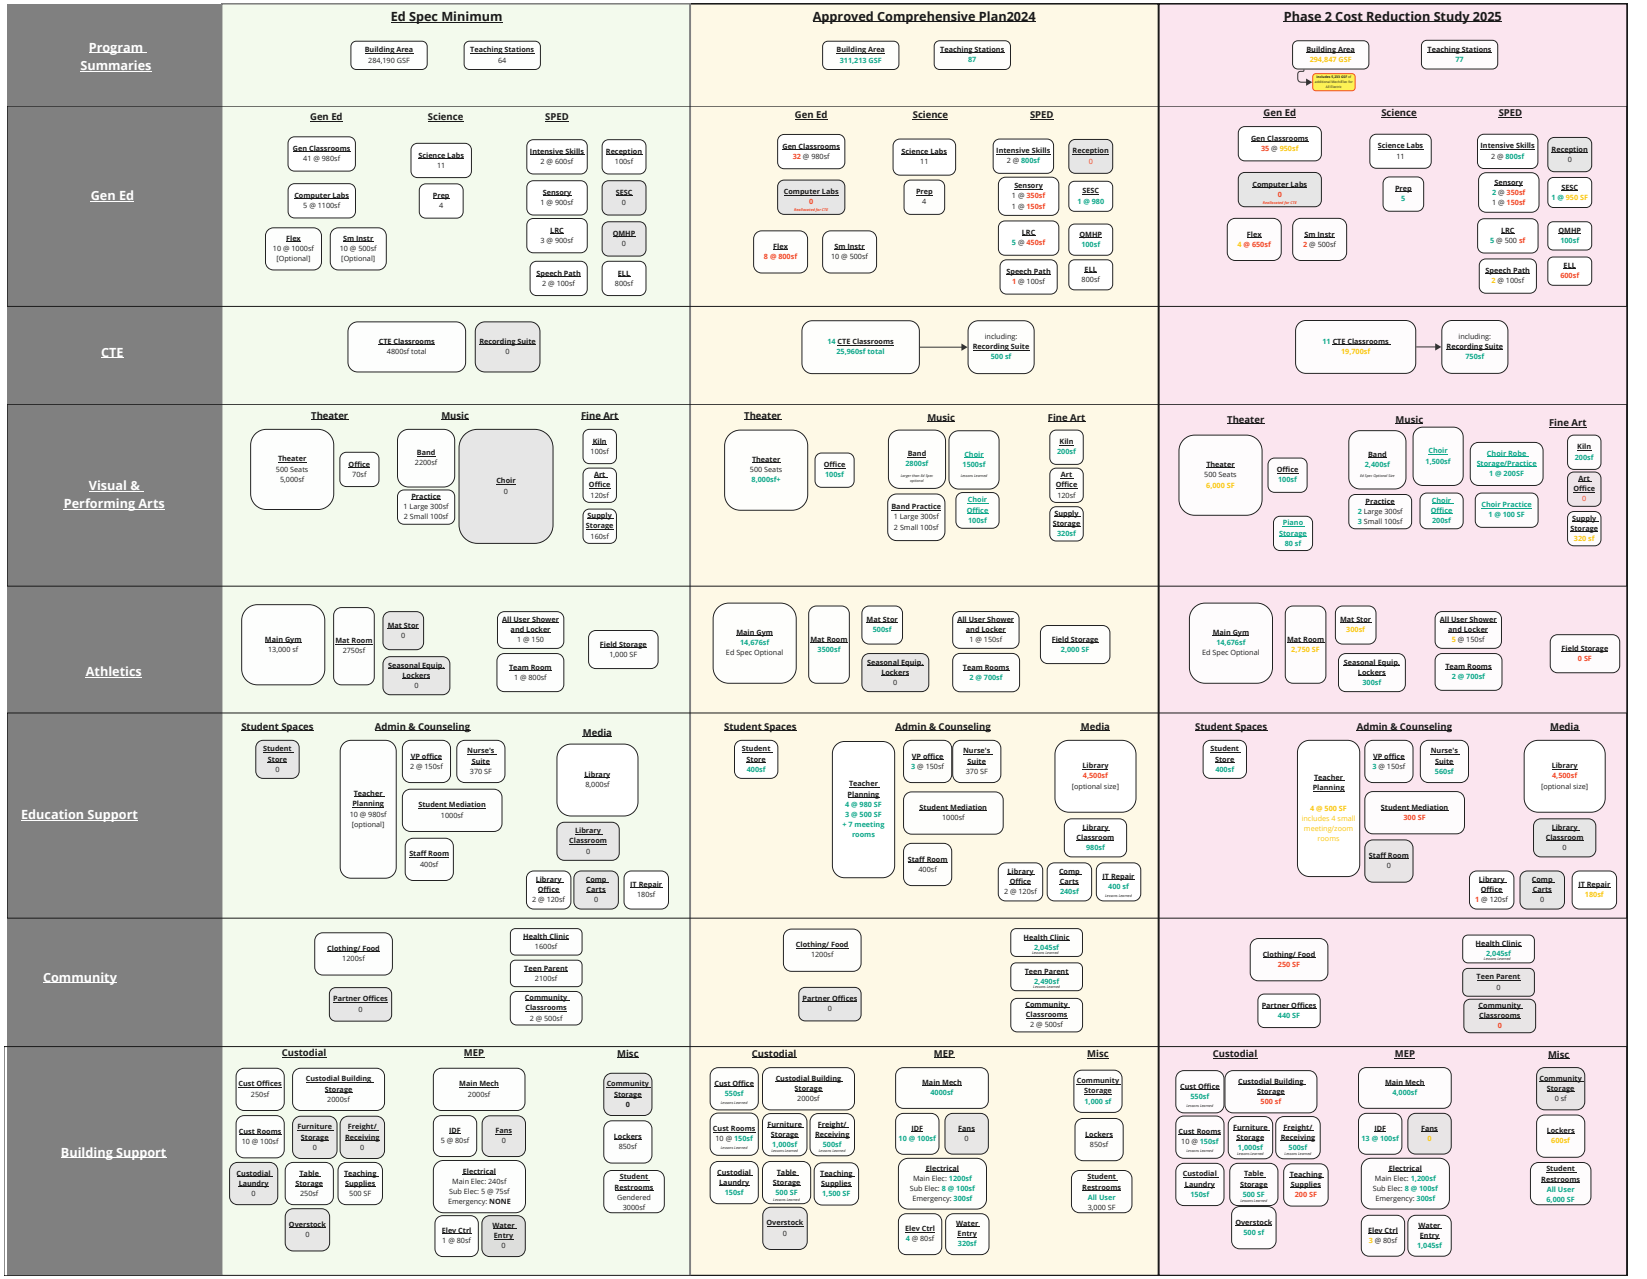
Program Summaries
Gen Ed
CTE
Visual & Performing Arts
Athletics
Education Support
Community
Building Support
Ed Spec Minimum
Building Area 284,190 GSF
Teaching Stations 64
Gen Ed
Gen Classrooms 41 @ 980sf
Computer Labs 5 @ 1100sf
Flex 10 @ 1000sf [Optional]
Sm Instr 10 @ 500sf [Optional]
Science
Science Labs 11
Prep 4
SPED
Intensive Skills 2 @ 600sf
Sensory 1 @ 900sf
LRC 3 @ 900sf
Speech Path 2 @ 100sf
Reception 100sf
SESC 0
OMHP 0
ELL 800sf
CTE Classrooms 4800sf total
Recording Suite 0
Theater
Theater 500 Seats 5,000sf
Office 70sf
Music
Band 2200sf
Practice 1 Large 300sf 2 Small 100sf
Choir 0
Fine Art
Kiln 100sf
Art Office 120sf
Supply Storage 160sf
Main Gym 13,000 sf
Mat Room 2750sf
Mat Stor 0
Seasonal Equip. Lockers 0
All User Shower and Locker 1 @ 150
Team Room 1 @ 800sf
Field Storage 1,000 SF
Student Spaces
Student Store 0
Admin & Counseling
Teacher Planning 10 @ 980sf [optional]
VP office 2 @ 150sf
Nurse's Suite 370 SF
Student Mediation 1000sf
Staff Room 400sf
Media
Library 8,000sf
Library Classroom 0
Library Office 2 @ 120sf
Comp. Carts 0
IT Repair 180sf
Clothing/ Food 1200sf
Partner Offices 0
Health Clinic 1600sf
Teen Parent 2100sf
Community Classrooms 2 @ 500sf
Custodial
Cust Offices 250sf
Custodial Building Storage 2000sf
Cust Rooms 10 @ 100sf
Furniture Storage 0
Freight/ Receiving 0
Custodial Laundry 0
Table Storage 250sf
Teaching Supplies 500 SF
Overstock 0
MEP
Main Mech 2000sf
IDF 5 @ 80sf
Fans 0
Electrical Main Elec: 240sf Sub Elec: 5 @ 75sf Emergency: NONE
Elev Ctrl 1 @ 80sf
Water Entry 0
Misc
Community Storage 0
Lockers 850sf
Student Restrooms Gendered 3000sf
Approved Comprehensive Plan2024
Building Area 311,213 GSF
Teaching Stations 87
Gen Ed
Gen Classrooms 32 @ 980sf
Computer Labs 0 Reallocated for CTE
Flex 8 @ 800sf
Sm Instr 10 @ 500sf
Science
Science Labs 11
Prep 4
SPED
Intensive Skills 2 @ 800sf
Sensory 1 @ 350sf 1 @ 150sf
LRC 5 @ 450sf
Speech Path 1 @ 100sf
Reception 0
SESC 1 @ 980
OMHP 100sf
ELL 800sf
14 CTE Classrooms 25,960sf total
including: Recording Suite 500 sf
Theater
Theater 500 Seats 8,000sf+
Office 100sf
Music
Band 2800sf
Choir 1500sf
Band Practice 1 Large 300sf 2 Small 100sf
Choir Office 100sf
Fine Art
Kiln 200sf
Art Office 120sf
Supply Storage 320sf
Main Gym 14,676sf Ed Spec Optional
Mat Room 3500sf
Mat Stor 500sf
Seasonal Equip. Lockers 0
All User Shower and Locker 1 @ 150sf
Team Rooms 2 @ 700sf
Field Storage 2,000 SF
Student Spaces
Student Store 400sf
Admin & Counseling
Teacher Planning 4 @ 980 SF 3 @ 500 SF + 7 meeting rooms
VP office 3 @ 150sf
Nurse's Suite 370 SF
Student Mediation 1000sf
Staff Room 400sf
Media
Library 4,500sf [optional size]
Library Classroom 980sf
Library Office 2 @ 120sf
Comp. Carts 240sf
IT Repair 400 sf
Clothing/ Food 1200sf
Partner Offices 0
Health Clinic 2,045sf
Teen Parent 2,490sf
Community Classrooms 2 @ 500sf
Custodial
Cust Office 550sf
Custodial Building Storage 2000sf
Cust Rooms 10 @ 150sf
Furniture Storage 1,000sf
Freight/ Receiving 500sf
Custodial Laundry 150sf
Table Storage 500 SF
Teaching Supplies 1,500 SF
Overstock 0
MEP
Main Mech 4000sf
IDF 10 @ 100sf
Fans 0
Electrical Main Elec: 1200sf Sub Elec: 8 @ 100sf Emergency: 300sf
Elev Ctrl 4 @ 80sf
Water Entry 320sf
Misc
Community Storage 1,000 sf
Lockers 850sf
Student Restrooms All User 3,000 SF
Phase 2 Cost Reduction Study 2025
Building Area 294,847 GSF
Teaching Stations 77
Gen Ed
Gen Classrooms 35 @ 950sf
Computer Labs 0 Reallocated for CTE
Flex 4 @ 650sf
Sm Instr 2 @ 500sf
Science
Science Labs 11
Prep 5
SPED
Intensive Skills 2 @ 800sf
Sensory 2 @ 350sf 1 @ 150sf
LRC 5 @ 500 sf
Speech Path 2 @ 100sf
Reception 0
SESC 1 @ 950 SF
OMHP 100sf
ELL 600sf
11 CTE Classrooms 19,700sf
including: Recording Suite 750sf
Theater
Theater 500 Seats 6,000 SF
Office 100sf
Piano Storage 80 sf
Music
Band 2,400sf
Practice 2 Large 300sf 3 Small 100sf
Choir 1,500sf
Choir Office 200sf
Choir Robe Storage/Practice 1 @ 200SF
Choir Practice 1 @ 100 SF
Fine Art
Kiln 200sf
Art Office 0
Supply Storage 320 sf
Main Gym 14,676sf Ed Spec Optional
Mat Room 2,750 SF
Mat Stor 300sf
Seasonal Equip. Lockers 300sf
All User Shower and Locker 1 @ 150sf
Team Rooms 2 @ 700sf
Field Storage 0 SF
Student Spaces
Student Store 400sf
Admin & Counseling
Teacher Planning 4 @ 500 SF Includes 4 small meeting/zoom rooms
VP office 3 @ 150sf
Nurse's Suite 560sf
Student Mediation 300 SF
Staff Room 0
Media
Library 4,500sf [optional size]
Library Classroom 0
Library Office 1 @ 120sf
Comp. Carts 0
IT Repair 180sf
Clothing/ Food 250 SF
Partner Offices 440 SF
Health Clinic 2,045sf
Teen Parent 0
Community Classrooms 0
Custodial
Cust Office 550sf
Custodial Building Storage 500 sf
Cust Rooms 10 @ 150sf
Furniture Storage 1,000sf
Freight/ Receiving 500sf
Custodial Laundry 150sf
Table Storage 500 SF
Teaching Supplies 200 SF
Overstock 500 sf
MEP
Main Mech 4,000sf
IDF 13 @ 100sf
Fans 0
Electrical Main Elec: 1,200sf Sub Elec: 8 @ 100sf Emergency: 300sf
Elev Ctrl 3 @ 80sf
Water Entry 1,045sf
Misc
Community Storage 0 sf
Lockers 600sf
Student Restrooms All User 6,000 SF
KEY
Meets Ed Spec
Below Ed Spec
Exceeds Ed Spec
Reduced from 100% SD
Not Included

Lower Level, Cost Reduction Study Phase

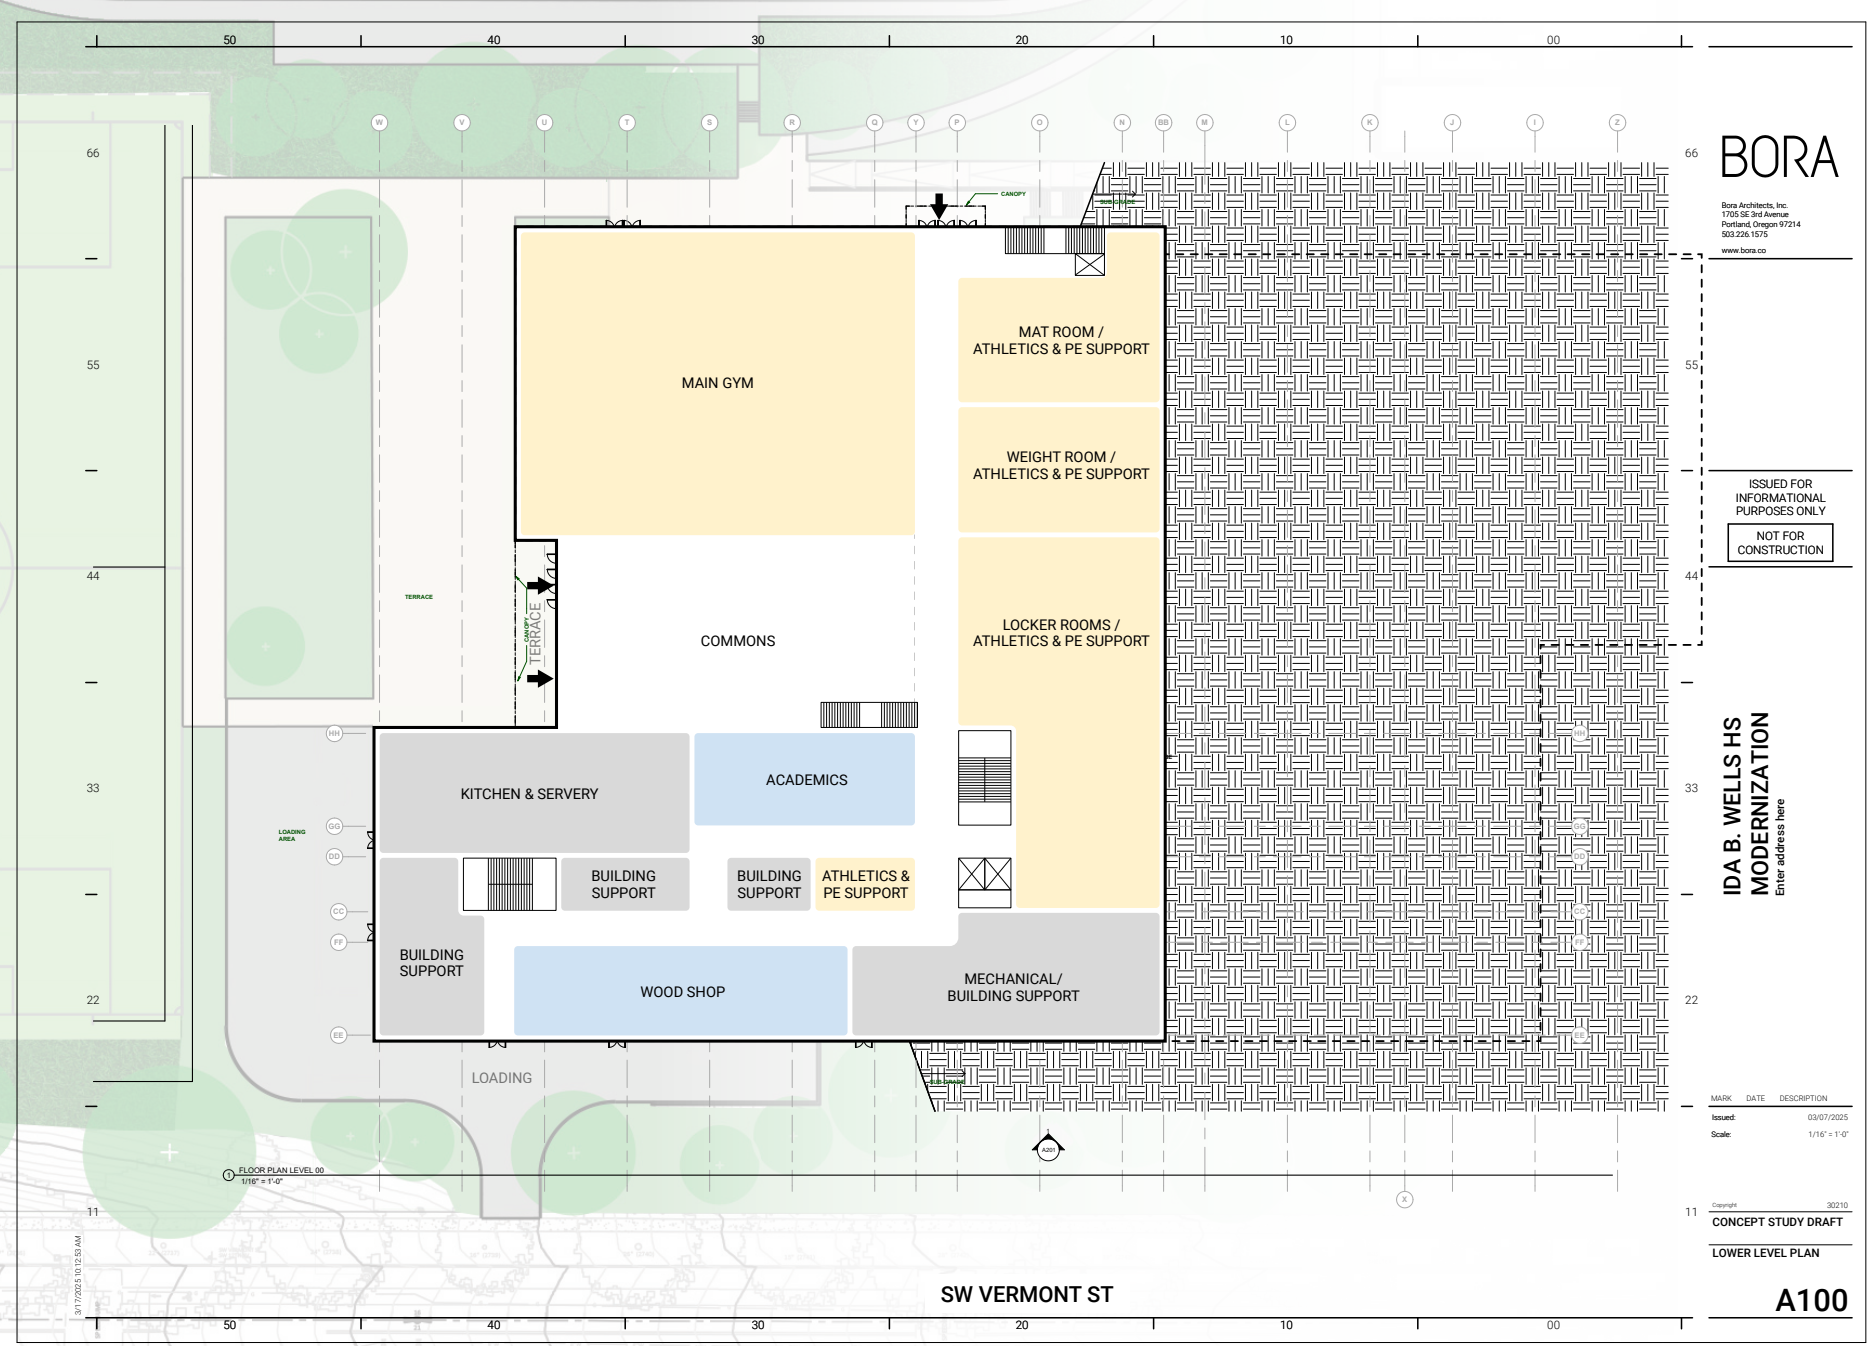

Lower Level, Schematic Design, August 2025

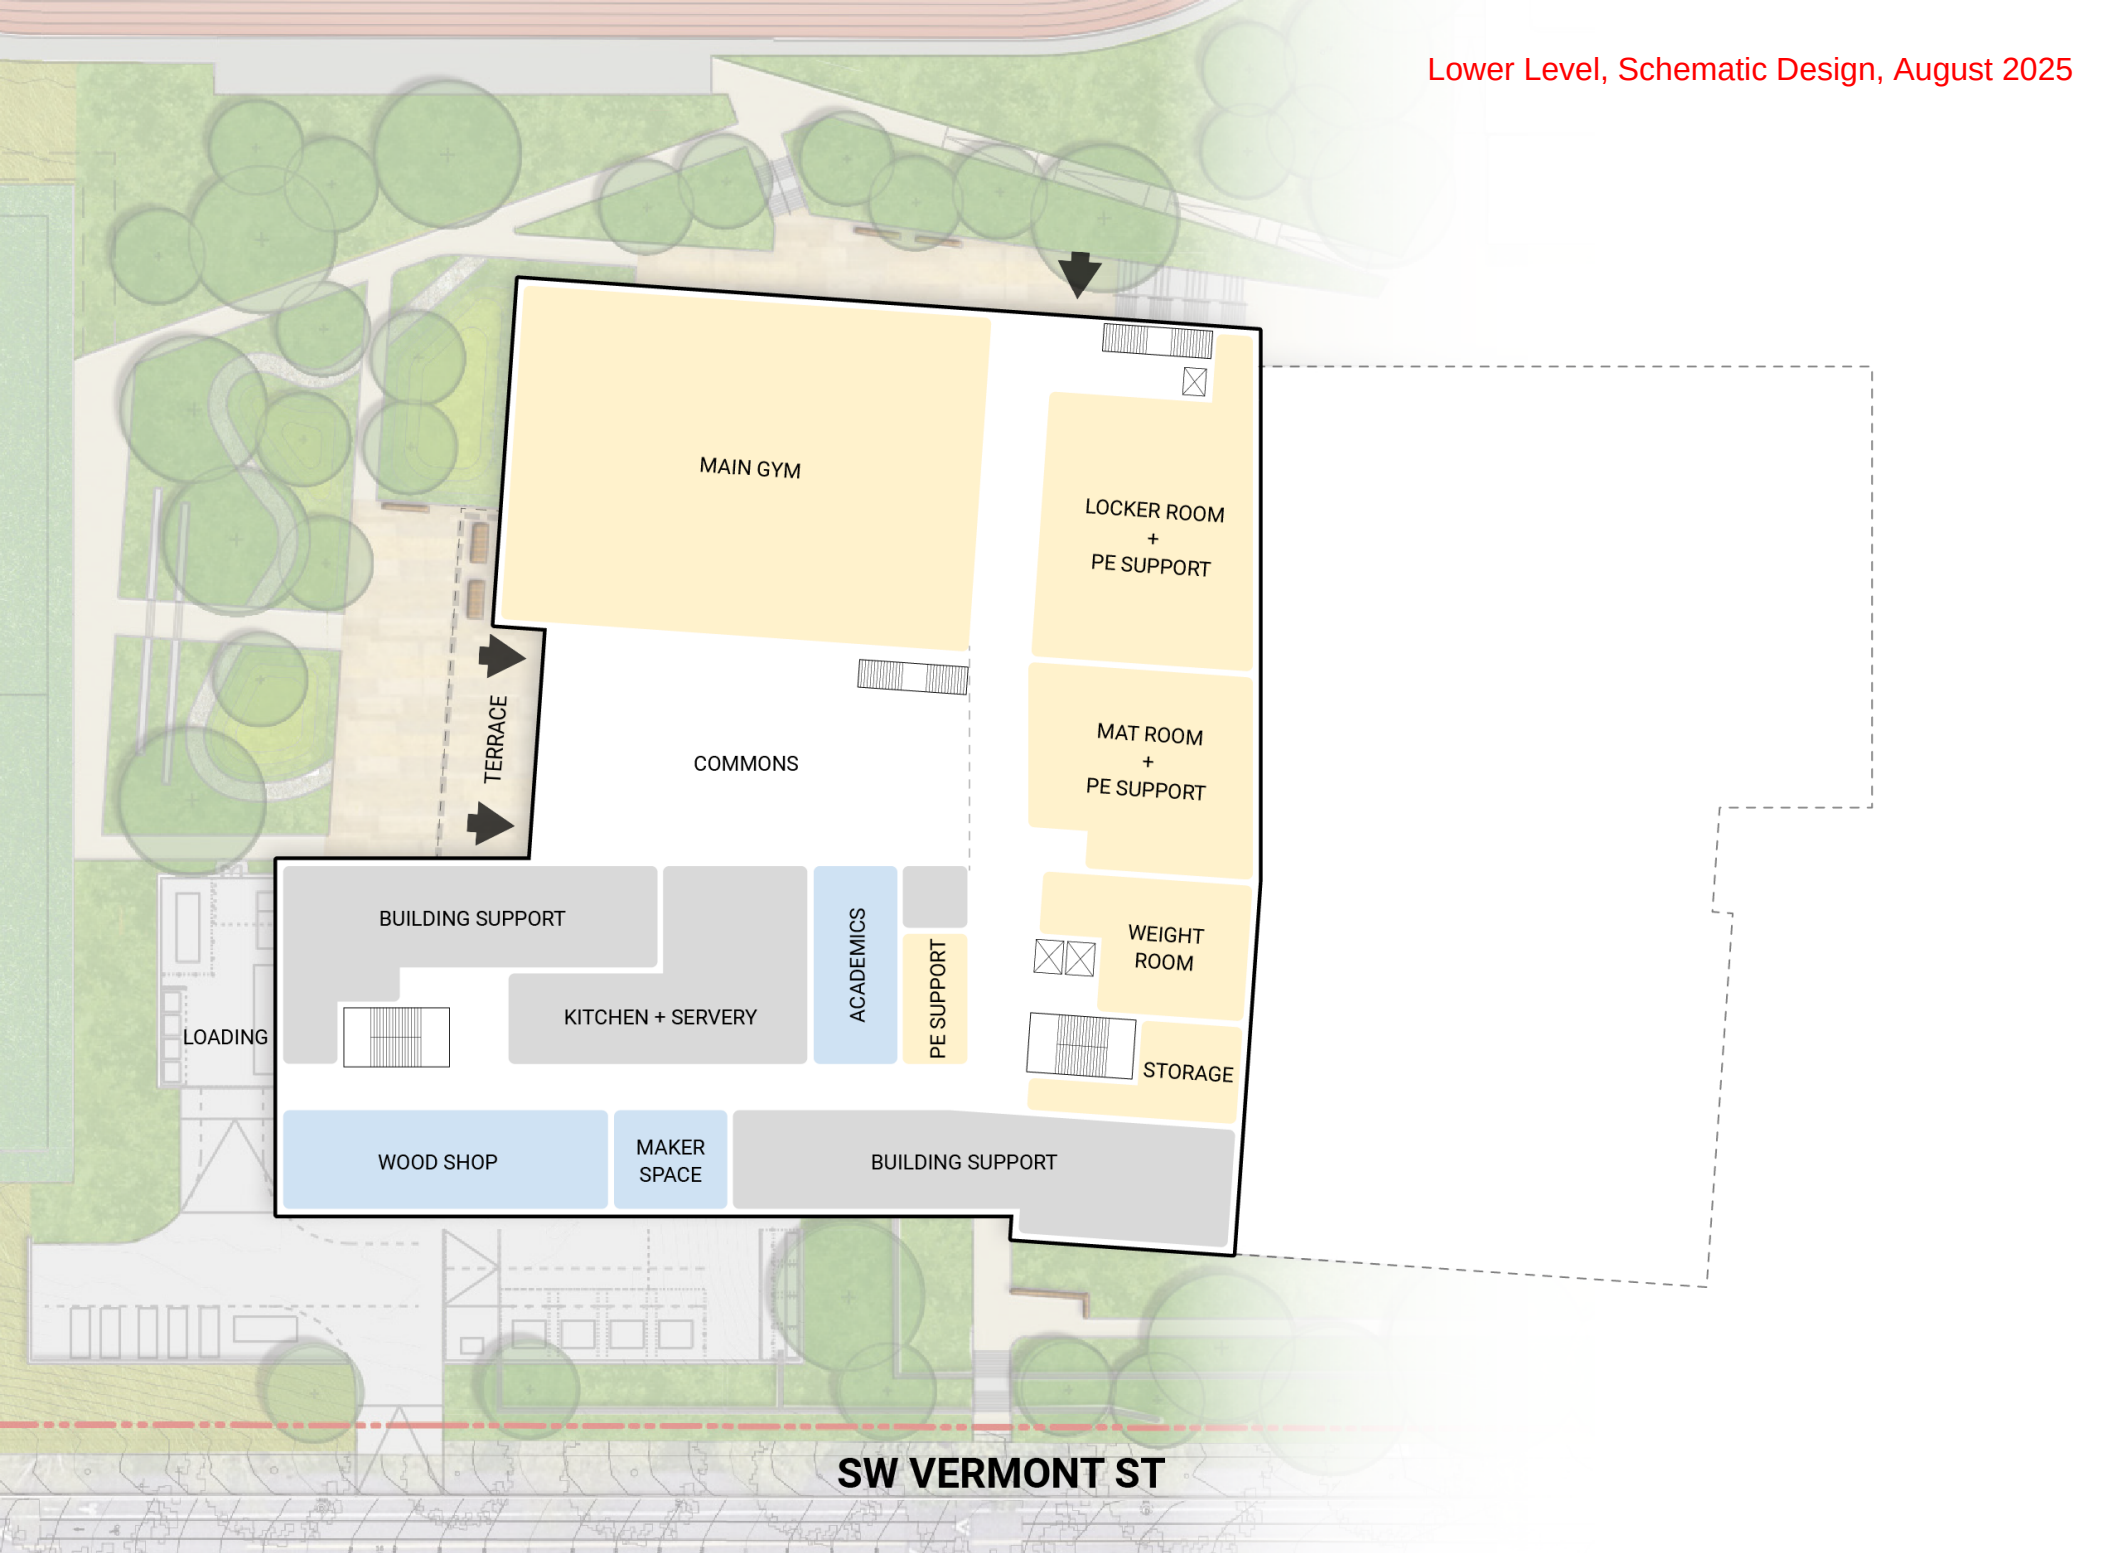

Level 1, Cost Reduction Study Phase

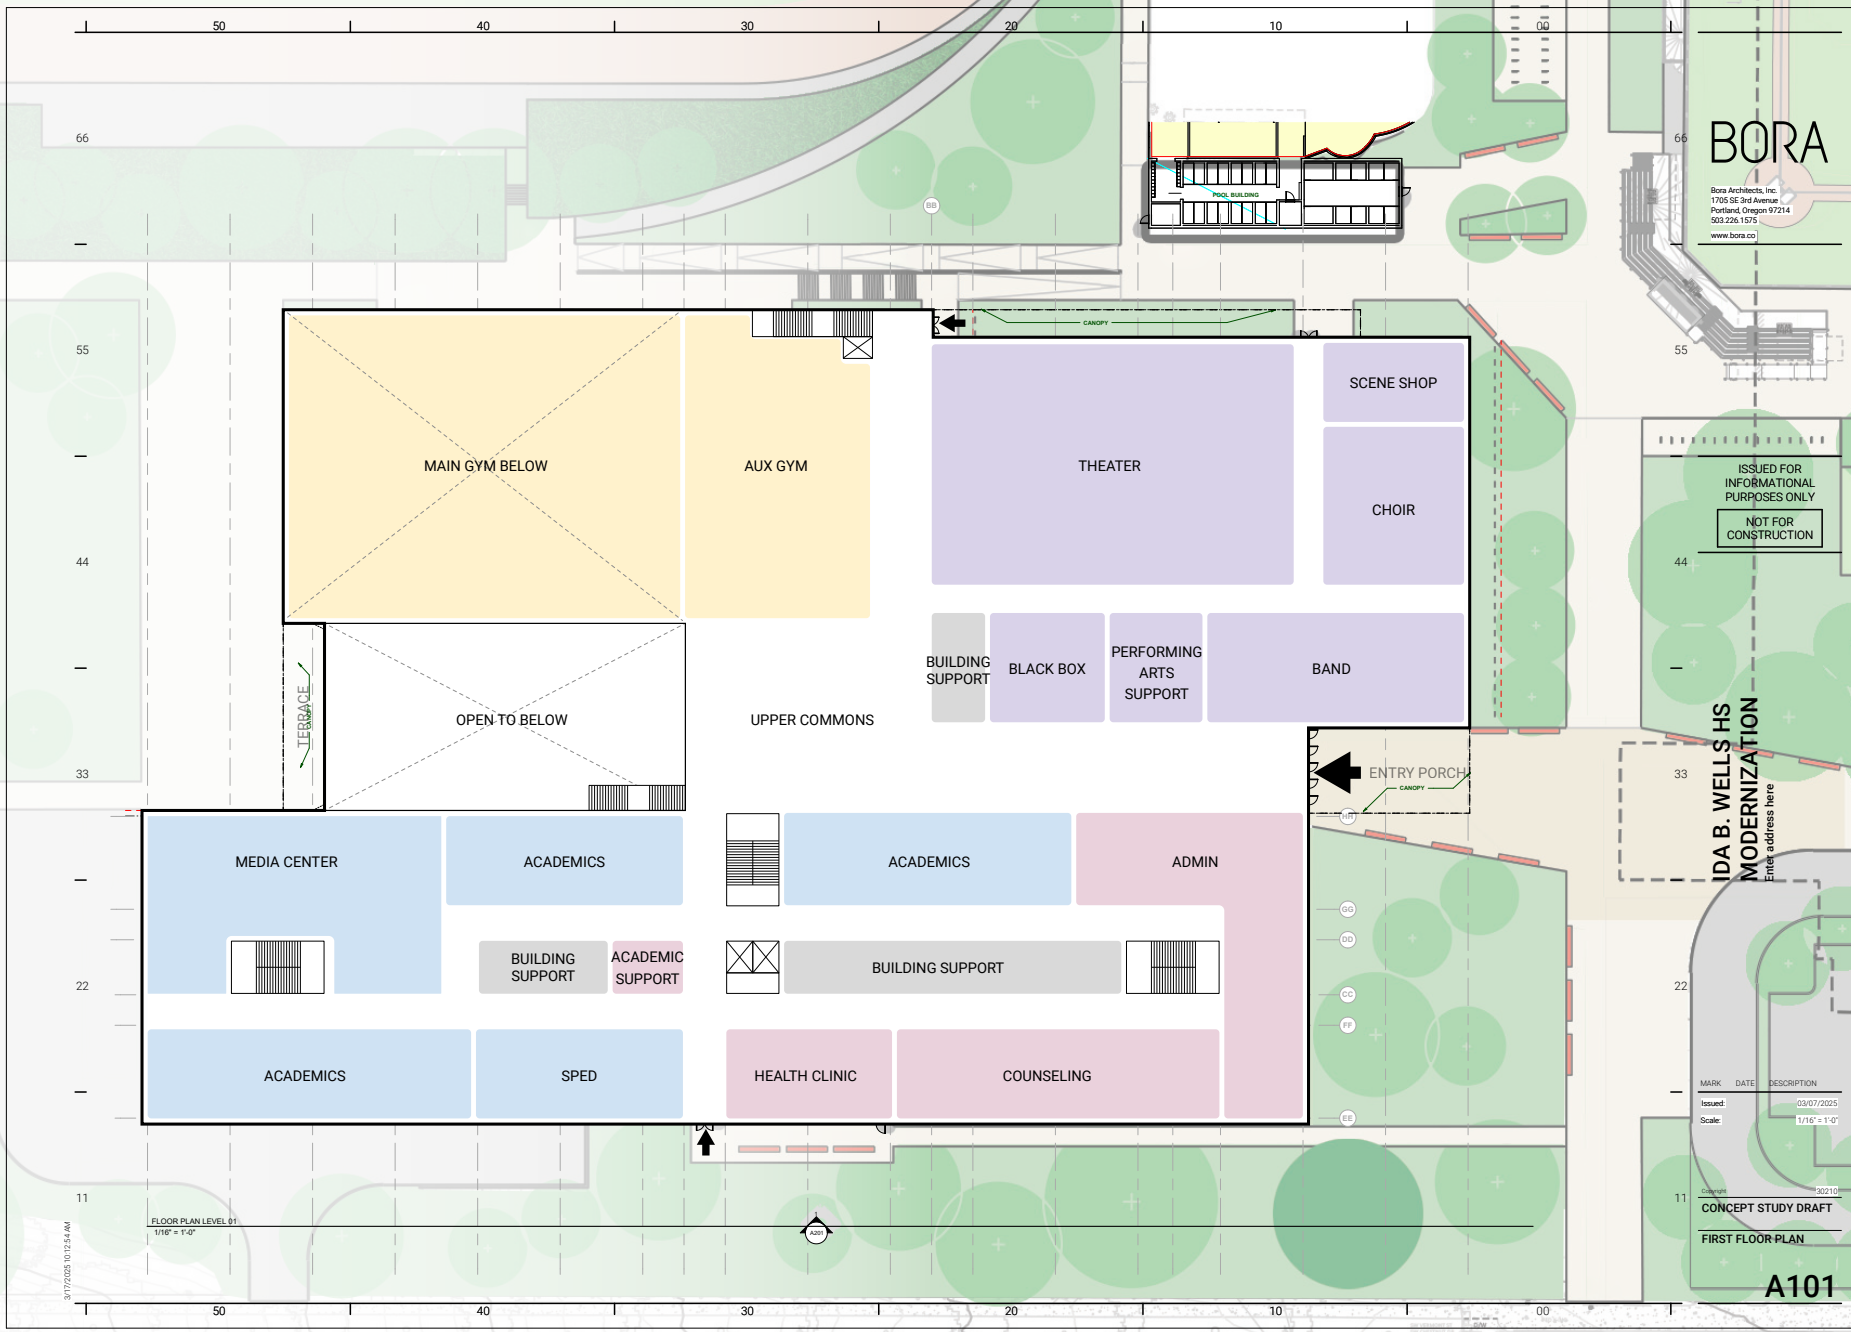

BORA

Bora Architects, Inc.
1705 SE 3rd Avenue
Portland, Oregon 97214
503.226.1575
www.bora.co

ISSUED FOR INFORMATIONAL PURPOSES ONLY

NOT FOR CONSTRUCTION

IDA B. WELLS HS MODERNIZATION

Enter address here

MARK	DATE	DESCRIPTION
Issued:		03/07/2025
Scale:		1/16" = 1'-0"

Copyright 30210

CONCEPT STUDY DRAFT

FIRST FLOOR PLAN

A101

SW VERMONT ST

Level 1, Schematic Design, August 2025

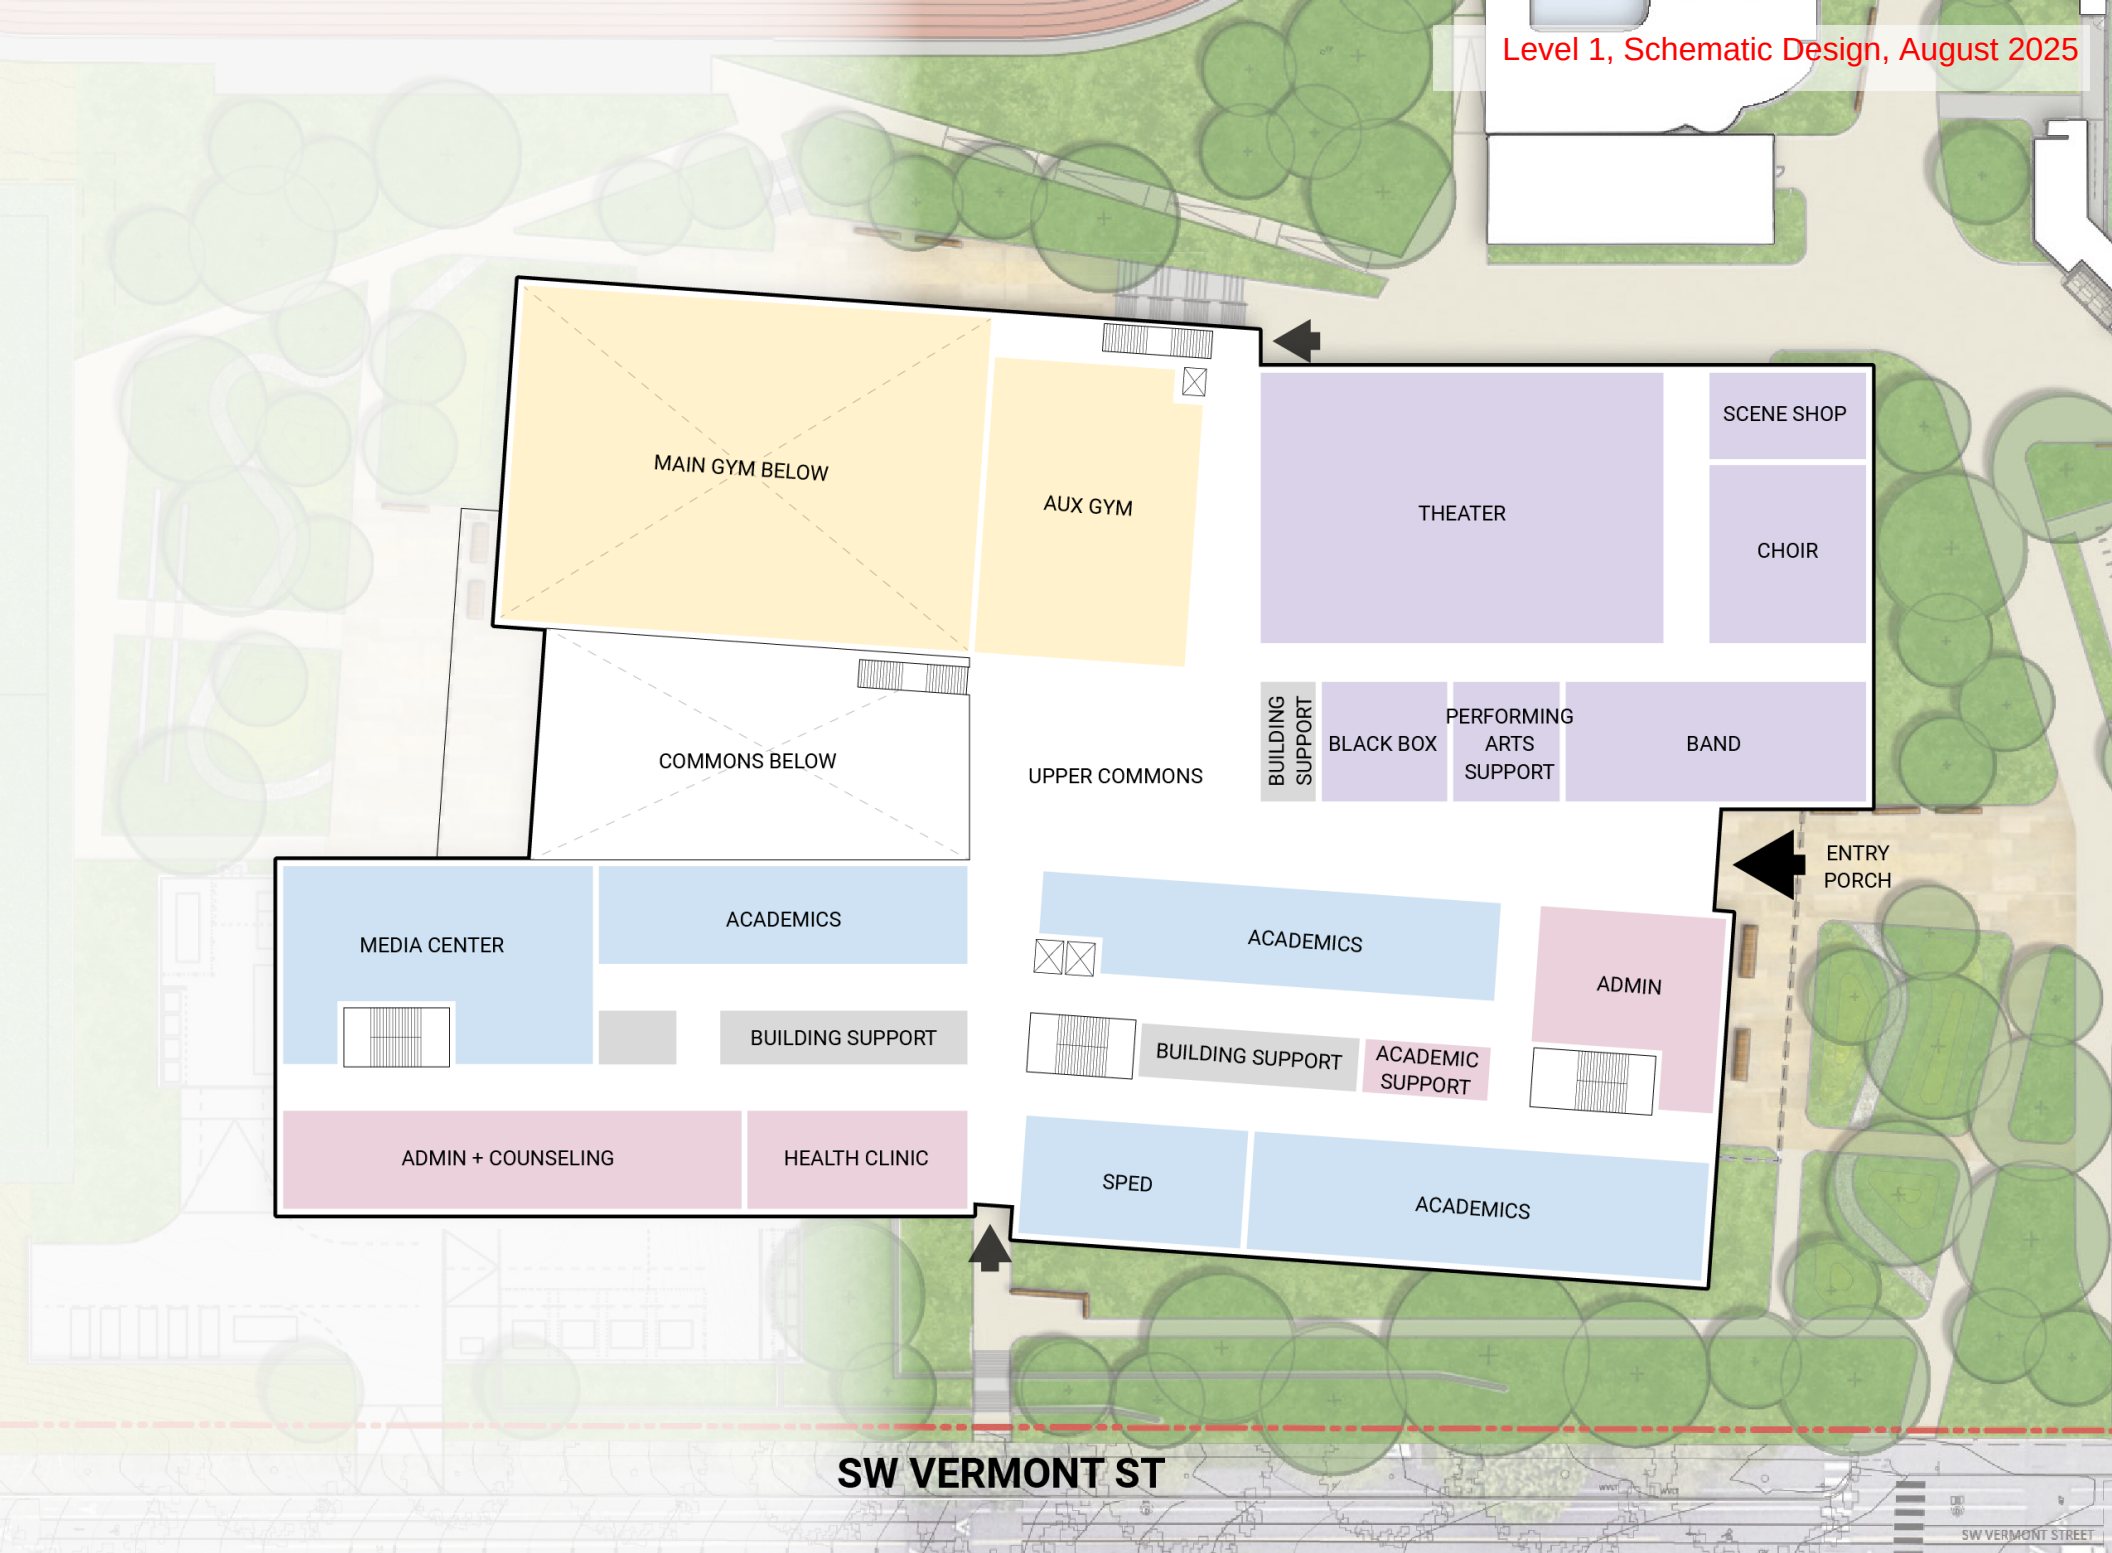

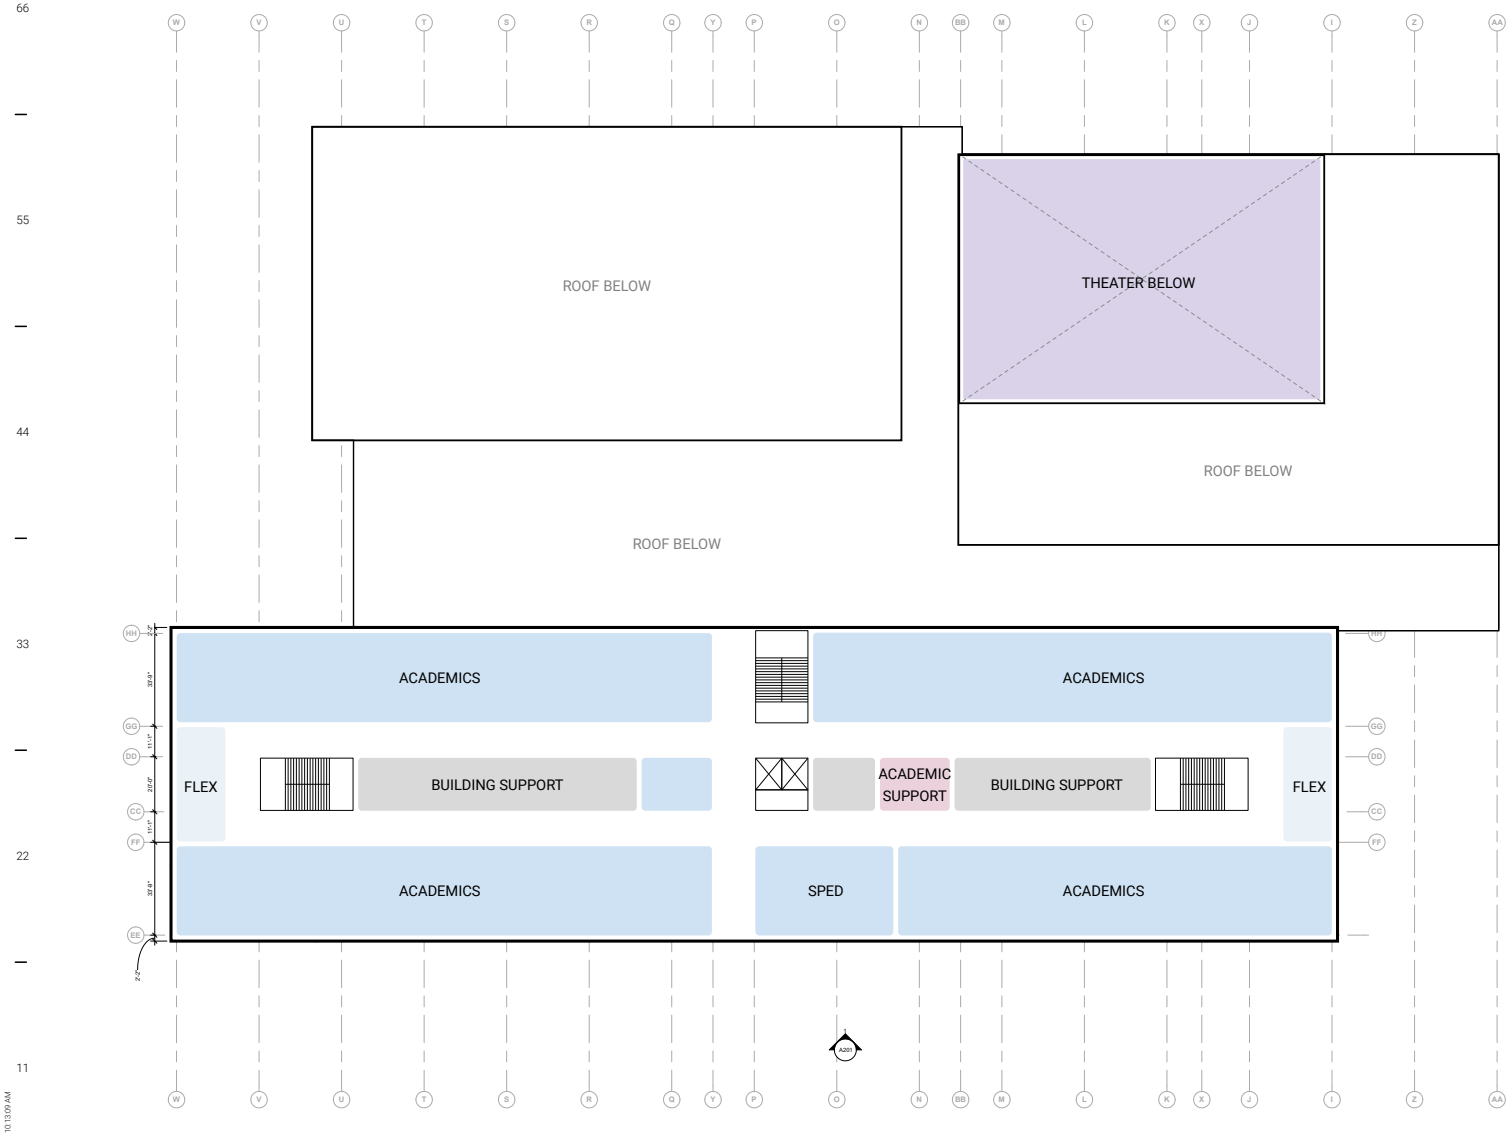

BORA
Bora Architects, Inc.
1705 SE 3rd Avenue
Portland, Oregon 97214
503.226.1575
www.bora.co

ISSUED FOR INFORMATIONAL PURPOSES ONLY

NOT FOR CONSTRUCTION

IDA B. WELLS HS MODERNIZATION
Enter address here

MARK	DATE	DESCRIPTION
Issued:		03/07/2025
Scale:		1/16" = 1'-0"

Copyright 30210

CONCEPT STUDY DRAFT

SECOND FLOOR PLAN

1 FLOOR PLAN LEVEL 02
1/16" = 1'-0"

3/7/2025 10:13:09 AM

A102

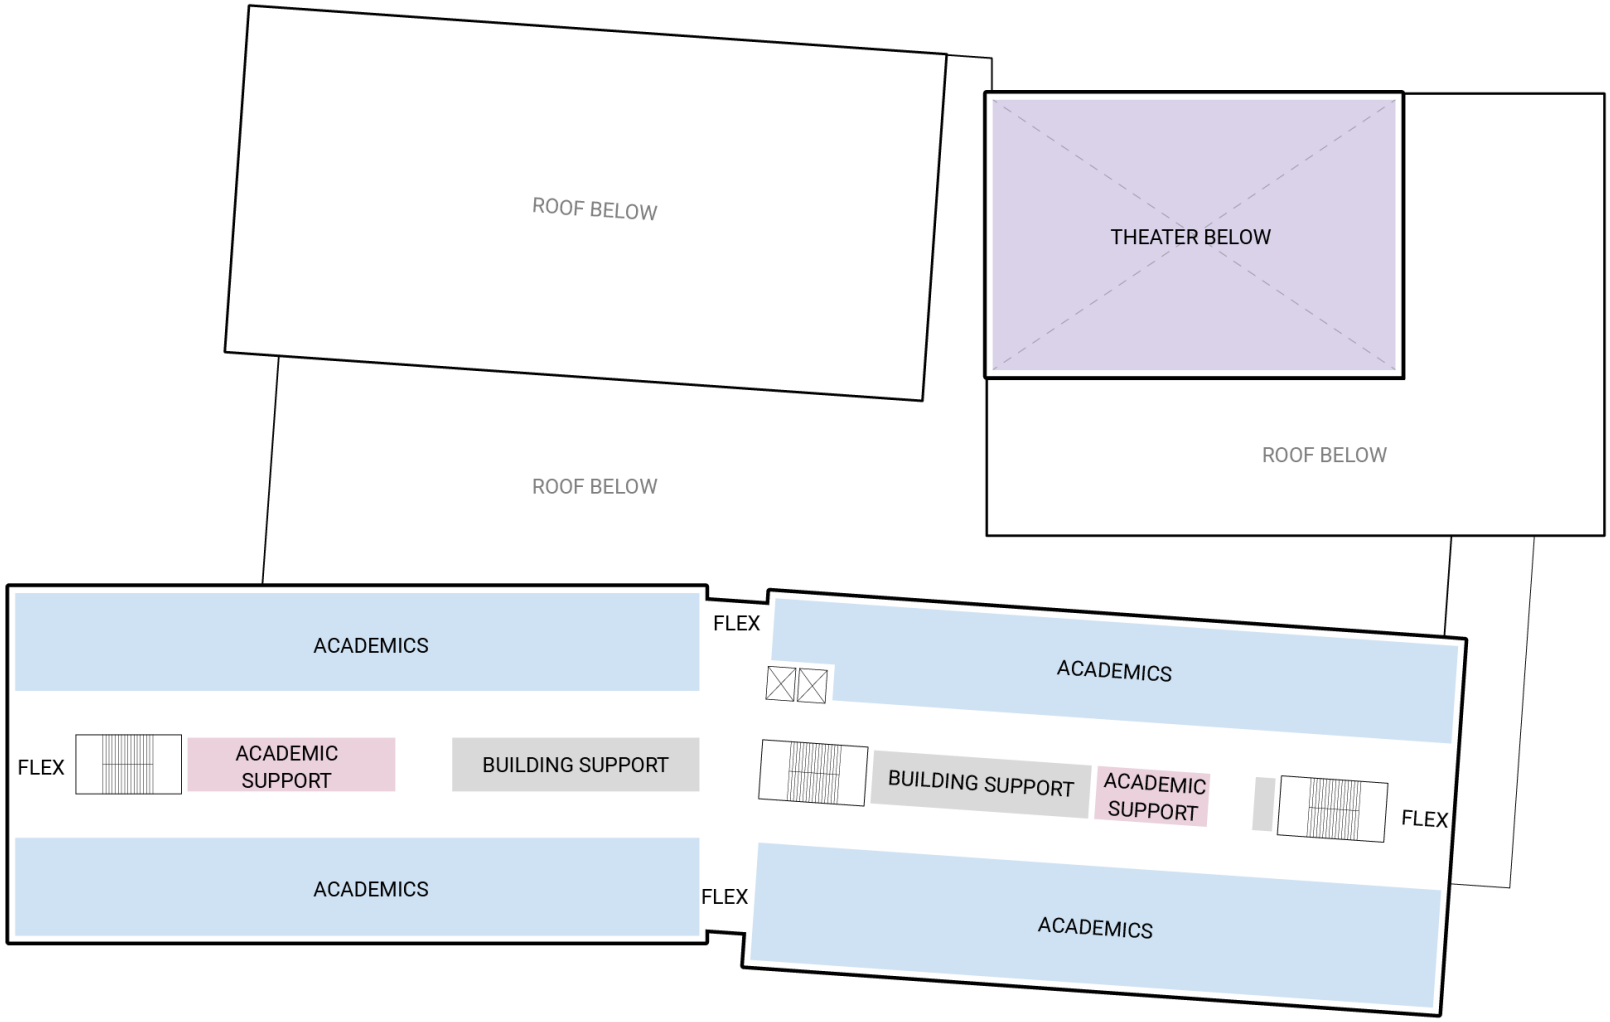
ROOF BELOW
THEATER BELOW
ROOF BELOW
ROOF BELOW
ACADEMICS
FLEX
ACADEMICS
FLEX
ACADEMIC SUPPORT
BUILDING SUPPORT
BUILDING SUPPORT
ACADEMIC SUPPORT
FLEX
ACADEMICS
FLEX
ACADEMICS

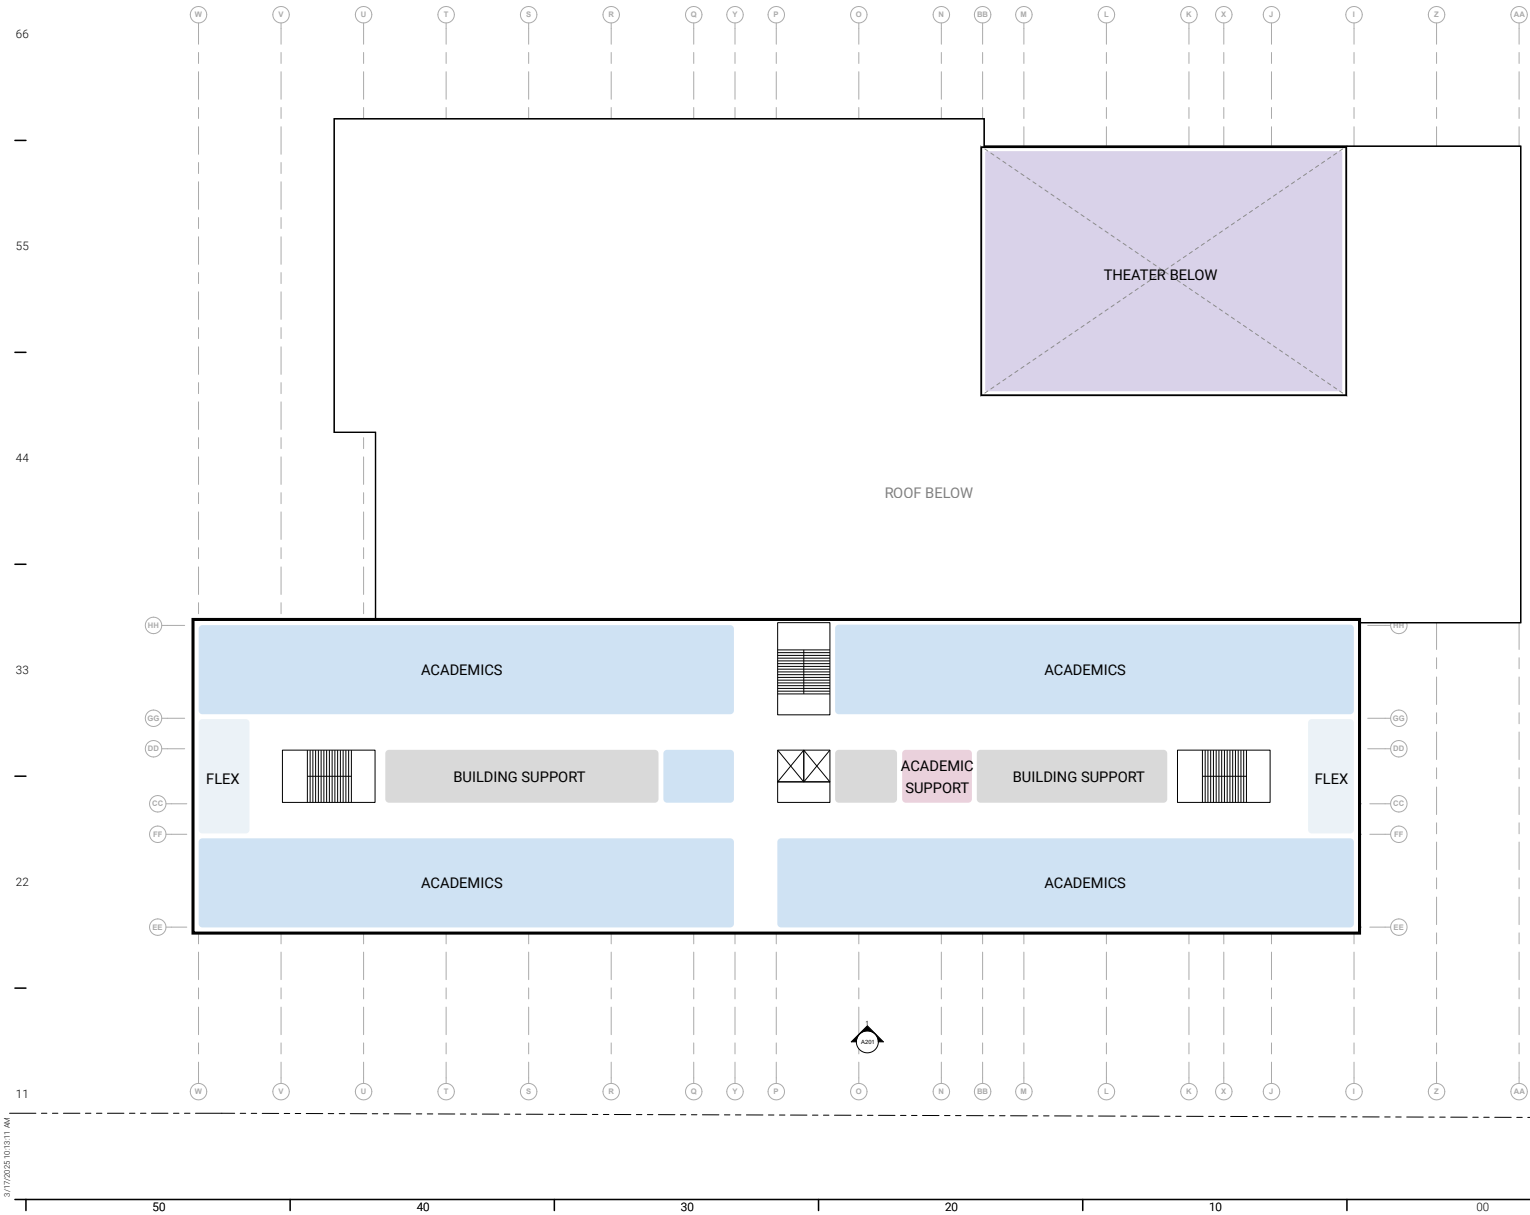

BORA
Bora Architects, Inc.
1705 SE 3rd Avenue
Portland, Oregon 97214
503.226.1575
www.bora.co

ISSUED FOR INFORMATIONAL PURPOSES ONLY

NOT FOR CONSTRUCTION

IDA B. WELLS HS MODERNIZATION
Enter address here

MARK	DATE	DESCRIPTION
Issued:		03/07/2025
Scale:		1/16" = 1'-0"

Copyright 30210

CONCEPT STUDY DRAFT

THIRD FLOOR PLAN

A103

3/17/2025 10:13:11 AM

1 FLOOR PLAN LEVEL 03
1/16" = 1'-0"

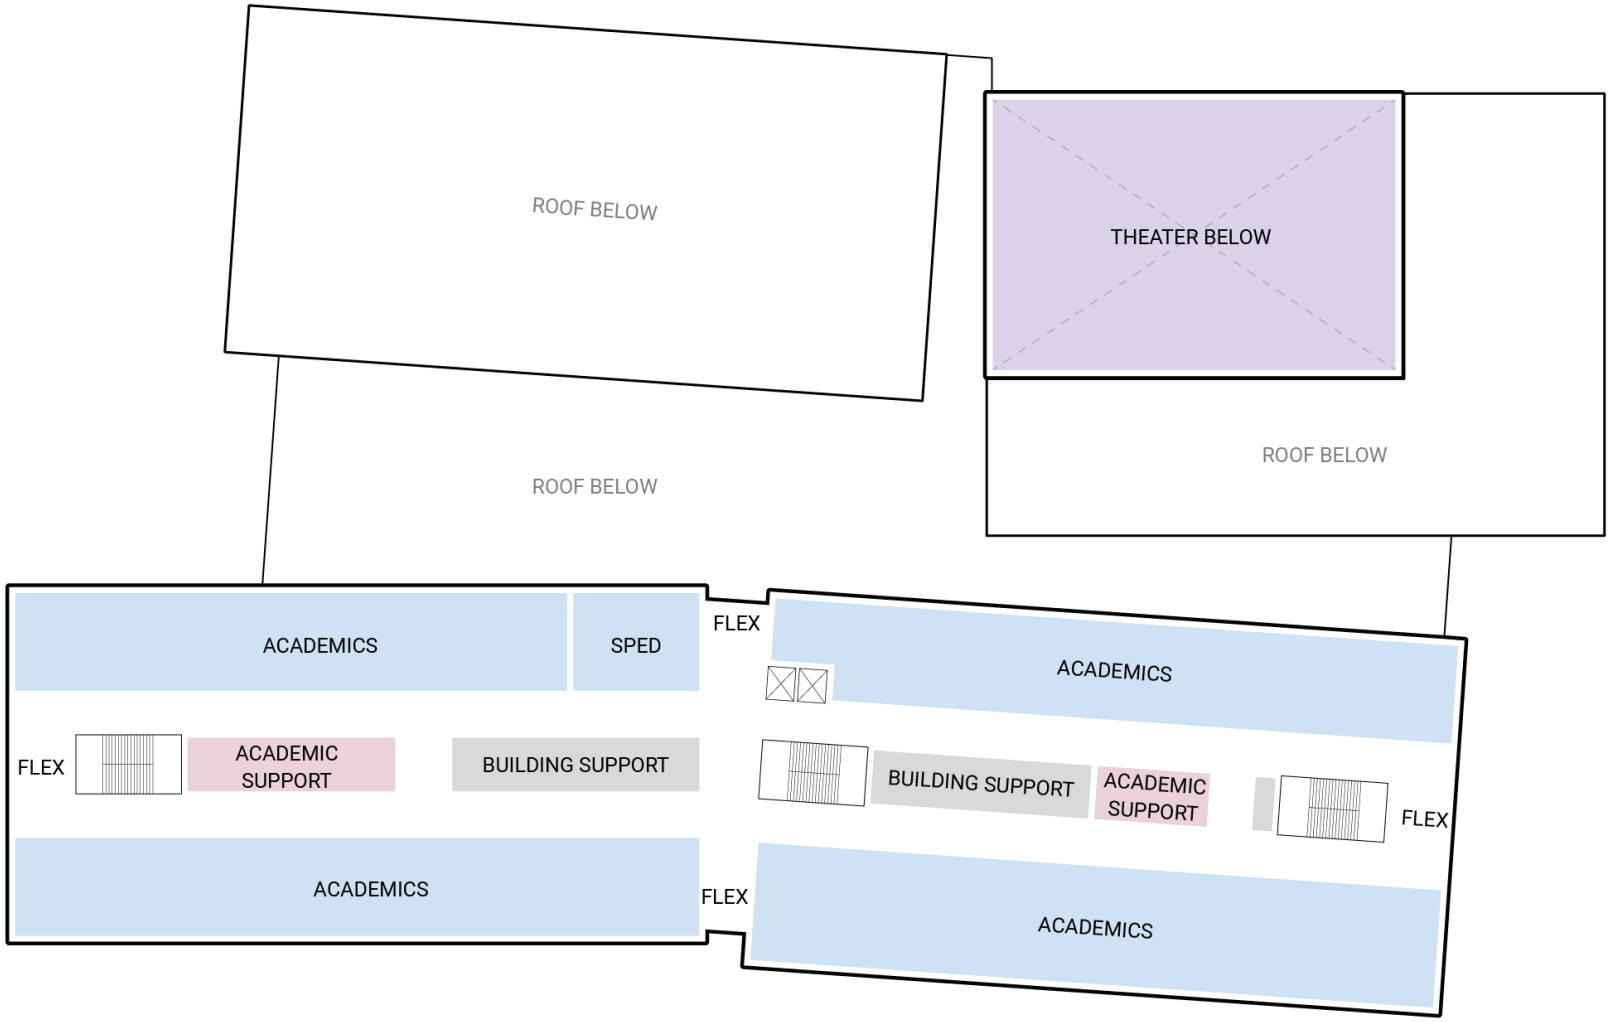
ROOF BELOW
THEATER BELOW
ROOF BELOW
ROOF BELOW
ACADEMICS
SPED
FLEX
ACADEMICS
FLEX
ACADEMIC SUPPORT
BUILDING SUPPORT
BUILDING SUPPORT
ACADEMIC SUPPORT
FLEX
ACADEMICS
FLEX
ACADEMICS

Level 4, Cost Reduction Study Phase
[no Level 4 in Schematic Design project]

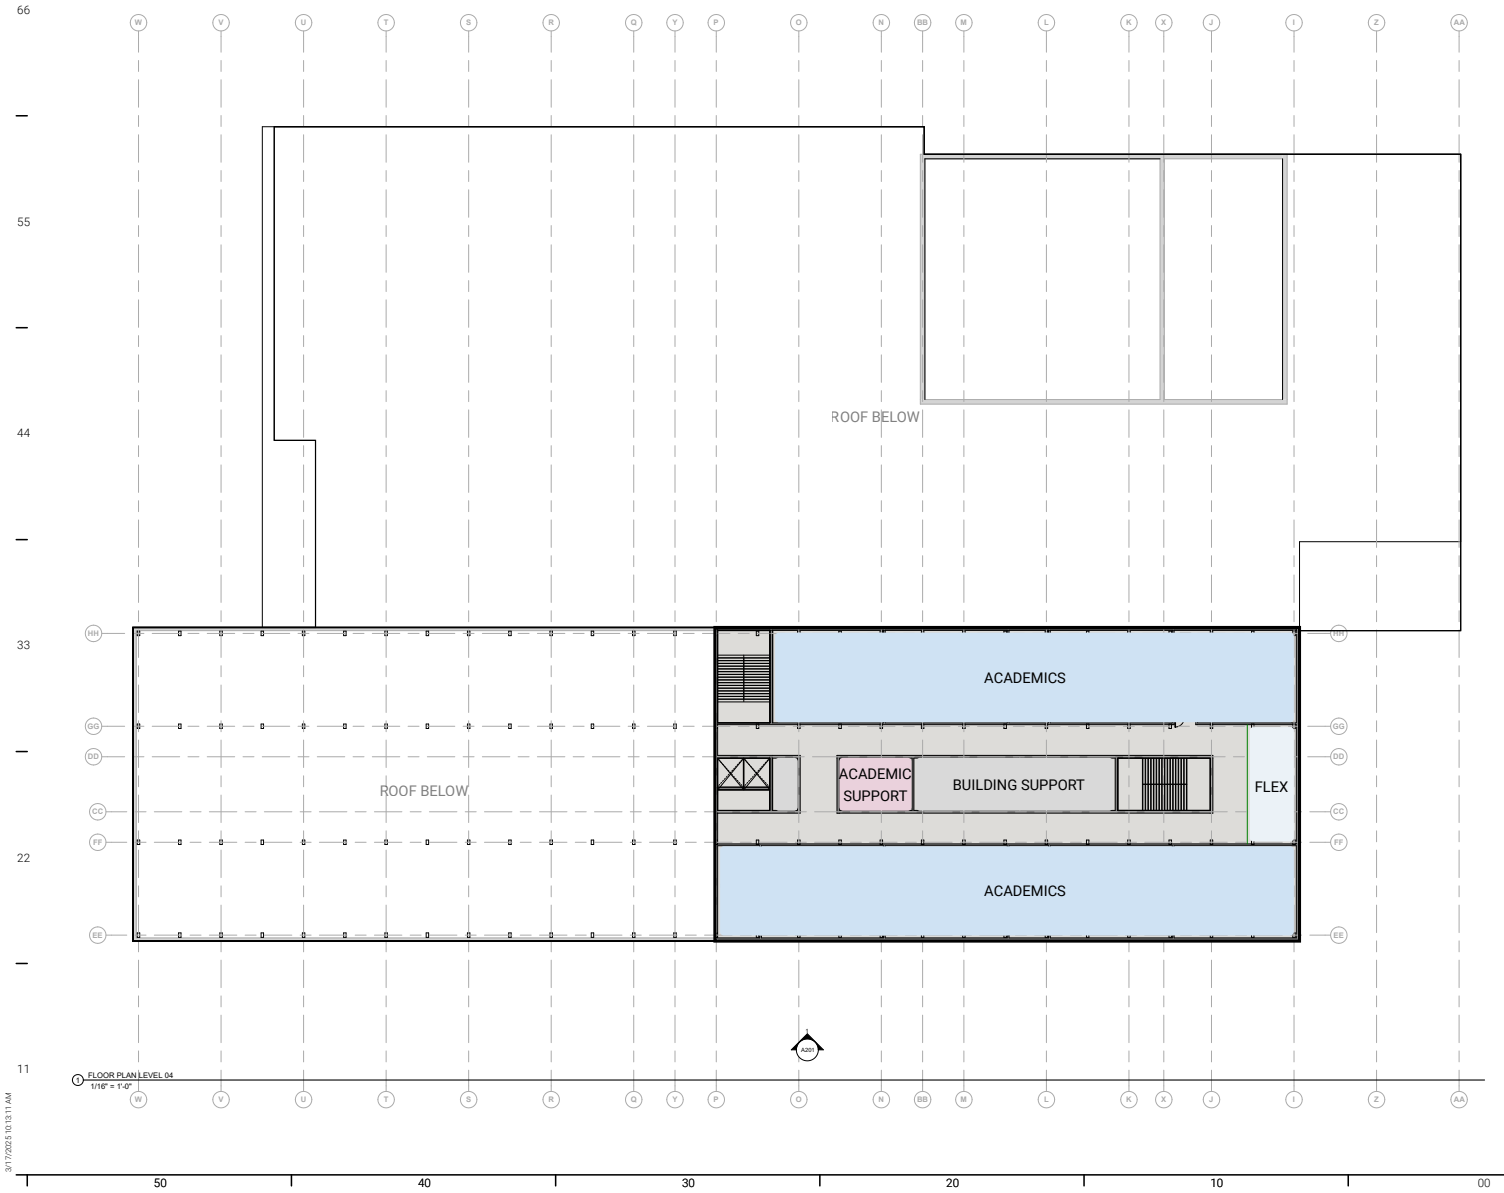

BORA
Bora Architects, Inc.
1705 SE 3rd Avenue
Portland, Oregon 97214
503.226.1575
www.bora.co

ISSUED FOR INFORMATIONAL PURPOSES ONLY

NOT FOR CONSTRUCTION

IDA B. WELLS HS MODERNIZATION
Enter address here

MARK	DATE	DESCRIPTION
Issued:		03/07/2025
Scale:		1/16" = 1'-0"

Copyright
30210

CONCEPT STUDY DRAFT

FOURTH FLOOR PLAN

A104

3/17/2025 10:13:11 AM

IBW Phase 2 Cost Reduction Study 2025 - Appendix 5: Cost Estimate
prepared by Hoffman Construction [CMGC]

HOFFMAN CONSTRUCTION COMPANY

BUILDING:	Ida B Wells High School Replacement	ESTIMATOR:	MT
LOCATION:	Portland, OR	CHECKED BY:	NI
ARCHITECT:	BORA	DATE:	4/15/2025
SUBJECT:	250411 Cost Study Estimate R2	DWG DATE:	3/07/2025

Description	Area	$/sf	Total
New Building Estimate	295,032	$931.56	$274,839,908
Site Work Estimate	950,000	$72.91	$69,269,245
Project Construction Estimate	**295,032**	**$1,166.35**	**$344,109,153**
Budget		TBD	
Owner Contingency			
Total Estimate Value			**$344,109,153**

Alternate Pricing (including markups): Cost Add / (Cost Deduct)

Alt 1	Path Connector and Retaining Wall from IBW to Rieke	$326,058
Alt 2	Grandstands - Seismic upgrade existing stadium in lieu of new	($173,447)
Alt 3	Delete Orchestra Pit	($1,056,278)
Alt 4	Track & Field Lighting - use existing field lighting	($972,732)

Allowance Pricing (incl. in estimate):

Wayfinding and Storytelling Scope	$500,000
Exterior Mockup	$200,000

NOTES

Excludes Cost Premiums due to Tariffs (unforeseen)
Excludes Contaminated Soil Costs (except as noted)
Excludes Permits (other than Trade Permits)
Excludes FF&E
Excludes Utility Connection Fees and Relocates (except as noted)

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	Qty	Unit	Unit Cost	Building	Site	Total	Cost/GSF	Building	Site	100% SD	Cost/GSF
	A10 - Foundations						**$6,234,288**	**$21.13**	**$6,028,151**	**$0**	**$6,028,151**	**$18.57**
	A1010 - Standard Foundations											
03 31 00	Concrete - Footings	295,032	gsf	$ 6.21	$1,832,149							
07 17 00	Waterproofing - Elevator Pits	3	ea	$ 10,000	$30,000							
31 23 00	Footing excavation and backfill	123,054	sf	$ 9.10	$1,119,791							
33 42 00	Storm Drainage Utility System - Perimeter Slab Drainage	1,590	lf	$ 50.00	$79,500							
31 62 00	Tension Piles @ Braced Frame Footings	80	ea	$ 7,500	$600,000							
	A1030 - Slab on Grade											
03 31 00	Concrete - SOG	123,054	sf	$ 17.18	$2,114,068							
07 21 00	Rigid Insulation @ Radiant Floor (Commons)	16,200	sf	$ 3.00	$48,600							
03 31 00	SOG Base course - 12"	4,558	cy	$ 90.00	$410,180							
	A20 - Basement Construction						**$3,409,094**	**$11.55**	**$4,262,183**	**$0**	**$4,262,183**	**$13.13**
	A2010 - Basement Excavation											
31 23 00	Mass excavation - Basement Excavation - Export	33,333	cy	$ 38.00	$1,266,667							
31 23 00	Mass excavation - Orchestra Pit Excavation - Export	381	cy	$ 50.00	$19,037							
31 41 00	Shoring - H Pile and Lagging - Basement East Side only	5,760	sf	$ 100.00	$576,000							
31 41 00	Shoring - H Pile and Lagging - Orchestra Pit	2,240	sf	$ 100.00	$224,000							
	A2020 - Basement Walls											
03 31 00	Concrete - Basement Walls	7,500	sf	$ 124.07	$930,525							
03 31 00	Concrete - Orchestra Pit Walls	2,016	sf	$ 124.07	$250,125							
07 17 00	Waterproofing - Below Grade Walls	7,500	sf	$ 12.00	$90,000							
07 17 00	Waterproofing - Orchestra Pit Walls	2,016	sf	$ 12.00	$24,192							
07 21 00	Rigid Insulation @ Below Grade Walls	7,500	sf	$ 3.00	$22,500							
07 21 00	Rigid Insulation @ Orchestra Pit Walls	2,016	sf	$ 3.00	$6,048							
	B10 - Superstructure					**$0**	**$28,331,781**	**$96.03**	**$34,155,779**	**$0**	**$34,155,779**	**$105.23**
	B1010 - Floor Construction	*Mass Timber Removed from estimate, all steel										
03 31 00	Concrete - SOMD	121,946	sf	$ 10.95	$1,335,309							
03 31 00	Concrete - Elevated Slab @ Orchestra Pit	755	sf	$ 99.34	$75,002							
03 31 00	Concrete - Misc	295,032	gsf	$ 1.09	$321,585							
05 12 00	Structural Steel - Level 01 Classroom - 12 psf	197	tons	$ 7,500	$1,475,100							
05 12 00	Structural Steel - Level 01 Commons - 14 psf	43	tons	$ 7,500	$325,500							
05 12 00	Structural Steel - Level 01 Gym - 14 psf	73	tons	$ 7,500	$545,423							
05 12 00	Structural Steel - Level 02 Classroom - 12 psf	263	tons	$ 7,500	$1,973,205							
05 12 00	Structural Steel - Level 03 Classroom - 12 psf	263	tons	$ 7,500	$1,973,205							
05 12 00	Structural Steel - Level 04 Classroom - 12 psf	145	tons	$ 7,500	$1,090,395							
05 12 00	Structural Steel - BRBF's (non classroom area)	16,586	sf	$ 10.00	$165,860							
05 12 00	Structural Steel - Side Plate Moment Framing (classroom) (7 psf	154,000	sf	$ 26.25	$4,042,500							
05 12 00	Theater Tiered Seating - Complete	3,100	sf	$ 75.00	$232,500							
05 12 00	Theater Catwalk System	3,250	sf	$ 60.00	$195,000							
05 12 00	Wind Girts @ Theater (allow)	10	tons	$ 7,500	$75,000							
05 12 00	Wind Girts @ Gym	22	tons	$ 7,500	$167,400							
05 31 00	Metal Deck + 10%	134,141	sf	$ 8.50	$1,140,195							
05 58 00	Misc Steel allow	295,032	gsf	$ 5.00	$1,475,160							
05 31 00	Spray Applied Fireproofing	121,946	sf	$ 8.00	$975,568							
07 84 00	Firestopping / Caulking allow	295,032	gsf	$ 1.00	$295,032							
07 95 00	Expansion Joints - Interior Walls	63	lf	$ 100.00	$6,250							

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	Qty	Unit	Unit Cost	Building	Site	Total	Cost/GSF	Building	Site	100% SD	Cost/GSF
07 95 00	Expansion Joints - Interior Floors	19	lf	$ 200.00	$3,750							
07 95 00	Expansion Joints - Interior Ceiling	138	lf	$ 100.00	$13,750							
	B1020 - Roof Construction	*Mass Timber Removed from estimate, all steel w/ some premium allow at Commons										
05 12 00	Canopy Framing - 15 psf	43	tons	$ 7,500	$320,625							
05 12 00	Structural Steel - BRBF's (non classroom area)	76,504	sf	$ 10.00	$765,040							
05 12 00	Structural Steel - Side Plate Moment Framing (classroom) (7 psf	48,340	sf	$ 26.25	$1,268,925							
05 12 00	Structural Steel - Level 02 Auditorium Roof - 18 psf	94	tons	$ 7,500	$703,688							
05 12 00	Structural Steel - Level 02 Performing Arts Roof - 12 psf	105	tons	$ 7,500	$784,530							
05 12 00	Structural Steel - Level 02 Gym Roof - 15 psf	188	tons	$ 7,500	$1,406,250							
05 12 00	Structural Steel - Level 04 Classroom Roof - 10 psf	121	tons	$ 7,500	$904,088							
05 12 00	Structural Steel - Level 05 Classroom Roof - 10 psf	121	tons	$ 7,500	$908,625							
05 31 00	Acoustical Roof Deck + 10% (arts wing)	30,645	sf	$ 15.00	$459,672							
05 31 00	Metal Roof Deck + 10%	80,641	sf	$ 7.50	$604,808							
06 17 00	Premium - Commons Roofs	23,674	sf	$ 82.68	$1,957,478							
06 17 00	Premium - Canopies	5,700	sf	$ 41.38	$235,866							
07 95 00	Roof Expansion Joint	365	lf	$ 300.00	$109,500							
	B20 - Exterior Enclosure						**$18,988,878**	**$64.36**	**$21,306,244**	**$0**	**$21,306,244**	**$65.64**
	B2010 - Exterior Walls											
	Exterior GFRC System - complete	88,773	sf	$ 150.68	$13,376,316							
07 95 00	Facade Expansion Joint	74.00	lf	$ 300.00	$22,200							
07 42 00	Allowance - Exterior Mockup	1.00	allow	$ 200,000	$200,000							
07 62 00	Parapet cap	3,055	lf	$ 30.00	$91,650							
05 12 00	Screenwall Support Steel - 10 psf	25.14	tons	$ 7,500	$188,550							
07 42 00	Screenwall x 12' - Perf Alum Corrugated panel	5,028	sf	$ 40.00	$201,120							
	B2020 - Exterior Windows											
	Exterior Windows - Avg Values	34,014	sf	$ 143.06	$4,866,043	adjusted +15% from prev.						
	B2030 - Exterior Doors											
	Exterior Door Allow	1	ls	$ 43,000	$43,000							
	B30 - Roofing						**$5,695,941**	**$19.31**	**$5,246,550**	**$0**	**$5,246,550**	**$16.16**
	B3010 - Roof Coverings											
07 52 00	R01 - 2 ply SBS modified bituminous roofing	124,843	sf	$ 37.00	$4,619,191							
07 52 00	R02 -Canopy Membrane Roof	5,700	sf	$ 37.00	$210,900							
07 52 00	Lower Exposed Roof Premium	23,674	sf	$ 25.00	$591,850							
07 52 00	Walk off pad allow	1	ls	$ 50,000	$50,000							
	B3020 - Roof Openings											
07 71 00	Roof Hatch	7.00	ea	$ 2,000	$14,000							
08 63 00	Skylights	1,400.00	sf	$ 150.00	$210,000							
	C10 - Interior Construction						**$13,459,360**	**$45.62**	**$14,825,486**	**$0**	**$14,825,486**	**$45.67**
	C1010 - Partitions	295,032	gsf	$ 32.31	$9,532,484							
	C1020 - Interior Doors	295,032	gsf	$ 8.26	$2,436,964							
	C1030 - Fittings	295,032	gsf	$ 5.05	$1,489,912							
	C20 - Stairs						**$594,000**	**$2.01**	**$1,158,000**	**$0**	**$1,158,000**	**$3.57**
	C2010 - Stair Construction											
05 51 00	Stairs - Public Stair Towers	8	flt	$ 50,000	$400,000							
05 51 00	Stairs - Public Open Stair - Premium	1.00	flt	$ 100,000	$100,000							
05 51 00	Stairs - Theater Stairs	1.00	ls	$ 94,000	$94,000							

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	Qty	Unit	Unit Cost	Building	Site	Total	Cost/GSF	Building	Site	100% SD	Cost/GSF
	C30 - Interior Finishes						**$14,314,345**	**$48.52**	**$15,766,051**	**$0**	**$15,766,051**	**$48.57**
	C3010 - Wall Finishes	295,032	gsf	$ 20.19	$5,955,711							
	C3020 - Floor Finishes	295,032	gsf	$ 10.90	$3,215,002							
	C3030 - Ceiling Finishes	295,032	gsf	$ 17.43	$5,143,632							
	D10 - Conveying						**$935,000**	**$3.17**	**$970,000**	**$0**	**$970,000**	**$2.99**
	D1010 - Elevator & Lifts											
14 21 00	Elevator - Passenger Elevator - 5 stop	1.00	ea	$ 285,000	$285,000							
14 21 00	Elevator - Service Elevator - 5 stop	1.00	ea	$ 335,000	$335,000							
14 21 00	Elevator - Passenger Elevator - 3 stop	1.00	ea	$ 215,000	$215,000							
14 21 00	Wheelchair Lift - ADA allow	1.00	ea	$ 50,000	$50,000							
14 21 00	Wheelchair Lift - Orchestra Pit	1.00	ea	$ 50,000	$50,000							
	D20 - Plumbing						**$7,469,991**	**$25.32**	**$8,543,570**	**$0**	**$8,543,570**	**$26.32**
	D2020 - Domestic Water Distribution											
32 84 00	Domestic Water Distribution	295,032	gsf	$ 4.51	$1,329,860							
32 84 00	Subtier Subcontractors	295,032	gsf	$ 4.11	$1,211,940							
32 84 00	Plumbing Fixtures	295,032	gsf	$ 3.67	$1,083,987							
	D2030 - Sanitary Waste											
32 84 00	Sanitary Waste	295,032	gsf	$ 5.41	$1,595,474							
	D2040 - Rain Water Drainage											
32 84 00	Rain Water Drainage System	295,032	gsf	$ 2.16	$636,810							
	D2090 - Other Plumbing Systems											
32 84 00	Plumbing System Equipment	295,032	gsf	$ 1.95	$575,075							
32 84 00	Misc. Materials & Methods	295,032	gsf	$ 1.54	$453,300							
32 84 00	BIM/CAD Plumbing	295,032	gsf	$ 0.79	$233,418							
32 84 00	BIM/CAD Piping	295,032	gsf	$ 1.19	$350,127							
	D30 - HVAC						**$26,616,184**	**$90.21**	**$29,670,303**	**$0**	**$29,670,303**	**$91.41**
	D3010 - Energy Supply											
32 84 00	Heating Systems & Equipment	295,032	gsf	$ 13.06	$3,853,315							
32 84 00	Cooling Systems & Equipment	295,032	gsf	$ 5.41	$1,596,995							
32 84 00	Terminal & Package Units	295,032	gsf	$ 35.59	$10,499,661							
32 84 00	System Test & Balance	295,032	gsf	$ 1.26	$370,992							
32 84 00	Misc. HVAC Systems	295,032	gsf	$ 1.91	$562,706							
32 84 00	Commissioning Support	295,032	gsf	$ 0.30	$88,433							
32 84 00	Indirects	295,032	gsf	$ 16.94	$4,998,010							
32 84 00	BIM/CAD Ductwork	295,032	gsf	$ 1.27	$374,139							
32 84 00	Subtier Subcontractors / Controls	295,032	gsf	$ 14.48	$4,271,932							
	D40 - Fire Protection						**$2,360,256**	**$8.00**	**$2,596,744**	**$0**	**$2,596,744**	**$8.00**
	D4010 - Sprinklers											
32 84 00	Fire Protection	295,032	gsf	$ 8.00	$2,360,256							
	D50 - Electrical	**295,032**	**gsf**	**$ 92.27**			**$27,999,236**	**$94.90**	**$29,950,000**	**$0**	**$29,950,000**	**$92.27**
	D5010 - Electrical Service & Distribution											
26 05 00	Seismic Engineering	295,032	gsf	$ 0.06	$18,158							
26 05 00	Shared Scaffold Cost	295,032	gsf	$ 0.11	$31,777							
26 05 00	Equipment Rental	295,032	gsf	$ 2.23	$658,243							
26 05 00	Mobilization	295,032	gsf	$ 0.25	$72,634							
26 05 00	BIM Coordination	295,032	gsf	$ 0.69	$204,282							

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	**Qty**	**Unit**	**Unit Cost**	**Building**	**Site**	**Total**	**Cost/GSF**	**Building**	**Site**	**100% SD**	**Cost/GSF**
26 05 00	Clean up	295,032	gsf	$ 1.00	$295,075							
26 05 00	Firestop conduits	295,032	gsf	$ 0.62	$181,584							
26 05 00	Safe off existing bldg for demo	295,032	gsf	$ 0.15	$45,396							
26 23 00	Electrical Testing	295,032	gsf	$ 0.17	$49,936							
26 23 00	Normal Power Equipment and feeders	295,032	gsf	$ 6.92	$2,042,825							
26 23 00	Install Gear and Panels	295,032	gsf	$ 6.86	$2,024,666							
26 32 00	Emergency Power Distribution and Feeders	295,032	gsf	$ 1.77	$522,055							
	D5020 - Lighting and Branch Wiring											
26 09 00	Site and Bldg Lighting controls	295,032	gsf	$ 3.11	$917,001							
26 27 00	Trim Devices/ Mech Connects	295,032	gsf	$ 4.77	$1,407,279							
26 27 00	Branch Power, equipment and Devices	295,032	gsf	$ 23.77	$7,013,698							
26 51 00	Lighting Fixtures and branch	295,032	gsf	$ 5.85	$1,725,052							
26 51 00	Site and Bldg Light Fixtures	295,032	gsf	$ 9.39	$2,769,162							
	D5030 - Communications & Security											
27 15 00	A/V and Stage Roughin	295,032	gsf	$ 2.00	$590,149							
27 15 00	Telephone/ Data raceways, Cabling & Equipment	295,032	gsf	$ 3.00	$885,224							
27 51 00	Intercom/ Paging raceways, Cabling & Equipment	295,032	gsf	$ 0.40	$118,030							
27 53 00	DAS Radio Antenna System raceways, Cabling 800mz only	295,032	gsf	$ 1.00	$295,075							
28 11 00	Security - Access Control Equipment, raceways, and cabling	295,032	gsf	$ 2.00	$590,149							
28 21 00	CCTV System raceways, Cabling & Equipment	295,032	gsf	$ 0.77	$226,981							
28 31 00	Security - Intrusion Detection, inc'd raceways and cabling	295,032	gsf	$ 0.31	$90,792							
28 46 00	Fire Alarm & ARA, raceways and cabling	295,032	gsf	$ 1.74	$512,976							
	D5090 - Other Electrical Systems											
26 05 00	Preconstruction (moved to below the line)				$0							
26 05 00	Overhead / GC's/ Fee	295,032	gsf	$ 10.46	$3,086,935							
26 05 00	Permits / Fees & related fees	295,032	gsf	$ 0.37	$108,951							
26 05 00	Temporary Power and Lighting	295,032	gsf	$ 2.00	$590,149							
26 31 00	Photovoltaic Power	1	ls	$ 925,000	$925,000							
	E10 - Equipment						**$7,698,000**	**$26.09**	**$7,698,000**	**$30,000**	**$7,728,000**	**$23.81**
	E1010 - Commercial Equipment											
11 30 13	Residential Appliances - OFCI	1.00	allow	$ 25,000	$25,000							
32 84 00	Food Service Equipment - JBK Budget	1.00	ls	$ 1,300,000	$1,300,000							
11 30 13	Library Shelving / Misc	1.00	ls	$ 150,000	$150,000							
	E1020 - Institutional Equipment											
12 32 00	IN85 - Fume Hoods	4.00	ea	$ 10,000	$40,000							
12 32 00	Misc Lab Equipment allow	1.00	ls	$ 50,000	$50,000							
12 32 00	Athletic Equipment	1.00	ls	$ 350,000	$350,000							
	E1021 - Theatrical Equipment											
32 84 00	Theater Variable Acoustics	1.00	ls	$ 75,000	$75,000							
32 84 00	AV Systems - Theater Rigging System	1.00	ls	$ 850,000	$850,000							
32 84 00	Theater Stage Draperies	1.00	ls	$ 90,000	$90,000							
32 84 00	Theater Orchestra Shell	1.00	ls	$ 400,000	$400,000							
32 84 00	Theater Orchestra Pit Filler / Stage Extension Platforms	1.00	ls	$ 90,000	$90,000							
32 84 00	Theater Production Lighting Control	1.00	ls	$ 375,000	$375,000							
32 84 00	Theater Lighting Fixtures	1.00	ls	$ 350,000	$350,000							
32 84 00	Theater Fixed Seating	500.00	ea	$ 650	$325,000							

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	Qty	Unit	Unit Cost	Building	Site	Total	Cost/GSF	Building	Site	100% SD	Cost/GSF
32 84 00	Drama Classroom Stage Rigging	1.00	ls	$ 115,000	$115,000							
32 84 00	Drama Classroom Stage Draperies	1.00	ls	$ 20,000	$20,000							
32 84 00	Drama Classroom Production & Lighting Control	1.00	ls	$ 130,000	$130,000							
32 84 00	Band & Choir Classroom Variable Acoustics	2.00	ea	$ 15,000	$30,000							
32 84 00	CTE Journalism & Audio Engineering Stage Rigging	1.00	ls	$ 75,000	$75,000							
32 84 00	CTE Journalism & Audio Engineering Stage Draperies	1.00	ls	$ 35,000	$35,000							
32 84 00	CTE Journalism & Audio Engineering Production Lighting Control	1.00	ls	$ 15,000	$15,000							
32 84 00	CTE Journalism & Audio Engineering Production Lighting Fixtures	1.00	ls	$ 50,000	$50,000							
32 84 00	Theater House Lighting Fixtures EXCLUDED in Building lighting	-	ls	$ 150,000	$0							
32 84 00	Drama Classroom Telescopic Audience Platforms	85.00	ea	$ 1,200	$102,000							
	E1030 - Vehicular Equipment											
11 13 00	Loading Dock Equipment	1.00	ls	$ 60,000	$60,000							
	E1090 - Other Equipment											
32 84 00	AV Systems - Theater Production	1.00	ls	$ 665,000	$665,000							
32 84 00	AV Systems - Drama Classroom Production	1.00	ls	$ 210,000	$210,000							
32 84 00	AV Systems - Band & Choir Classroom	2.00	ea	$ 60,000	$120,000							
32 84 00	AV Systems - Standard Classrooms	41.00	ea	$ 8,000	$328,000							
32 84 00	AV Systems - Lab Classrooms	16.00	ea	$ 8,000	$128,000							
32 84 00	AV Systems - Standard Conference Rooms - Excluded	-	ea	$ 8,000	$0							
32 84 00	AV Systems - Video Conference Rooms	4.00	ea	$ 15,000	$60,000							
32 84 00	AV Systems - Lobby / Digital Signage	3.00	ea	$ 5,000	$15,000							
32 84 00	AV Systems - Student Center / Commons AV Systems	1.00	ls	$ 220,000	$220,000							
32 84 00	AV Systems - Main Gymnasium	1.00	ls	$ 265,000	$265,000							
32 84 00	AV Systems - Auxiliary Gymnasium	1.00	ls	$ 45,000	$45,000							
32 84 00	AV Systems - Dance Studios / Wrestling	2.00	ea	$ 35,000	$70,000							
32 84 00	AV Systems - Stadium	1.00	ls	$ 85,000		$85,000						
32 84 00	AV Systems - CTE Sound Engineering	1.00	ls	$ 60,000	$60,000							
32 84 00	AV Systems - CTE Journalism & Audio Engineering	1.00	ls	$ 175,000	$175,000							
32 84 00	AV Systems - CTE Journalism & Audio Engineering, Media Server	1.00	ls	$ 150,000	$150,000							
32 84 00	AV Systems - Main Gymnasium LED Wall Option Excluded	-	ls	$ 70,000	$0							
	E20 - Furnishings						**$3,390,669**	**$11.49**	**$4,202,537**	**$0**	**$4,202,537**	**$12.95**
	E2010 - Fixed Furnishings											
12 21 00	Window Blinds - Interior	295,032	gsf	$ 0.53	$154,987							
12 21 00	Window Blinds - Exterior	295,032	gsf	$ 0.94	$278,216							
12 32 00	Casework Allow	295,032	gsf	$ 10.02	$2,957,465							
	F20 - Selective Building Demolition						**$7,330,008**	**$24.84**	**$0**	**$7,330,008**	**$7,330,008**	**$22.58**
	F2010 - Building Elements Demolition											
02 41 13	Demo - Existing School	338,100	gsf	$ 11.68		$3,949,008						
	F2020 - Hazardous Components Abatement											
02 41 13	Demo - Existing School - Abatement	338,100	gsf	$ 10.00		$3,381,000						
	G10 - Site Preparation						**$5,584,490**	**$18.93**	**$0**	**$6,598,524**	**$6,598,524**	**$20.33**
	G1010 - Site Clearing											
31 11 00	Clear and Grub - 12" Strip	30,481	cy	$ 42.00		$1,280,222						
	G1020 - Site Demolition and Relocations											
	Misc Site Protections	1.00	ls	$ 10,000.00		$10,000						
	Site Demo	950,000	sf	$ 1.19		$1,130,535						

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	Qty	Unit	Unit Cost	Building	Site	Total	Cost/GSF	Building	Site	100% SD	Cost/GSF
	G1030 - Site Earthwork											
	Mass excavation - Level 1 Excavation/Fill	47,319	sf	$ 7.00		$331,233						
	Mass excavation - Site Excavation/Fill	1.00	ls	$ 2,000,000		$2,000,000						
31 23 00	Subgrade Finish	950,000	sf	$ 0.35		$332,500						
31 25 00	Erosion Control	1.00	ls	$ 500,000.00		$500,000						
	G20 - Site Improvements						**$20,887,174**	**$70.80**	**$0**	**$28,944,558**	**$28,944,558**	**$89.17**
	G2020 - Parking Lots											
32 11 00	Prep - AC Paving	62,877	sf	$ 3.00		$188,631						
32 11 00	Prep - AC Paving Patch	6,616	sf	$ 5.00		$33,080						
32 11 00	Prep - Concrete Paving	117,610	sf	$ 3.00		$352,830						
32 11 00	Prep - Concrete Curbs	7,430	lf	$ 5.00		$37,150						
32 11 00	Prep - Retaining Walls	1,838	lf	$ 10.00		$18,380						
	G2020 - Parking Lots											
32 12 00	AC Paving - Parking, Loading Dock	62,877	sf	$ 4.50		$282,947						
32 12 00	AC Paving - Patch Curb Cuts into (e) Parking	6,616	sf	$ 6.00		$39,696						
32 12 00	AC Paving - Patch for Utilities in Vermont St	1.00	ls	$ 5,000		$5,000						
32 17 00	Paving Specialties - Pavement Markings, TW, Signs	1	ls	$ 40,000		$40,000						
	G2030 - Pedestrian Paving											
32 13 00	Concrete Paving / Sidewalks	99,213	sf	$ 15.00		$1,488,195						
32 13 00	Concrete Paving - Specialty Finish	18,397	sf	$ 25.00		$459,925						
32 13 00	Stairs	384	lf-rsr	$ 120.00		$46,080						
32 13 00	Curbs	4,122	lf	$ 20.00		$82,440						
32 13 00	Curbs in Curb Cuts in (e) Parking	3,308	lf	$ 20.00		$66,160						
	G2040 - Site Development											
32 31 00	Fencing Allow (Athletic Field Fencing w/ Field Cost)	1	ls	$ 150,000		$150,000						
32 32 00	Retaining Walls w/ waterproofing	7,600	sf	$ 111.00		$843,600						
32 33 00	Site Furnishings - Bike Racks	80	ea	$ 500.00		$40,000						
32 33 00	Site Furnishings - Bollards	1	allow	$ 10,000		$10,000						
32 33 00	Site Furnishings - Seatwall	428	lf	$ 400.00		$171,200						
32 33 00	Site Furnishings - Play Equipment allow	1	ls	$ 30,000		$30,000						
32 33 00	Site Furnishings - Site Signage	1	ls	$ 100,000		$100,000						
32 33 00	Site Furnishings - Trash Enclosure - covered	1	ls	$ 100,000		$100,000						
32 31 00	Site Furnishings - Mechanical Yard Enclosure	1	ls	$ 100,000		$100,000						
32 33 00	Site Furnishings - Covered Bike Parking	5,056	sf	$ 75.00		$379,200						
32 33 00	Site Furnishings - Misc Furnishings	1	ls	$ 25,000		$25,000						
32 32 00	Handrails	400	lf	$ 200.00		$80,000						
32 32 00	Guardrails	180	lf	$ 500.00		$90,000						
	G2040 - Site Development											
32 18 00	Football Bleacher System	1	ls	$ 1,000,000		$1,000,000						
32 18 00	Site Bldg - Football Bathroom Building	1,400	sf	$ 500.00		$700,000						
32 18 00	Site Bldg - Pool Support Building	2,340	sf	$ 500.00		$1,170,000						
32 18 00	Athletic Surfacing - Baseball Field Complete	1	ls	$ 3,453,445		$3,453,445						
32 18 00	Athletic Surfacing - Football Field and Track Complete	1	ls	$ 3,727,924		$3,727,924						
32 18 00	Athletic Surfacing - Soccer Practice Field Complete	1	ls	$ 2,257,096		$2,257,096						
32 18 00	Athletic Surfacing - Softball Field Complete	1	ls	$ 1,372,096		$1,372,096						
32 18 00	Athletic Surfacing - Tennis Courts Complete	1	ls	$ 458,805		$458,805						

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	**Qty**	**Unit**	**Unit Cost**	**Building**	**Site**	**Total**	**Cost/GSF**	**Building**	**Site**	**100% SD**	**Cost/GSF**
	G2050 - Landscaping											
32 92 00	Landscaping - Grass	49,080	sf	$ 1.00		$49,080						
32 92 00	Landscaping - Planting Area	142,670	sf	$ 4.00		$570,680						
32 92 00	Landscaping - Trees	94	ea	$ 500.00		$47,000						
32 92 00	Landscaping - Irrigation	191,750	sf	$ 2.00		$383,500						
32 92 00	Landscaping - Planting Area in Curb Cuts @ (e) Parking	9,400	sf	$ 4.00		$37,600						
32 92 00	Landscaping - Tress in Curb Cuts @ (e) Parking	60	ea	$ 500.00		$30,000						
32 92 00	Landscaping - Irrigation Curb Cuts @ (e) Parking	9,400	sf	$ 3.00		$28,200						
32 92 00	Topsoil - 12" @ Planting Areas	5,284	cy	$ 50.00		$264,204						
32 92 00	Topsoil - 8" @ Grass	1,212	cy	$ 50.00		$60,623						
32 92 00	Topsoil - 12" @ Curb Cuts @ (e) Parking	348	cy	$ 50.00		$17,407						
	G30 - Site Mechanical Utilities						**$3,252,180**	**$11.02**	**$0**	**$2,871,147**	**$2,871,147**	**$8.85**
	G3010 - Water Supply											
33 14 00	Domestic Water Piping	2,009	lf	$ 130.00		$261,170						
33 14 00	Fire Protection Piping	232	lf	$ 130.00		$30,160						
33 14 00	Irrigation Piping	81	lf	$ 80.00		$6,480						
33 14 00	Connections	2	ea	$ 3,500.00		$7,000						
33 14 00	Vaults and Backflows	1	ls	$ 50,000		$50,000						
33 14 00	Gas Piping	414	lf	$ 100.00		$41,400						
	G3020 - Sanitary Sewer											
33 31 00	Sanitary Sewer Piping	1,858	lf	$ 140.00		$260,120						
33 31 00	SS Manholes	10	ea	$ 10,000		$100,000						
33 31 00	Sanitary Sewer Utility System - Water Quality Catch Basin	1	ea	$ 10,000		$10,000						
33 31 00	Sanitary Sewer Utility System - Grease Interceptor	1	ea	$ 10,000		$10,000						
33 31 00	Sanitary Sewer Utility System - Connection to Building	4	ea	$ 2,000		$8,000						
33 31 00	Sanitary Sewer Utility System - Connection to Existing	1	ls	$ 100,000		$100,000						
	G3030 - Storm Sewer											
33 42 00	Storm Drainage Utility System - Catch Basin	10	ea	$ 1,500		$15,000						
33 42 00	Storm Drainage Utility System - Connection to Existing	3	ea	$ 2,500		$7,500						
33 42 00	Storm Drainage Utility System - Manhole	15	ea	$ 8,000		$120,000						
33 42 00	Storm Drainage Utility System - Piping	2,695	lf	$ 130.00		$350,350						
33 42 00	Storm Drainage Utility System - Treatment Vault	3	ea	$ 100,000		$300,000						
33 46 00	Stormwater Detention Basin - Underground	105,000	cf	$ 15.00		$1,575,000						
	G40 - Site Electrical Utilities						**$4,600,000**	**$15.59**	**$0**	**$4,600,000**	**$4,600,000**	**$14.17**
	G4010 - Electrical Distribution											
26 55 00	Street (ROW) PGE Infrastructure power	1	ls	$ 800,000		$800,000						
26 56 00	Site Power	1	ls	$ 1,100,000		$1,100,000						
	G4020 - Site Lighting											
26 55 00	Athletic Field power and lighting	1	ls	$ 850,000		$850,000						
26 55 00	Athletic Field power and lighting (additional)	1	ls	$ 600,000		$600,000						
26 55 00	Street (ROW) Lighting and power	1	ls	$ 250,000		$250,000						
26 56 00	Site Lighting	1	ls	$ 500,000		$500,000						
26 56 00	Site Lighting landscape	1	ls	$ 500,000		$500,000						
	Subtotal, Cost of Work				**$167,412,022**	**$41,738,852**	**$209,150,874**	**$708.91**	**$186,379,598**	**$50,374,237**	**$236,753,835**	**$729.39**
					$567.44	$43.94	$708.91		$574.19	$43.80	$729.39	

BUILDING: Ida B Wells High School Replacement
LOCATION: Portland, OR
ARCHITECT: BORA
SUBJECT: 250411 Cost Study Estimate R2

HOFFMAN CONSTRUCTION COMPANY

ESTIMATOR: MT
CHECKED BY: NI
DATE: 4/15/2025
DWG DATE: 3/07/2025

100% SD Estimate Rev3, 12/05/2024

				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	**Qty**	**Unit**	**Unit Cost**	**Building**	**Site**	**Total**	**Cost/GSF**	**Building**	**Site**	**100% SD**	**Cost/GSF**
MARK-UPS												
	Contingencies & Escalation											
12.50%	Design Contingency				$20,926,503	$5,217,356	$26,143,859	$88.61	$18,637,960	$5,037,424	$23,675,383	$72.94
5.00%	Construction Contingency				$8,370,601	$2,086,943	$10,457,544	$35.45	$9,318,980	$2,518,712	$11,837,692	$36.47
15.83%	Esc. to Midpoint of Construction (5% to May 2028)				$26,506,903	$6,608,652	$33,115,555	$112.24	$25,627,195	$6,926,458	$32,553,652	$100.29
	General Conditions, Requirements & Logistics											
	Pre-Construction Services				$765,514	$190,856	$956,370	$3.24	$752,883	$203,487	$956,370	$2.95
	Pre-Construction Services - Trade Partner Allow				$960,524	$239,476	$1,200,000	$4.07	$1,000,569	$270,431	$1,271,000	$3.92
	General Conditions, Requirements & Logistics				$34,418,775	$8,581,225	$43,000,000	$145.75	$34,679,931	$9,373,210	$44,053,141	$135.72
	Insurances											
1.107%	Subcontractor Default Insurance (SDI)				$2,471,001	$616,065	$3,087,067	$10.46	$2,656,399	$717,965	$3,374,364	$10.40
0.649%	Hoffman Bond				$1,776,500	$442,914	$2,219,414	$7.52	$1,894,966	$512,167	$2,407,133	$7.42
by owner	Builder's Risk Insurance				$0	$0	$0	$0.00	$0	$0	$0	$0.00
0.379%	Offsite GL and Professional Liability Insur				$1,037,432	$258,651	$1,296,083	$4.39	$1,106,614	$299,093	$1,405,707	$4.33
0.50%	DSIP Difference in Coverage requirements				$1,368,644	$341,228	$1,709,872	$5.80	$1,459,912	$394,582	$1,854,494	$5.71
	Taxes											
Excluded	City of Portland Clean Energy Tax - NIC				$0	$0	$0	$0.00	$0	$0	$0	$0.00
	Fees & Non Marked Up Costs											
2.90%	Contractor Fee, including CAT				$7,714,418	$1,923,344	$9,637,762	$32.67	$8,467,492	$2,288,574	$10,756,066	$33.14
TOTAL DIRECT CONSTRUCTION COST					**$273,728,839**	**$68,245,561**	**$341,974,400**	**$1,159.11**	**$291,982,499**	**$78,916,339**	**$370,898,837**	**$1,142.66**
1.50%	Allowance for Green Energy Technology				$4,105,933	$1,023,683	$5,129,616		$4,379,737	$1,183,745	$5,563,483	**$17.14**
	Credit for PV above the Line				($1,303,646)	$0	($1,303,646)					
	Credit for Mechanical Premium above the line				($1,691,217)	$0	($1,691,217)					
	Remaining GET Allow				**$1,111,069**	**$1,023,683**	**$2,134,753**					
TOTAL with Green Energy Technology					**$274,839,908**	**$69,269,245**	**$344,109,153**	**$1,166.35**	**$296,362,236**	**$80,100,084**	**$376,462,320**	**$1,159.80**

Alternate Pricing

Alt 1 - Path Connector and Retaining Wall from IBW to Rieke

32 11 00	Prep - Concrete Paving	5,071	sf	$ 3.00		$15,213
32 12 00	Concrete Pavement - 4"PCC; Sidewalks	5,071	sf	$ 13.00		$65,923
32 11 00	Prep - Retaining Walls	372	lf	$ 10.00		$3,720
32 32 00	Retaining Walls w/ waterproofing	1,289	sf	$ 111.00		$143,079
	Subtotal					$227,935
	Markups, Contingency and Escalation	43.05%	of	$227,935		$98,123
	Total					**$326,058**

BUILDING:	Ida B Wells High School Replacement					ESTIMATOR:	MT					
LOCATION:	Portland, OR					CHECKED BY:	NI					
ARCHITECT:	BORA					DATE:	4/15/2025					
SUBJECT:	250411 Cost Study Estimate R2					DWG DATE:	3/07/2025		100% SD Estimate Rev3, 12/05/2024			
				GSF	295,032	950,000	295,032		324,593	1,150,000	324,593	
	Description	Qty	Unit	Unit Cost	Building	Site	Total	Cost/GSF	Building	Site	100% SD	Cost/GSF
Alt 2 - Grandstands - Seismic upgrade existing stadium												
32 18 00	Football Bleacher System - delete from base scope	(1)	ls	$ 1,000,000			($1,000,000)					
02 41 13	Demo - Track Bleachers - delete from base scope	(10,000)	sf	$ 10.00			($100,000)					
02 41 13	Seismic / Structural Upgrades	10,000	sf	$ 30.00			$300,000					
	Waterproofing, steps and risers	15,000	sf	$ 10.00			$150,000					
	Replace Bleacher Seats	2,000	ea	$ 100			$200,000					
	Replace Guardrail Fencing with New 6'-0" on 3 sides	350	lf	$ 225			$78,750					
	Replace ADA Ramp	1	ea	$ 25,000			$25,000					
	Resurface Asphalt	10,000	sf	$ 4			$40,000					
	Replace Pressbox	1	ls	$ 185,000			$185,000					
	Subtotal						($121,250)					
	Markups, Contingency and Escalation	43.05%	of	-$121,250			($52,197)					
	Total						**($173,447)**					
Alt 3 - Delete Orchestra Pit												
31 23 00	Mass excavation - Orchestra Pit Excavation - Export	(381)	cy	$ 50.00			($19,037)					
31 41 00	Shoring - H Pile and Lagging - Orchestra Pit	(2,240)	sf	$ 100.00			($224,000)					
03 31 00	Concrete - Orchestra Pit Walls	(2,016)	sf	$ 124.07			($250,125)					
07 17 00	Waterproofing - Orchestra Pit Walls	(2,016)	sf	$ 12.00			($24,192)					
07 21 00	Rigid Insulation @ Orchestra Pit Walls	(2,016)	sf	$ 3.00			($6,048)					
03 31 00	Concrete - Elevated Slab @ Orchestra Pit	(755)	sf	$ 99.34			($75,002)					
14 21 00	Wheelchair Lift - Orchestra Pit	(1)	ea	$ 50,000.00			($50,000)					
32 84 00	Theater Orchestra Pit Filler / Stage Extension Platforms	(1.00)	ls	$ 90,000.00			($90,000)					
	Subtotal						($738,404)					
	Markups, Contingency and Escalation	43.05%	of	-$738,404			($317,874)					
	Total						**($1,056,278)**					
Alt 4 - Track & Field Lighting - use existing field lighting												
26 55 00	Athletic Field Power and Lighting - Football Field	1	ls	$ (680,000.00)			($680,000)					
	Subtotal						($680,000)					
	Markups, Contingency and Escalation	43.05%	of	-$680,000			($292,732)					
	Total						**($972,732)**					

MEMORANDUM

To:	Josh Brandt	Bora
CC:	Srini Goparaju	RLB
From:	Dan Junge	RLB
Date:	4/16/25	
Subject:	RLB review of HCC Cost Study Ph.2 Estimate for Ida B. Wells HS	
Reference:	PDX21594	

RLB REVIEW OF HCC COST STUDY PH.2 ESTIMATE FOR IDA B. WELLS HS

RLB has conducted a review of Hoffman Construction Company's Ida B. Wells Cost Study Phase 2 Estimate dated 4/11/25. It is in a conceptual cost model format that is based on elemental unit costs per square foot taken from the previous Schematic Design Rev. 3 estimate. The unit rates have then been applied to the new reduced building Gross Floor Area of 295, 032 SF. HCC has also adjusted floor plate and exterior envelope quantities to reflect the reduced building area. This is a common approach to cost modelling and one that RLB also employs. RLB agrees with the methodology.

The primary change from the SD Rev.3 Estimate is the use of an all-structural steel framing system in lieu of the previous mass timber system. This results in a significant (nearly $6M in direct costs) savings. HCC's rates for steel are reasonable for the current market. There is also a significant reduction in sitework scope, which aligns with RLB's understanding of the current design direction.

To follow are RLB's individual notes on HCC's estimate (these are shown on the cover page of RLB's markup of the HCC estimate).

(1) - No allowance for possible tariff impact may increase risk of cost overrun. A 1-3% allowance for tariffs and/or general market volatility is prudent.

(2) - 53% reduction in basement retaining wall qty. Verify.

(3) - Steel unit rate consistent with current market. Steel rates should be monitored closely to forecast tariff impact.

(4) - Unit rate for GFRC of $75/SF is consistent with market. Less expensive and lighter cladding type is VE opportunity.

(5) - Unit rates for curtainwall ($150/SF) and windows ($100/SF) are both lower than current market rates. A quote to verify would be helpful.

(6) - Unit rates for metal stud framing, both interior and exterior, are competitive.

(7) - Approx. $800K direct cost in the estimate for signage. VE opportunity.

(8) - Approx. $900K direct cost in the estimate for VP-1 Veneer Plaster. VE opportunity.

(9) - HCC plumbing @ $25.32/SF vs. RLB @ $23.81/SF (SD Rev.3). Price OK.

(10) - HCC HVAC @ $90.21/SF vs. RLB @ $88.72/SF (SD Rev.3). Price OK.

(11) - HCC Fire Protection @ $8.00/SF vs. RLB @ $6.84/SF (SD Rev.3). Price slightly high but within current market range.

(12) - HCC Electrical @ $91.77/SF vs. RLB @ $85.72/SF (SD Rev.3). 6.5% variance.

(13) - HCC site lighting cost is $2.7M vs. RLB $3.35M. This scope needs review in future estimates.

(14) - 12.5% is slightly high for design contingency at SD but given that this model contains no hedge for market volatility RLB it's probably OK.

In conclusion, RLB agrees with the methodology HCC used to create the estimate and takes no exception to the total construction cost beyond the specific items noted above. HCC's estimate of general conditions and general requirements is competitive in the current market. RLB believes a market volatility contingency of between 1-3% should be added to mitigate the potential impact of tariffs, immigration enforcement that may affect the subcontractor labor pool, and other political and macroeconomic factors.

Yours sincerely,

Dan Junge
Principal
Rider Levett Bucknall Ltd

Activity ID	Activity Name	Orig Dur	Remaining Duration	Start	Finish	Total Float	Predecessor Details	Successor Details
PRECONSTRUCTION		778	778	20-May-25	13-Jun-28	555		
Land Use		0	0	20-May-25	20-May-25	1333		
PREC1000	Bond Approved	0	0		20-May-25*	1333		
Design		298	298	15-Sep-25	13-Nov-26	955		
D1010	Design Development	126	126	15-Sep-25*	13-Mar-26	0	A1260: FS	D1040: FF
D1030	50% DD Check Set	0	0	23-Jan-26*		1163		
D1040	100% DD Issued	0	0		13-Mar-26*	0	D1010: FF	D1050: FS, D1060: FS, D1130: FS
D1050	100% DD Estimate	20	20	16-Mar-26	10-Apr-26	68	D1040: FS	D1060: FF
D1060	50% CD	88	88	16-Mar-26	17-Jul-26	0	D1040: FS, D1050: FF	D1070: FS, D1120: FS, PROC1080: FS, I
D1130	100% CD Early Work Permit	60	60	16-Mar-26	08-Jun-26	72	D1040: FS	PRE1050: FS
D1070	50% CD Estimate	20	20	20-Jul-26	14-Aug-26	69	D1060: FS	D1080: FS
D1120	100% CD	84	84	20-Jul-26	13-Nov-26	0	D1060: FS	PRE1020: FS, PROC1150: FS 20, PROC
D1140	Structural Frame 100% CD (Design Lock)	0	0	20-Jul-26		94	D1060: FS	PROC1100: FS
D1080	50% CD Reconciliation	20	20	17-Aug-26	14-Sep-26	69	D1070: FS	D1090: FS
D1090	GMP Submitted	0	0	15-Sep-26		69	D1080: FS	D1100: FS
D1100	GMP Review	20	20	15-Sep-26	12-Oct-26	69	D1090: FS	D1110: FS
D1110	GMP Approved	0	0		12-Oct-26	69	D1100: FS	SP1000: FS
Permit		159	159	03-Aug-26	19-Mar-27	0		
PRE1050	Early Site Prep Permit Submitted	5	5	03-Aug-26	07-Aug-26	34	D1060: FS 10, D1130: FS	PRE1040: FS
PRE1040	Early Site Prep Permit Review	80	80	10-Aug-26	02-Dec-26	34	PRE1050: FS	PRE1030: FS
PRE1020	Main Building Permit Submitted	5	5	16-Nov-26	20-Nov-26	0	D1120: FS	PRE1010: FS
PRE1010	Main Building Permit Review	80	80	23-Nov-26	18-Mar-27	0	PRE1020: FS	PRE1000: FS
PRE1030	Early Site Prep Permit	0	0		02-Dec-26	34	PRE1040: FS	SP1000: FS
PRE1000	Main Building Permit	0	0	19-Mar-27*		0	PRE1010: FS	BW1000: FS, BASE1120: FS 10
PROCUREMENT		532	532	11-May-26	13-Jun-28	555		
PROC1000	Trade Partner Selection	60	60	11-May-26	04-Aug-26	1027	D1060: SS 40	
Steel		200	200	20-Jul-26	30-Apr-27	54		
PROC1080	Steel Modeling RFP	20	20	20-Jul-26	14-Aug-26	54	D1060: FS	PROC1090: FS
PROC1090	Steel Modeling Executed	20	20	17-Aug-26	14-Sep-26	54	PROC1080: FS	PROC1100: FS
PROC1100	Steel Modeling	60	60	15-Sep-26	09-Dec-26	54	PROC1090: FS, D1140: FS	PROC1110: SS 40
PROC1110	Steel Detailing / Fabrication Drawings	90	90	10-Nov-26	19-Mar-27	54	PROC1100: SS 40	PROC1120: SS 60
PROC1120	Steel Fabrication	60	60	08-Feb-27	30-Apr-27	54	PROC1110: SS 60	BW1010: FS
Long Lead Equipment		400	400	16-Nov-26	13-Jun-28	70		
PROC1130	Switchgear	400	400	16-Nov-26	13-Jun-28	70	D1120: FS	BASE1110: FS
PROC1140	Generators	400	400	16-Nov-26	13-Jun-28	70	D1120: FS	BASE1110: FS
PROC1150	Air Handler Units	200	200	16-Dec-26	28-Sep-27	65	D1120: FS 20	BA1010: FS 15
CONSTRUCTION		944	944	03-Dec-26	20-Aug-30	0		
Phase 1		663	663	03-Dec-26	12-Jul-29	281		
Site Prep		95	95	03-Dec-26	16-Apr-27	39		
SP1000	Mobilize	10	10	03-Dec-26	16-Dec-26	34	PRE1030: FS, D1110: FS	SP1010: FF
SP1010	Tree Protection / Erosion Control	5	5	10-Dec-26	16-Dec-26	34	SP1000: FF	SP1020: FS, SP1060: FS
SP1020	Utility Relocation	30	30	17-Dec-26	29-Jan-27	34	SP1010: FS	SP1070: FS, SP1050: FS, SP1080: FS, S
SP1060	Temp Roads / Temp Retaining Walls	15	15	17-Dec-26	08-Jan-27	54	SP1010: FS	SP1030: FS
SP1030	Shoring	25	25	01-Feb-27	05-Mar-27	39	SP1020: FS, SP1060: FS	SP1040: FS
SP1050	Grandstand Demo	5	5	01-Feb-27	05-Feb-27	59	SP1020: FS	SP1040: FS
SP1070	Dewatering	10	10	01-Feb-27	12-Feb-27	54	SP1020: FS	SP1040: FS
SP1080	Temp Power & Water	30	30	01-Feb-27	12-Mar-27	34	SP1020: FS	SP1090: FS
SP1040	Mass Excavation & Fill to Subgrade	30	30	08-Mar-27	16-Apr-27	39	SP1030: FS, SP1050: FS, SP1070: FS	SP1090: SS
SP1090	Tower Crane	20	20	15-Mar-27	09-Apr-27	34	SP1040: SS, SP1080: FS	BW1000: FS
Basement		395	395	02-Apr-27	19-Oct-28	465		
BASE1010	Basement - SOG 1	35	35	30-Apr-27	18-Jun-27	0	BASE1140: FS	BASE1020: SS 10
BASE1020	Basement - SOG 2	35	35	14-May-27	02-Jul-27	0	BASE1010: SS 10	BW1000: SS 10, BE1010: FS
BASE1030	Basement - SOG 3	35	35	14-Jun-27	02-Aug-27	0	BASE1150: FS, BW1000: SS 10	BASE1040: SS 10
BASE1040	Basement - SOG 4	35	35	28-Jun-27	16-Aug-27	0	BASE1030: SS 10, BASE1160: FS	BASE1050: FS, BC1000: SS 10
BASE1050	Basement - Structural Steel Zone 1	20	20	17-Aug-27	14-Sep-27	8	BASE1040: FS	BASE1060: SS 5, BASE1080: FS
BASE1060	Basement - Structural Steel Zone 2	20	20	24-Aug-27	21-Sep-27	8	BASE1050: SS 5	BASE1070: SS 5, BASE1090: FS
BASE1070	Basement - Structural Steel Zone 3	20	20	31-Aug-27	28-Sep-27	8	BASE1060: SS 5	BASE1100: FS
BASE1080	Basement - SOMD 1	10	10	15-Sep-27	28-Sep-27	735	BASE1050: FS	
BASE1090	Basement - SOMD 2	10	10	22-Sep-27	05-Oct-27	730	BASE1060: FS	
BASE1100	Basement - SOMD3	10	10	29-Sep-27	12-Oct-27	8	BASE1070: FS	BA1000: FS, CON1000: FS
Dividing Wall		30	30	02-Apr-27	13-May-27	30		
BASE1120	Basement - Dividing Wall Pour 1	10	10	02-Apr-27	15-Apr-27	0	PRE1000: FS 10	BASE1130: SS 5
BASE1130	Basement - Dividing Wall Pour 2	10	10	09-Apr-27	22-Apr-27	0	BASE1120: SS 5	BASE1140: SS 5
BASE1140	Basement - Dividing Wall Pour 3	10	10	16-Apr-27	29-Apr-27	0	BASE1130: SS 5	BASE1150: SS 5, BASE1010: FS

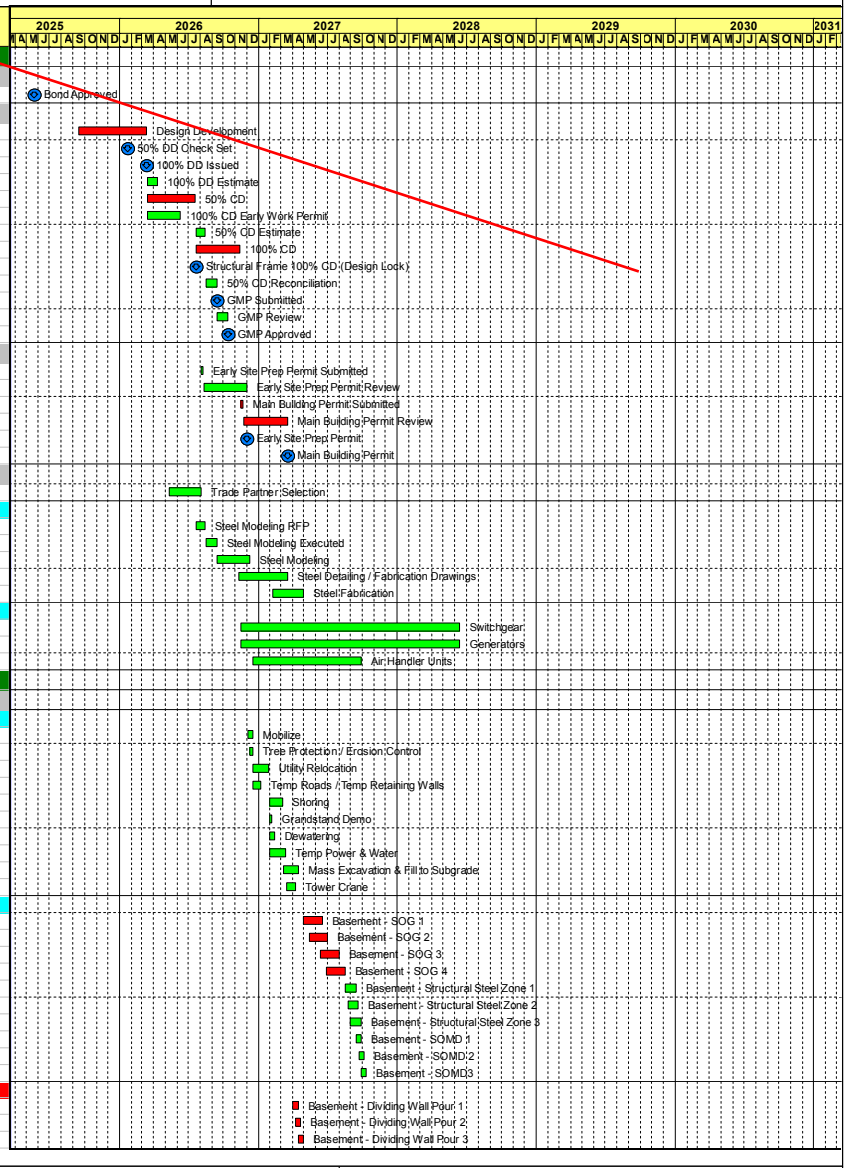

Activity ID	Activity Name	Orig Dur	Remaining Duration	Start	Finish	Total Float	Predecessor Details	Successor Details
BASE1150	Basement - Dividing Wall Pour 4	10	10	23-Apr-27	06-May-27	25	BASE1140: SS 5	BASE1160: SS 5, BASE1030: FS
BASE1160	Basement - Dividing Wall Pour 5	10	10	30-Apr-27	13-May-27	30	BASE1150: SS 5	BASE1040: FS
Interiors		90	90	14-Jun-28	19-Oct-28	70		
BASE1110	Electrical Room Buildout	90	90	14-Jun-28	19-Oct-28	70	PROC1130: FS, PROC1140: FS	COM1000: FS
South Bar East		385	385	28-May-27	04-Dec-28	50		
BW1000	South Bar- Slab On Grade	35	35	28-May-27	19-Jul-27	0	PRE1000: FS, SP1090: FS, BASE1020: SS	BW1010: FS, BASE1030: SS 10
BW1010	South Bar- Brace Frames	15	15	20-Jul-27	09-Aug-27	0	BW1000: FS, PROC1120: FS	BW1020: FS
BW1020	South Bar- Structural Steel L2	12	12	10-Aug-27	25-Aug-27	0	BW1010: FS	BW1030: FS
BW1030	South Bar- Structural Steel L3	12	12	26-Aug-27	13-Sep-27	0	BW1020: FS	BW1040: FS, BW1090: FS
BW1040	South Bar- Structural Steel L4	12	12	14-Sep-27	29-Sep-27	0	BW1030: FS	BW1050: FS
BW1050	South Bar- Structural Steel Roof	14	14	30-Sep-27	19-Oct-27	0	BW1040: FS	BW1060: FS, BW1070: FS
BW1060	South Bar- Temp Roof	20	20	20-Oct-27	16-Nov-27	0	BW1050: FS	BW1090: FS -40
BW1070	South Bar- Facade Dry In	60	60	20-Oct-27	17-Jan-28	0	BW1050: FS	BW1080: FS, BW1090: FS -80
BW1080	South Bar- Facade	60	60	18-Jan-28	10-Apr-28	215	BW1070: FS	PUN1070: FS
Interiors		305	305	22-Sep-27	04-Dec-28	0		
BW1090	South Bar- Level 1	260	260	22-Sep-27	28-Sep-28	0	BW1030: FS, BW1060: FS -40, BW1070: FS	BW1100: SS 15
BW1100	South Bar- Level 2	260	260	13-Oct-27	19-Oct-28	0	BW1090: SS 15	BW1110: SS 15
BW1110	South Bar- Level 3	260	260	03-Nov-27	09-Nov-28	0	BW1100: SS 15	BW1120: SS 15
BW1120	South Bar- Level 4	260	260	24-Nov-27	04-Dec-28	0	BW1110: SS 15	PUN1020: FS
Auditorium Wing		370	370	13-Jul-27	26-Dec-28	220		
BC1000	Aud.- SOG C1 (Theatre)	45	45	13-Jul-27	14-Sep-27	0	BASE1040: SS 10	BC1010: SS 10
BC1010	Aud.- SOG C2	35	35	27-Jul-27	14-Sep-27	0	BC1000: SS 10	BC1020: FS
BC1020	Aud.- Structural Steel	30	30	15-Sep-27	26-Oct-27	0	BC1010: FS	BC1050: FS, BC1100: FS, BC1110: FS
BC1050	Aud.- Structural Steel Roof	12	12	27-Oct-27	11-Nov-27	8	BC1020: FS	BC1060: FS, BC1080: FS
BC1060	Aud.- Facade Dry-in	60	60	12-Nov-27	09-Feb-28	8	BC1050: FS	BC1070: FS, BC1100: FS -80, BC1110: FS
BC1080	Aud.- Temp Roof	20	20	12-Nov-27	13-Dec-27	8	BC1050: FS	BC1100: FS -40, BC1110: FS -40
BC1070	Aud.- Facade	60	60	10-Feb-28	03-May-28	63	BC1060: FS	PUN1070: FS, SW1000: FS
Interiors		295	295	27-Oct-27	26-Dec-28	220		
BC1100	Aud.- Theater	280	280	27-Oct-27	04-Dec-28	0	BC1080: FS -40, BC1060: FS -80, BC1020:	PUN1040: FS
BC1110	Aud.- Choir	250	250	27-Oct-27	19-Oct-28	220	BC1080: FS -40, BC1060: FS -80, BC1020:	BC1120: SS 15
BC1120	Aud.- Band	250	250	17-Nov-27	09-Nov-28	220	BC1110: SS 15	BC1130: SS 15
BC1130	Aud.- Drama	250	250	10-Dec-27	04-Dec-28	220	BC1120: SS 15	BC1140: SS 15
BC1140	Aud.- Level 2	250	250	04-Jan-28	26-Dec-28	220	BC1130: SS 15	PUN1040: SS 15
Gym Wing		250	250	13-Oct-27	05-Oct-28	40		
BA1000	Gym - Structural Steel	30	30	13-Oct-27	23-Nov-27	40	BASE1100: FS	BA1010: FS
BA1010	Gym - Structural Steel Roof	20	20	24-Nov-27	23-Dec-27	40	BA1000: FS, PROC1150: FS 15	BA1020: FS, BA1040: FS
BA1020	Gym - Facade Dry-in	60	60	27-Dec-27	20-Mar-28	50	BA1010: FS	BA1030: FS
BA1040	Gym - Temp Roof	20	20	27-Dec-27	24-Jan-28	40	BA1010: FS	BA1060: FS
BA1030	Gym - Facade	60	60	21-Mar-28	13-Jun-28	50	BA1020: FS	PUN1070: FS 120
Interiors (GYM)		180	180	25-Jan-28	05-Oct-28	40		
BA1060	Athletics Lobby	150	150	25-Jan-28	23-Aug-28	40	BA1040: FS	BA1070: SS 40
BA1070	Gym	120	120	21-Mar-28	07-Sep-28	40	BA1060: SS 40	BA1080: SS 20
BA1080	Aux Gym	120	120	18-Apr-28	05-Oct-28	40	BA1070: SS 20	PUN1000: FS
South Bar West		299	299	06-Jul-27	06-Sep-28	111		
BE1010	South Bar - Brace Frames	15	15	06-Jul-27	26-Jul-27	61	BASE1020: FS	BE1020: FS
BE1020	South Bar - Structural Steel L2	12	12	27-Jul-27	11-Aug-27	61	BE1010: FS	BE1030: FS
BE1030	South Bar - Structural Steel L3	12	12	12-Aug-27	27-Aug-27	61	BE1020: FS	BE1090: FS, BE1050: FS
BE1050	South Bar - Structural Steel Roof	12	12	30-Aug-27	15-Sep-27	69	BE1030: FS	BE1060: FS, BE1070: FS
BE1060	South Bar - Temp Roof	20	20	16-Sep-27	13-Oct-27	69	BE1050: FS	BE1090: FS -40
BE1070	South Bar - Facade Dry In	60	60	16-Sep-27	10-Dec-27	69	BE1050: FS	BE1080: FS, BE1090: FS -80
BE1080	South Bar - Facade	60	60	13-Dec-27	07-Mar-28	239	BE1070: FS	PUN1070: FS
Interiors		260	260	30-Aug-27	06-Sep-28	61		
BE1090	South Bar - Level 1	230	230	30-Aug-27	25-Jul-28	61	BE1030: FS, BE1060: FS -40, BE1070: FS -	BE1100: SS 15
BE1100	South Bar - Level 2	230	230	21-Sep-27	15-Aug-28	61	BE1090: SS 15	BE1110: SS 15
BE1110	South Bar - Level 3	230	230	12-Oct-27	06-Sep-28	61	BE1100: SS 15	PUN1020: FS
Connector		342	342	13-Oct-27	16-Feb-29	383		
CON1000	SOG	35	35	13-Oct-27	02-Dec-27	8	BASE1100: FS	CON1010: FS
CON1010	Brace Frames	15	15	03-Dec-27	23-Dec-27	8	CON1000: FS	CON1020: FS
CON1020	Mass Timber L2	12	12	27-Dec-27	12-Jan-28	8	CON1010: FS	CON1030: FS, CON1040: FS, CON1060
CON1030	Temp Roof	20	20	13-Jan-28	09-Feb-28	28	CON1020: FS	CON1060: FS -40
CON1040	Facade Dry-in	40	40	13-Jan-28	08-Mar-28	583	CON1020: FS	CON1050: FS
CON1060	Commons / Servery	280	280	13-Jan-28	16-Feb-29	8	CON1030: FS -40, CON1020: FS	PUN1080: FS
CON1050	Facade	40	40	09-Mar-28	03-May-28	583	CON1040: FS	
Site Work		150	150	04-May-28	06-Dec-28	63		
SW1000	Site Work - Area A	90	90	04-May-28	11-Sep-28	63	BC1070: FS	SW1010: SS 15
SW1010	Site Work - Area B	90	90	25-May-28	02-Oct-28	63	SW1000: SS 15	SW1020: SS 15

Remaining Level of Effort | Actual Work | Critical Remaining Work

Actual Level of Effort | Remaining Work | Meeting Milestone

Ida B Wells High School

Activity ID	Activity Name	Orig Dur	Remaining Duration	Start	Finish	Total Float	Predecessor Details	Successor Details
SW1020	Site Work - Area C	90	90	16-Jun-28	23-Oct-28	63	SW1010: SS 15	SW1030: SS 15
SW1030	Site Work - Area D	90	90	10-Jul-28	13-Nov-28	63	SW1020: SS 15	SW1040: SS 15
SW1040	Site Work - Area E	90	90	31-Jul-28	06-Dec-28	63	SW1030: SS 15	9000: FS, PUN1060: FS
Commissioning		100	100	05-Dec-28	25-Apr-29	0		
COM1000	Gym - Commissioning	60	60	05-Dec-28	28-Feb-29	40	PUN1010: SS, BASE1110: FS	9000: FS
COM1010	South Bar - Commissioning	60	60	01-Feb-29	25-Apr-29	0	PUN1020: FS	9000: FS
COM1020	Aud.- Commissioning	60	60	01-Feb-29	25-Apr-29	0	PUN1050: SS	9000: FS
Punchlist		132	132	06-Oct-28	13-Apr-29	8		
PUN1000	Gym - Pre-Punchlist	40	40	06-Oct-28	04-Dec-28	40	BA1080: FS	PUN1010: FS
PUN1010	Gym - Punchlist	40	40	05-Dec-28	31-Jan-29	40	PUN1000: FS	9000: FS, COM1000: SS
PUN1020	South Bar - Punchlist	40	40	05-Dec-28	31-Jan-29	0	BW1120: FS, BE1110: FS	9000: FS, COM1010: FS
PUN1040	Aud.- Pre-Punchlist	40	40	05-Dec-28	31-Jan-29	0	BC1100: FS, BC1140: SS 15	PUN1050: FS
PUN1070	Facade - Punchlist	50	50	05-Dec-28	14-Feb-29	50	BC1070: FS, BA1030: FS 120, BE1080: FS,	9000: FS
PUN1060	Site Work Punchlist	35	35	07-Dec-28	26-Jan-29	63	SW1040: FS	9000: FS
PUN1050	Aud.- Punchlist	40	40	01-Feb-29	28-Mar-29	0	PUN1040: FS	9000: FS, COM1020: SS
PUN1080	Connector Punchlist	40	40	19-Feb-29	13-Apr-29	8	CON1060: FS	9000: FS
Closeout		54	54	26-Apr-29	12-Jul-29	281		
9000	Substantial Completion	5	5	26-Apr-29	02-May-29*	0	PUN1010: FS, PUN1050: FS, COM1000: FS	9010: FS, 9020: FS
9010	FFE	30	30	03-May-29	14-Jun-29	281	9000: FS	A1150: FS
9020	Extended Commissioning	30	30	03-May-29	14-Jun-29	281	9000: FS	A1150: FS
A1150	Building District Move in	19	19	15-Jun-29	12-Jul-29	281	9010: FS, 9020: FS	A1250: FS
A1160	Schools Out	0	0	15-Jun-29*		0		A1170: FS, A1230: FS
Phase 2		300	300	15-Jun-29	20-Aug-30	0		
A1170	Abatement	60	60	15-Jun-29	10-Sep-29	0	A1160: FS	A1180: FS -40
A1230	Rieke Site Improvements	50	50	15-Jun-29	24-Aug-29	250	A1160: FS	A1240: FS
A1180	Demo	60	60	16-Jul-29	08-Oct-29	0	A1170: FS -40	A1210: FS
A1240	Rieke Site Turnover	0	0		24-Aug-29	250	A1230: FS	A1250: FS
A1210	Field Construction (Phase 1.5 Opportunity)	160	160	09-Oct-29	24-May-30	0	A1180: FS	A1220: FS
A1220	Phase 2 Turn Over	0	0		24-May-30	0	A1210: FS	A1250: FS, A1270: FS
A1270	Project Closeout	60	60	28-May-30	20-Aug-30	0	A1220: FS	A1250: FS
A1250	Project Final Completion	0	0		20-Aug-30	0	A1240: FS, A1220: FS, A1150: FS, A1270: F