2021

LONG-RANGE FACILITY PLAN

VOLUME 2: SITE SUMMARIES

PORTLAND PUBLIC SCHOOLS

2021 DECEMBER 14

BOARD ACCEPTED ISSUANCE

This plan addresses the provisions of OAR 581-027-0040, Long-Range Facility Plan Requirements, and Section 5 of ORS 195.110, School Facility Plan for Large School Districts.

BRIC ARCHITECTURE

PPS

CONTENTS

06 PRE-K & ELEMENTARY SCHOOLS

22 K-8 SCHOOLS

34 MIDDLE SCHOOLS

44 HIGH SCHOOLS

76 ALTERNATIVE SCHOOLS

94 VACANT & SWING SITES

PRE-K SCHOOLS

APPLEGATE EARLY LEARNING CENTER

ADDRESS
7650 N COMMERCIAL AVE

CONSTRUCTION DATE
1954 (PRIMARY)

LEVELS
1

BLDG AREA
27,785 SF

SITE AREA
59,677 SF
1.37 ACRES

CLASSROOMS COUNT
13

FUNCTIONAL CAPACITY
192 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
1

ZONING
RESIDENTIAL 5,000 CU
RESIDENTIAL 2,000 CU

HISTORIC SUMMARY

Applegate Early Learning Center is located in the Piedmont Neighborhood of North Portland. The campus is situated at the south end of Farragut Park. In addition to the primary classroom building, the campus includes a portable classroom building located at the west portion of the property.

The main school building has a rectangular massing with a wood frame that rests on a poured concrete foundation. Designed in the Northwest Regional style, the building features a moderately pitched gable roof and overhanging eaves. Vinyl siding covers the single story building. Fenestration consists primarily of wood frame windows.

Development in the neighborhood consists of a mixture of single family houses, multi-family residences, and mid-size commercial and industrial buildings. In addition to the primary classroom building, the campus includes a portable located at the west portion of the property.

The school is not eligible for the NRHP under Criterion A.

FACILITY CONDITION SUMMARY

The Applegate Early Learning Center facility is 67 years old, and in poor condition with a facility condition index (FCI) score of 0.14

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures had exceeded their typical design lives. The domestic water distribution equipment was recently replaced.
- The vast majority of the steam heating equipment, exhaust fans, air handling units, fan coil units, controls and associated equipment had exceeded their design lives.

Fire Protection

- The building did not have a fire suppression system.
- An addressable fire alarm system headend (Potter PFC-6800) and associated detection and signal devices were installed in 2019.

Electrical

- The building's main electrical switchboard was replaced in 1996; however, four panel boards had exceeded their typical design lives. One panel board (IT1) had been added as part of a telecommunications upgrade in 1996.

Arch/Struct/Site

- The exterior windows of the main building had heavily weathered wood frames and the paint finish was peeling.
- The roof hatch on the main building had weak springs and damaged latch hardware.
- The carpet floor finish in the main building had excessive wear and staining in traffic areas.
- The painted concrete floor finish in the main building had excessive wear and chipping throughout.
- The concrete pedestrian paving at the main building's entrance had moderate cracking and settlement that had caused uneven surfaces.
- The chain link perimeter site fencing had moderately rusted frames and chain link fabric.
- Head Start classrooms are former elementary general classrooms. Classrooms are undersized for early learning (75% of size standard).
- Fencing is minimal. The administrative area is near the entrance but does not have visual access or control of the main entry. There is no entry vestibule or buzzer system.

EDUCATIONAL PROGRAM FORECAST

- Facilities upgrades to pre-k classrooms to support the needs of early learners, including improvements to the Native culture classroom.

RECENT CAPITAL EXPENDITURES

- Water Heater Replacement in 2018

EDUCATIONAL SUITABILITY

CLARENDON EARLY LEARNING CENTER

ADDRESS
9325 N VAN HOUTEN AVE

CONSTRUCTION DATE
1970 (PRIMARY)

LEVELS
1

BLDG AREA
40,723 SF

SITE AREA
185,566 SF
4.26 ACRES

CLASSROOMS COUNT
15

FUNCTIONAL CAPACITY
165 STUDENTS

CLUSTER
ROOSEVELT

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

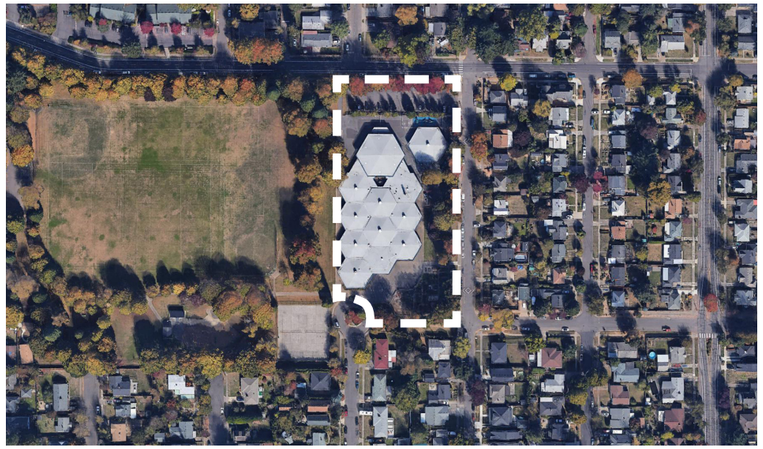

HISTORICAL SUMMARY

The Clarendon school campus consists of the 1970-1971 main classroom building and a 1970-1971 play shed. The main classroom building is a single story poured concrete structure comprised of a series of interconnected hexagons. The primary cladding is red brick and horizontal tongue-and-groove siding. Each hexagonal building unit features a modestly pitched hexagonal roof capped by a hexagonal-shaped cupola glazed with multi-colored glass. The expressive use of poured concrete on the interior as the primary structure with little emphasis on hierarchical ornamentation is illustrative of the Brutalist style.

Clarendon is situated in the Portsmouth neighborhood of Portland, Oregon. The neighborhood largely consists of residences constructed 1940-1970. Adjacent to residences to the north, east, and south, the parcel is also adjoined by the broad open play fields of Northgate Park to the west.

Given the uniqueness of both the design and planning process used to arrive at the design choice, the Clarendon School is eligible for the National Register of Historic Places under Criteria A and C.

FACILITY CONDITION SUMMARY

The Clarendon Early Learning Center facility is 51 years old, and in fair condition with a facility condition index (FCI) score of 0.07.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the plumbing fixtures had exceeded their design lives.
» The domestic water distribution equipment was recently replaced and was in good condition.
» The vast majority of the heating equipment, air handlers, exhaust fans, and associated equipment had exceeded their design lives.

Fire Protection

» Piping was estimated to be original to the building and had exceeded its intended useful design life.
» An addressable fire alarm system headend (Silent Knight 5820XL) and associated detection and signal devices were installed in 2014.

Electrical

» The site's electrical distribution system (including main switchboard and panel boards) had exceeded its intended design life; however, three 208Y/120V panel boards had been replaced more recently.

Arch/Struct/Site

» The slab on grade had moderate linear cracking.
» The roof hatch had weak springs, missing seals, and aged and corroded hardware.
» The carpeting and lockers were approaching the end of typical design life.

RECENT CAPITAL EXPENDITURES

» HVAC Upgrades in 2018
» Parking Restriping in 2019
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» The renovated former "open concept" school provides spaces that support a variety of teaching and learning styles. All instructional spaces include restrooms.
» Doors except for the main entrance are secured. The main entrance is near the office/reception area allowing for visual access; however, there is not an entry vestibule or buzzer system.

EDUCATIONAL PROGRAM FORECAST

» Facilities upgrades to pre-k classrooms to support the needs of early learners.

SACAJAWEA EARLY LEARNING CENTER

ADDRESS
4800 NE 74TH AVE

CONSTRUCTION DATE
1952 (PRIMARY)

LEVELS
1

BLDG AREA
18,862 SF

SITE AREA
152,242 SF
3.5 ACRES

CLASSROOMS COUNT
11

FUNCTIONAL CAPACITY
108 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
0

ZONING
R7 RESIDENTIAL 7,000 CU

HISTORICAL SUMMARY

The Sacajawea Head Start facility is located in a primarily residential neighborhood in Northeast Portland. Built in 1953, the International style school building (386A) is situated on a grass and asphalt-covered campus. The wood frame building sits on a poured concrete foundation. The main mass of the building is covered by a flat roof. The projecting wings on the east and west sides of the building are covered with shed roofs. Cladding consists of a mixture of red brick and vertical board and batten siding. The modified rectangular shape plan houses classrooms, a play room/cafeteria, a kitchen, and an administrative office.

The principal entry to the school is from the south on NE 74th Avenue. The playground and playfields are located directly to the north and the east of the school. The parking area is located directly to the north of the building.

A good example of the mid-century school design that retains its integrity with its floor plan, interior finishes, fenestration, and cladding intact. The original Sacajawea Elementary School was built in response to the residential development in southwest Portland during the PPS program of post-war construction and is eligible for the National Register of Historic Places (NRHP) under Criterion A.

FACILITY CONDITION SUMMARY

The Sacajawea Early Learning Center facility is 69 years old, and in fair condition with a facility condition index (FCI) score of 0.1.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- Plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
- The 200-MBH gas water heater was replaced in 2010 and had no major deficiencies. The boiler appeared to be original to the facilities construction; however, the burner assembly was retrofitted to gas in 1997.
- There were two air handling units located in the mechanical room (Room 114). Both air handlers had exceeded their typical design lives. Additional heat was provided by fin tub radiators, which were located throughout the facility.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and had no major deficiencies observed or reported.
- No fire suppression systems were observed during the assessment.

Electrical

- The main switchboard at this facility was replaced in 1996 along with several distribution panels. The remaining electrical distribution panels were original to building construction in 1953 and had exceeded their typical design life.
- The majority of the exterior lighting had recently been upgraded to LED with the exception of four fixtures that appeared to have been installed in 1996 with the other electrical upgrades. The interior lighting was predominantly T8 fluorescent fixtures, which also appeared to have been installed in 1996.

Arch/Struct/Site

- The carpeted areas were rippled in classrooms. A section of vinyl composition tile at the east end of the east-west main hallway, (near the main office) was cracked and deteriorated.
- Staff indicated there was an ongoing leak from a former repair to water piping in the Mechanical Room restroom.
- The exterior wood windows were aged.
- The roof was inaccessible; however, there were stains to the interior ceiling tile in Room 100. No other signs of water intrusion were observed.

RECENT CAPITAL EXPENDITURES

- Playground/fencing improvements in 2017
- Select flooring replacements in 2018

EDUCATIONAL SUITABILITY

- There are very limited spaces to support differentiated learning or flexible groupings. Several vacant rooms provide some flexibility.
- The early childhood rooms are undersized (approximately 74% of the size standard).
- Each classroom has a sink.
- The casework in the classrooms is not sized for early learners (too high).
- The cafeteria is used as an activity space, as students eat in their classrooms. The kitchen lacks a dishwasher.
- Early childhood spaces lack adjacent restrooms; the restrooms are located down a hall.
- There is no covered play area and the only play structure is not accessible and is distant from most of the classrooms.
- Office staff have no active supervision of the main entrance.

EDUCATIONAL PROGRAM FORECAST

- Facilities upgrades to pre-k classrooms to support the needs of early learners.

ELEMENTARY SCHOOLS

ABERNETHY ELEMENTARY SCHOOL

ADDRESS
2421 SE ORANGE AVE

CONSTRUCTION DATE
1924 (PRIMARY)

LEVELS
2

BLDG AREA
48,246 SF

SITE AREA
171,191 SF
3.93 ACRES

CLASSROOMS COUNT
21

FUNCTIONAL CAPACITY
522 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
2

ZONING
RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

The Abernethy Elementary School consists of a two-story school building, an attached one-story classroom wing and two portable classrooms. Located in the primarily single family residential neighborhood of the Ladd's Addition Historic District in Southeast Portland, it was built in 1924 in the Classical Revival style.

The building is a reinforced concrete structure with brick veneer, cast stone, and terra cotta ornamentation. The two-story school building is covered by a flat roof and sits on a concrete foundation.

The school is situated on a grass-covered and asphalt campus with a play field southwest of the main building. There are asphalt-covered playgrounds west and south of the school. A covered, open-sided play shed is located northwest of the school. An arboretum/garden and gazebo are located to the north of the building. Two detached portable buildings occupy the northeast end of the parcel.

The 1924 Classical Revival style school is recommended as eligible for the National Register of Historic Places (NRHP) for its association with progressive era public school construction in Portland (Criterion A).

RESJ CONSIDERATIONS

Facility improvements would not be especially impactful to underserved communities as Abernethy serves a less diverse student population with relatively low poverty levels compared to the district averages.

» For the 2021-22 school year, 10% of students are historically underserved; this is well below the K-5 school mean (34%).
» For the 2021-22 school year, 8% of students qualify for free or reduced lunch, significantly below the elementary school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Abernethy is forecast at 90% utilization. By the 2030-31 school year, utilization is projected to decline to 84%.

FACILITY CONDITION SUMMARY

Originally constructed in 1924, Abernethy Elementary School is 97 years old, and in poor condition with a facility condition index (FCI) score of 0.16. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the HVAC system had exceeded its typical design life. The boilers were aged; however, their burners were retrofitted to natural gas in 2006. The condensate pump package was heavily corroded. The classrooms had unit ventilators, while other areas of the facility utilized air handling units and fin tube radiators.
» The facility's water heater, located in the boiler room, was replaced around 2012.
» The plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles.

Fire Protection

» The fire alarm control panel and fire alarm devices had recently been replaced and had no major deficiencies observed or reported.
» The main facility was protected by a wet pipe sprinkler system covering the majority of the building including the corridors, stairwells, auditorium balcony, and classroom entrances. There were no major deficiencies observed or reported.

Electrical

» The main distribution switchboard and the majority of the panel boards in this facility had exceeded their typical design lives. The switchboard and some of the older panels were manufactured by Federal Pacific, whose breakers have been known to fail to trip when overloaded, thus creating a fire hazard.
» The majority of the interior lighting had been replaced; however, there were still some older fixtures in place which were in need of replacement.

Arch/Struct/Site

» The flooring in the kitchen area was beyond design life. Staff reported that the floor's poor condition and kitchen cooler's elevation make it difficult to transfer food racks.

RECENT CAPITAL EXPENDITURES

» Carpet Replacement (one room) in 2018
» Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

» Classrooms are significantly undersized (60% of size standard). Two kindergarten classrooms are located in portables. One kindergarten classroom lacks a dedicated, adjacent restroom.
» The school does not include purposely designed spaces for special education. No SPED classrooms are present.
» The school has neither a dedicated art room nor a science room.
» Furniture and finishes are worn and dated in appearance.
» A stage is present.
» An appropriately sized, dedicated music classroom is provided.
» The campus lacks drop-off lanes; all vehicle and bus access is along the street.
» There are multiple security challenges at this site, including the lack of a controlled main entrance, inadequate fencing, and poor lines of sight.
» The gym is greatly undersized (less than 50% of standard).
» The library is undersized and is essentially a repurposed corridor.
» The cafeteria and kitchen are undersized with poor acoustics.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Re-purpose space to create an art exhibition area.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of All Gender Task Force, (including restrooms).
» Re-purpose existing space

to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the District's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

AINSWORTH ELEMENTARY SCHOOL

ADDRESS
2425 SW VISTA AVE

CONSTRUCTION DATE
1912 (PRIMARY)

LEVELS
2

BLDG AREA
57,188 SF

SITE AREA
165,092 SF
3.79 ACRES

CLASSROOMS COUNT
28

FUNCTIONAL CAPACITY
636 STUDENTS

CLUSTER
LINCOLN

MODULAR CLASSROOMS
4

ZONING
RESIDENTIAL 5,000 CU

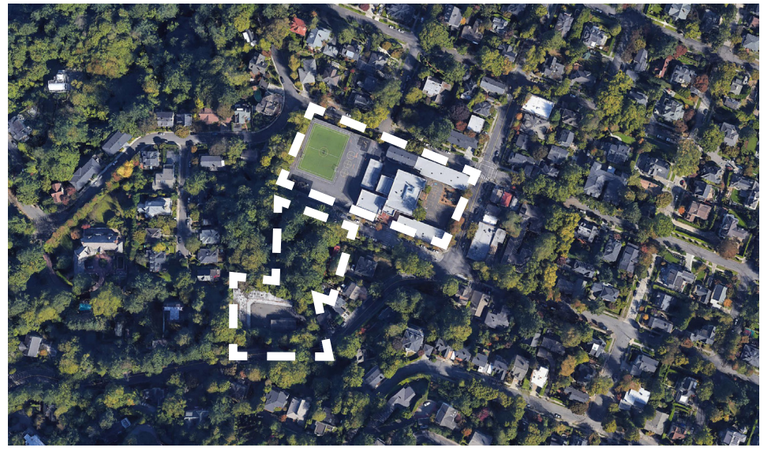

HISTORICAL SUMMARY

The Ainsworth Elementary School is situated in a primarily single family residential neighborhood in the Southwest Hills District of Portland, located on Vista Avenue. The campus consists of a main classroom building, gymnasium addition, a detached four- classroom wing, an annex that is located on a hill above the main campus, a covered playshed, and three interconnected portable buildings containing six classrooms. Built in 1912, the Collegiate Gothic style main building is a flat roof, two-story, reinforced concrete structure with brick veneer and terra cotta and cast stone ornamentation.

The school is situated on a tree-lined but predominantly asphalt-covered campus with playgrounds located to the northwest and southeast of the main building. A double height gymnasium was constructed in 1928. A covered, opensided play shed, built in 1935, is located adjacent to the northwest corner of the building. Three detached portable buildings located at the north end of the parcel were added between 1948 and 1953. The rectangular, detached classroom wing was constructed in 1953, while the one story, L-shape annex was built in 1962.

The 1912 Collegiate Gothic style school is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Facility improvements would not be especially impactful to underserved communities, as Ainsworth serves a slightly less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 23% of students are historically underserved; this is less than the K-5 school mean (34%).
» For the 2020-21 school year, 6% of students qualified for free or reduced lunch, well below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Ainsworth is forecast at 99% utilization. Utilization is projected to remain steady over the next decade, declining slightly to 98% by the 2030-31 school year.

FACILITY CONDITION SUMMARY

Originally constructed in 1912, Ainsworth Elementary School is 109 years old, and in poor condition with a facility condition index (FCI) score of 0.16. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The boilers and air handlers in the main building were replaced in the 1970s.
- Temperature control issues were reported in the main building and north addition.
- The HVAC equipment for the gym addition was replaced in 2018.
- The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

- The school had a wet pipe sprinkler system that served the basement of the building.
- The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

- The electrical distribution equipment had exceeded typical design life.
- Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- The main wood entry doors on the main building and north addition were heavily worn.
- The wood window frames on the south addition were heavily weathered with flaking paint.
- The exterior bricks on the west end of the south addition had significant step cracking and joint separation.
- On the gym addition, the original wood window frames were heavily weathered with flaking paint.
- The majority of the roof covering on the annex was covered in moss and appeared to be beyond its design life.
- The gutters and downspouts were not draining properly.
- The majority of the interior finishes in all buildings were well-maintained, but beyond their design lives.

RECENT CAPITAL EXPENDITURES

- Select Flooring Replacements in 2018-19
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- The layout of the campus has multiple detached buildings with poor lines of sight. Classrooms are distributed among five (5) buildings with disparate conditions.
- Furniture and finishes are worn and dated in appearance.
- A small art room is present in the Annex; however, it is less than 50% of the recommended size and positioned far from most classrooms.
- Performing arts spaces are rated as adequate.
- The school does not include purposely designed spaces for special education. No SPED classrooms are present.
- The cafeteria and kitchen are undersized with poor acoustics and no natural light.
- The gym is greatly undersized (less than 50% of standard).
- The campus lacks drop-off lanes; all vehicle and bus access is along the street.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Facilities upgrades to existing art classroom to align with the district's Educational Specifications with a working, properly ventilated kiln.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

ALAMEDA ELEMENTARY SCHOOL

ADDRESS
2732 NE FREMONT ST

CONSTRUCTION DATE
1922 (PRIMARY)

LEVELS
2

BLDG AREA
65,765 SF

SITE AREA
159,865 SF
3.67 ACRES

CLASSROOMS COUNT
34

FUNCTIONAL CAPACITY
792 STUDENTS

CLUSTER
GRANT

MODULAR BLDG
2

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated between the Irvington and Alameda neighborhoods of northeast Portland, the Alameda Elementary School campus consists of a 1922 Ushaped building and two 1918 portable buildings. The primary Colonial Revival building is a one-story wood structure ornamented by a pediment topped portico and gabled roofs with rounded dormers. Double loaded corridors provide access to the administrative offices located along the north wing and classrooms located along the east and west wings of the building. Two classroom additions were made to the original building in 1954 and 1992.

Within four years of the construction of the primary building, an auditorium and classroom wings located off the south end of the east and west sides of the building were added to the school. Also in 1925, the sheltered play courts, located along the interior elevations of east and west wings, were enclosed to form a gym and additional classroom space. Other additions include the construction of a kitchen in 1951, classroom addition off the south end of the west wing in 1954, and more classrooms off the south end of the east elevation in 1992.

The 1922 Colonial Revival school and 1918 ancillary buildings are recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Facility improvements would not be especially impactful to underserved communities, as Alameda serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 10% of students are historically underserved; this is less than the K-5 school mean (34%).
» For the 2020-21 school year, 4% of students qualified for free or reduced lunch, well below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Alameda is forecast at 84% utilization. By the 2030-31 school year, utilization is projected to decline to 81%.

FACILITY CONDITION SUMMARY

Originally constructed in 1922, Alameda Elementary School is 99 years old, and in poor condition with a facility condition index (FCI) score of 0.2. As the average FCI score for K-5s is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The boilers and air handlers in the main building were replaced in the 1970s.
» Temperature control issues were reported in the main building and north addition.
» The HVAC equipment for the gym addition was replaced in 2018.
» The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

» The school had a wet pipe sprinkler system that served the basement of the building.
» The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

» The electrical distribution equipment had exceeded typical design life.
» Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

» The main wood entry doors on the main building and north addition were heavily worn.
» The wood window frames on the south addition were heavily weathered with flaking paint.
» The exterior bricks on the west end of the south addition had significant step cracking and joint separation.
» On the gym addition, the original wood window frames were heavily weathered with flaking paint.
» The majority of the roof covering on the annex was covered in moss and appeared to be beyond its design life.
» The gutters and downspouts were not draining properly.
» The majority of the interior finishes in all buildings were well-maintained, but beyond their design lives.

RECENT CAPITAL EXPENDITURES

» Water Heater Replacement in 2018
» Replacement of Boiler Room Condensate Tank in 2018
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» Classroom sizes vary greatly, with some rooms only 58-75% of required size standard. The two SPED classrooms only meet 75% of the size standard.
» A dedicated art room is not present, though a kiln is located adjacent to the music room.
» An auditorium with a small stage is present. There is also a second stage connected to the cafeteria in the Annex.
» A library media center with a makerspace is present.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom

ARLETA ELEMENTARY SCHOOL

ADDRESS
5109 SE 66TH AVE

CONSTRUCTION DATE
1929 (PRIMARY)

LEVELS
2

BLDG AREA
71,185 SF

SITE AREA
182,081 SF
4.18 ACRES

CLASSROOMS COUNT
29

FUNCTIONAL CAPACITY
696 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
0

ZONING
OS - OPEN SPACE CU

HISTORICAL SUMMARY

Arleta Elementary School is located in the Mt. Scott-Arleta Neighborhood of Southeast Portland. In addition to the main school building and an L-shaped detached annex built in 1953, the campus includes a playfield and asphalt-covered play areas situated on a rectangular parcel. The primary school building is a rectangular, two-story structure covered by a flat roof. The reinforced concrete building, clad in variegated brick, rests on a poured concrete foundation. Designed in the Classical Revival style, the building is divided bi-laterally by a projecting bay embellished with pilasters and rounded arches.

Development in the Mt. Scott-Arleta Neighborhood consists of a mixture of single family houses, small commercial facilities, and multi-family residential buildings.

Arleta Elementary retains a high degree of integrity and is therefore eligible for the National Register of Historic Places under Criterion A as an example of school planning.

RESJ CONSIDERATIONS

Arleta's student population is largely reflective of district-wide averages for K-5 schools:

» For the 2021-22 school year, 27% of students identified as BIPOC; this is below the K-5 school mean (34%).
» For the 2021-22 school year, 28% of students qualified for free or reduced lunch; this is slightly more than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Arleta is forecast at 49% utilization. By the 2030-31 school year, utilization is projected to decline to 44%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Originally constructed in 1929, Arleta Elementary School is 92 years old, and in poor condition with a facility condition index (FCI) score of 0.23. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the mechanical and plumbing system were aged and had exceeded their intended design lives. Boiler 1 has had frequent issues. Both boilers' associated piping was heavily corroded.

Fire Protection

» The fire alarm control panel and fire alarm devices had exceeded design life.
» The main facility had a wet-pipe sprinkler system typically covering the classrooms and corridors. No major deficiencies were observed or reported with the fire protection system at the time of assessment.

Electrical

» Half of the distribution panel boards had exceeded design life. The generator and transfer switch in the boiler room had exceeded design life. There was a photovoltaic array installed on the roof, installed around 2015. The PV array was in good condition.

Arch/Struct/Site

» Paint was chipped off the older steel window frames on the exterior allowing the steel to corrode.
» Minor blisters and moderate degranulation was occurring on the rolled roofing, and some of the roof drains were partially clogged. There was heavy moss growth on the roof covering under the PV panels.
» There were a few crumbled bricks in the exterior wall and the brick mortar appeared to be weakening or separating from the bricks.
» The concrete stairs on the west exterior were heavily cracked and crumbling.
» Where present, the wood window frames and trim have flaking paint and cracked sealant, mainly at the auditorium.
»

RECENT CAPITAL EXPENDITURES

» Water Heater Replacement in 2018
» Replacement of Boiler Room Condensate Tank in 2018
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» Classroom sizes vary greatly, with some rooms only 58-75% of required size standard. The two SPED classrooms only meet 75% of the size standard.
» A dedicated art room is not present, though a kiln is located adjacent to the music room.
» An auditorium with a small stage is present. There is also a second stage connected to the cafeteria in the Annex.
» A library media center with a makerspace is present.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Evaluate Arleta as a possible candidate for adding or repurposing space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners in Southeast Portland.
» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with

and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the District's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

ATKINSON ELEMENTARY SCHOOL

ADDRESS
5800 SE DIVISION ST

CONSTRUCTION DATE
1953 (PRIMARY)

LEVELS
1

BLDG AREA
54,472 SF

SITE AREA
132,858 SF
3.05 ACRES

CLASSROOMS COUNT
25

FUNCTIONAL CAPACITY
567 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
0

ZONING
R2 RESIDENTIAL 2,000 CU

HISTORICAL SUMMARY

Constructed in the Northwest Regional style, Atkinson Elementary School is located northeast of Clinton Park in Southeast Portland. Designed to be expanded as enrollment increased, the campus consists of three buildings connected by covered passageways. The single-story buildings form a variation on a finger plan type school with decentralized functions that became popular in the mid-twentieth century.

Clinton Park surrounds the campus on the south and west. Franklin High School is also located adjacent to the park. The surrounding district comprises primarily single family residences built between 1900-1950. Directly adjacent to the tree shaded play areas of Clinton Park, the campus retains a pastoral quality despite its urban location. The facility consists of three single story building units configured in roughly an L-shaped plan with connecting corridors. Between the buildings courtyard spaces provide natural light and furnish connections to the outdoors.
An excellent example of a finger plan school with a decentralized and functionally segregated floor plan, Atkinson Elementary School is eligible for the NRHP under Criterion C.

RESJ CONSIDERATIONS

Facility improvements would not be especially impactful to underserved communities, as Atkinson serves a slightly less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 31% of students are histrorically underserved; this is below the K-5 school mean of 34%.
» For the 2021-22 school year, 17% of students qualified for free or reduced lunch; this is less than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Atkinson Elementary is forecast

at 70% utilization. By the 2030-31 school year, utilization is projected to decline to 62%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Originally constructed in 1953, Atkinson Elementary School is 68 years old, and in poor condition with a facility condition index (FCI) score of 0.18. The average FCI score for K-5 schools in PPS is 0.18.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the mechanical and plumbing system were aged and had exceeded their intended design lives. Signage was present throughout indicating pipe and equipment insulation contained asbestos.

Fire Protection

- The fire alarm control panel and fire alarm devices were approaching the end of design life.
- A sprinkler system was not observed in any of the facilities on site. However, there was a fire suppression standpipe connected to fire hose cabinets located throughout all facilities. There were no deficiencies observed or reported at the time of assessment.

Electrical

- Approximately 65% of the distribution panel boards had exceeded design life. There was a photovoltaic array installed on the roof, installed around 2015. The PV array was in good condition.

Arch/Struct/Site

- Stained acoustic ceiling tiles were observed.
- A few cracked and missing floor tiles were observed in the student restrooms.
- Exterior engineered wood wall panels have been repainted, but the underlying wood was heavily weathered.
- The exterior metal doors were moderately dented
- The exterior metal doors of Bldg B and C were moderately dented.
- A few cracked and missing floor tiles were observed in the student restrooms of Bldg C.
- The carpet in the library of Bldg C was worn and bunching.

RECENT CAPITAL EXPENDITURES

- Lead Paint Abatement in 2017.
- Fire Alarm Upgrades in 2020.

EDUCATIONAL SUITABILITY

- There are few flexible spaces that allow for differentiated instruction.
- The finishes are worn and dated throughout the building.
- The kindergarten classrooms are 75% of the size standard.
- The SPED classroom lacks a dedicated ADA restroom with changing table.
- The music room is greatly undersized (67% of size standard).
- A dedicated art room is not present.
- The gym is slightly undersized and lacks acoustical treatments.
- The library media center is greatly undersized (55% of size standard) and not centrally located.
- The multipurpose room/cafeteria is undersized with a small stage.
- The campus lacks drop-off lanes; all vehicle and bus access is along the street.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

BEACH ELEMENTARY SCHOOL

ADDRESS
1710 N HUMBOLDT ST.

CONSTRUCTION DATE
1928 (PRIMARY)

LEVELS
3

BLDG AREA
70,498 SF

SITE AREA
227,819 SF
5.23 ACRES

CLASSROOMS COUNT
33

FUNCTIONAL CAPACITY
750 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
3

ZONING
R5 - RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Beach School is situated in the primarily single family residential Overlook neighborhood in North Portland. The campus consists of a two-story school building with a ground floor basement, a detached classroom building , and an L-shaped portable. Built in 1928, the Collegiate Gothic style building is a reinforced concrete structure clad with brick veneer and cast stone ornamentation. The H-shaped corridor plan of the primary building sits on a concrete foundation.

The school faces North Humboldt Street, with play fields and playgrounds south and west of the main school building. South of the main building is a one story 13-classroom annex, and a one-story three-classroom Head Start facility. The school's parking area is located to the west of the main building.

In comparison with other Portland schools during the same period and constructed of similar styles, Beach Elementary School retains its integrity and is therefore eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Beach School's student population is largely reflective of PPS' district-wide averages for K-5 schools:

» For the 2021-22 school year, 45% of students are historically underserved; this is above the K-5 school mean (34%).
» For the 2021-22 school year, 24% of students qualified for free or reduced lunch; this is slightly below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Beach Elementary is forecast at 55% utilization. By the 2030-31 school year, utilization is projected to decline slightly to 53%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Beach School is 93 years old, and in poor condition as with a facility condition index (FCI) score of 0.17. As the average FCI score for K-5 schools in PPS is 0.18, the building condition is slightly better than many elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of restroom lavatories, classroom sinks, and urinals had exceeded typical design life.
» The domestic water piping and sanitary waste piping was assumed to be original and assumed to have exceeded typical design life.
» One of the water heaters and both boilers had exceeded typical design life.
» The classroom ventilators and fan coil units had exceeded typical design life.

Fire Protection

» The fire alarm control panel and alarm devices were in good condition with no deficiencies observed.
» The fire suppression system had exceeded its design life.

Electrical

» Approximately 12 of the distribution panel boards had exceeded typical design life.

Arch/Struct/Site

» Staff noted a known rodent issue in the main building, annex, and portable.
» The exterior wood windows were aged beyond typical design life.
» There were large areas of alligator cracking on the upper roof area of the main building. There was organic growth on the roof covering on the east sections of the lower roof.
» The asphalt surfaces had large areas of alligator cracking.

RECENT CAPITAL EXPENDITURES

» Sewer Line Replacement in 2019
» Sidewalk / Curb Replacement in 2018
» Wireless Upgrades in 2020
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» The building has very few flexible learning areas.
» Classroom sizes range from 67% to 93% with most less than 80% of the size standard. The kindergarten classrooms are 75% of the size requirement.
» The room finishes are worn and dated.
» This facility does not have space that is purposely designed for special education.
» The gym is 54% of the size standard.
» The school has some VAPA resources, such as an undersized art room, a kiln, a small dedicated music room, and an auditorium with a stage.
» The cafeteria is 70% of the size standard with an undersized kitchen.
» The east side of the campus has no perimeter fencing.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement

room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

BEVERLY CLEARY - HOLLYROOD K-1

ADDRESS
3560 NE HOLLYROOD CT

CONSTRUCTION DATE
1958 (PRIMARY)

LEVELS
1

BLDG AREA
15,541 SF

SITE AREA
37,897 SF
0.87 ACRES

CLASSROOMS COUNT
9

FUNCTIONAL CAPACITY
228 STUDENTS

CLUSTER
GRANT

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Hollyrood Elementary School is located in the Grant Park neighborhood of Northeast Portland. The inconspicuous property includes only the main school building. The one story building reflects the International style through its horizontal appearance, glazed curtain walls, low slope butterfly roof and wide overhanging eaves.

The property is bounded by Hollyrood Ct. to the north, Grant Park to the south, NE 36th Ave. to the east, and NE 35th Pl. to the west. A playshed not located on PPS property is situated to the south of the school within Grant Park. The school occupies much of the property although a small play area is positioned to the east of the school. Development in the surrounding area consists primarily of single family residences built between 1910 and 1950.

The school is not eligible for the NRHP under Criterion A & C.

RESJ CONSIDERATIONS

» Please refer to Beverly Cleary Fernwood (K-8).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Beverly Cleary (both Fernwood and Hollyrood combined) is forecast at 80%. Enrollment is expected to decline over the next several years, reaching 68% (for both Fernwood and Hollyrood combined) by 2030-31.

FACILITY CONDITION SUMMARY

Beverly Cleary (Hollyrood) School is 63 years old, and in fair condition with a facility condition index (FCI) score of 0.1. As the average FCI score for K-5 schools in PPS is 0.18, the building is in better condition than most elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures had exceeded their typical design lives. The domestic water distribution equipment was recently replaced.
- The vast majority of the heating and cooling equipment, exhaust fans, and associated equipment had exceeded their design lives.

Fire Protection

- The building was partially sprinkled. The piping was estimated to be original to the building and had exceeded its typical design life.
- An addressable fire alarm system headend (Potter PFC-6800) and associated detection and signal devices were installed in 2019.

Electrical

- The building's 208Y/120V main electrical switchboard was original to the building (1958) and had exceeded its typical design life. Four of the five panel boards were also original to the building and had exceeded their typical design lives, while panelboard IT1 had been added as part of a telecommunications upgrade in 1997.

Arch/Struct/Site

- The metal roof hatch had weak springs that did not adequately support the weight of the hatch and the latch hardware had rust corrosion.
- The play area's bituminous paving had excessive alligator cracking throughout.
- The parking lot's top surface was degraded and there was linear and alligator cracking throughout.

RECENT CAPITAL EXPENDITURES

- ADA Upgrades (door knob replacements) in 2019
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- The school lacks a music room, and art room, and any sort of performing arts area or stage.
- The school lacks a gym as well as a cafeteria. Makeshift classrooms are used both for physical activity and dining functions.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the District's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

TITLE **FUTURE SCHOOL**
ARTISTS **KORA JOHNSTON & EVY KAKUSKA**
GRADE **7**
SCHOOL **JACKSON MS**
TEACHER **JESSICA HICKEY**

BOISE-ELIOT ELEMENTARY SCHOOL

ADDRESS
620 N FREMONT ST.

CONSTRUCTION DATE
1926 (PRIMARY)

LEVELS
2

BLDG AREA
65,248 SF

SITE AREA
173,804 SF
3.99 ACRES

CLASSROOMS COUNT
35

FUNCTIONAL CAPACITY
651 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
0

ZONING
R1 RESIDENTIAL 1,000 CU

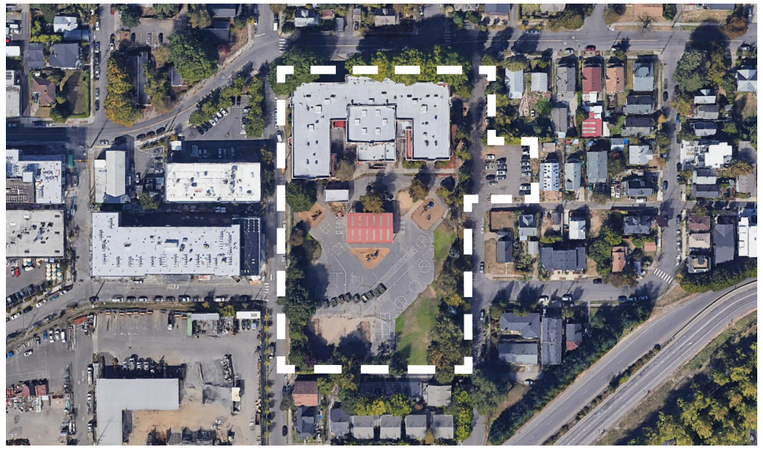

HISTORICAL SUMMARY

Boise-Eliot Elementary School is a two story reinforced concrete building with brick veneer designed in the Classical Revival style. The campus consists of a U-shaped building , a concrete block storage shed , and a covered play shed. Constructed in 1927, the school exhibits extensive use of cast-stone ornamentation to express its Classical Revival style. The school features projecting bays, bay windows, and bands of vinyl sash windows that are arranged symmetrically.

The neighborhood consists of a mix of single family residences, multi-story apartments, and commercial buildings built primarily between 1910 and 1950. The Boise-Eliot campus occupies one-and-one-half city blocks and part of a right-of-way. The school is located on the north end of the campus, with play areas and open space on the south end of the campus, and parking is provided on the west end of the campus. A covered play shed (1980) and a concrete block storage building (1990) are located to the south of the primary building.

While Boise-Eliot Elementary School is a notable historic resource, it does not retain a level of historical integrity commensurate with other Portland schools constructed during the same period; therefore, it is not eligible for listing in the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Boise-Eliot Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 75% of students are historically underserved this is significantly above the K-5 school mean of 34%.
- For the 2021-22 school year, 55% of students qualified for free or reduced lunch; this is significantly more than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Boise-Eliot is forecast at 56% utilization. Utilization is projected to remain steady with a slight decline to 55% by 2030-31.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Boise-Eliot Elementary School is 95 years old, and in poor condition with a facility condition index (FCI) score of 0.2. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures had exceeded typical design life.
- The domestic water piping and sanitary waste piping was assumed to be original and had assumed to have exceeded typical design life.
- Both water heaters and boilers had exceeded typical design life.
- The ventilation exhaust fans/ supply fans had exceeded typical design life.
- The pneumatic controls and associated air compressor had exceeded typical design life.

Fire Protection

- The fire alarm control panel and alarm devices were in good condition with no deficiencies observed.
- The fire suppression system had exceeded its design life.

Electrical

- The head custodian reported the need for security around the attached playground/asphalt surface. No current fencing or cameras in the rear of the school.
- The main distribution switchgear and approximately 15 of the distribution panels had exceeded typical design life.
- The interior lighting and master clock system were approaching the end of typical design life.
- The natural gas generator had exceeded typical design life.

Arch/Struct/Site

- Staff noted lack of security cameras and lack of adequate site fencing. Staff reported that needles were frequently found during early morning cleaning around the play areas.
- Multiple staff noted a known rodent issue in ceiling areas.
- The majority of interior architectural components had exceeded design life.
- The metal exterior stairs and handrails had large areas of corrosion.
- The metal canopy at the covered play area had areas of rust on the beams and columns.
- The asphalt surfaces had large areas of alligator cracking.

RECENT CAPITAL EXPENDITURES

- Fire Sprinkler Repairs in 2019
- Gym Floor Refinishing in 2019
- Security Upgrades to Main Office in 2020
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- General classrooms and special education classroom are undersized. Kindergarten classroom sizes in particular only meet 50-60% of the size standard.
- A small science room is present.
- The gym is undersized with inadequate storage.
- The school has both a music room and an art room.
- An auditorium is present, though it has poor acoustics.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure.
- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource

Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

» Construct a new gymnasium.
» Expand, relocate and/or re-purpose pre-k classroom space to support effective early childhood instruction and programming.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

BRIDGER ELEMENTARY SCHOOL

ADDRESS
7910 SE MARKET ST

CONSTRUCTION DATE
1951 (PRIMARY)

LEVELS
1

BLDG AREA
48,948 SF

SITE AREA
253,955 SF
5.83 ACRES

CLASSROOMS COUNT
26

FUNCTIONAL CAPACITY
561 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
6

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

The Bridger School (originally Hudson Primary) is a one story brick veneer building designed in the International style. The campus consists of a single story brick-faced building built in 1951 expanded to form a modified E-shaped plan in 1959 , and two portable classroom buildings. The wings that comprise the arms of the E-shaped plan are separated by two exterior courtyards and form a finger plan type school. The building features a linear composition and asymmetrical plan.

The campus occupies an irregular shaped parcel that is bound on the north by SE Market Street, on the east by SE 80th Street, on the south by SE Mill Street, and on the west by single family homes. The school is located on the east end of the campus, and parking is provided along the north and west sides of the building. Recreational facilities include playground space along the south end of the building, and play fields occupy the west end of the campus. Two portable classroom buildings are located to the south of the main facility and along the east end of the campus.

While Bridger School is associated with PPS post war development, the building does not display the level of integrity and significance to make it eligible for listing in the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Bridger Elementary School has attributes that place it in a moderately high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 50% of students are historically underserved; this is greater than the K-5 school mean (34%).
» For the 2021-22 school year, 24% of students qualified for free or reduced lunch, slightly less than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Bridger School is forecast at 67% utilization. By the 2030-31 school year, utilization is projected to decline to 60%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Bridger School is 70 years old, and in poor condition with a facility condition index (FCI) score of .24. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The roof drains had missing or damaged covers and were blocked by debris build-up.
» Most of the HVAC equipment was original to the facility's construction in 1951 and had exceeded its typical design life.

Fire Protection

» The facility did not have a fire suppression system.

Electrical

» The site's service entrance equipment was replaced in 1998. However, the majority of the electrical system was original to the facility's construction and had exceeded its typical design life.

Arch/Struct/Site

» There was moderate ponding occurring across the roof covering. The coating on the roof covering was heavily deteriorated and cracking throughout the surface. The gutters were moderately corroded and detached in one area on the southwest corner.
» The majority of the interior finishes were aged beyond their typical design lives, with many floor tiles or ACT ceiling tiles having been patched numerous times.
» The exterior brick wall was heavily weathered, particularly on the south wall with major cracking occurring in the southeast corner of the building.
» The exterior wood siding on the south façade was weathered with flaking paint.
» The exterior doors and windows had exceeded their design lives.

RECENT CAPITAL EXPENDITURES

» Select Flooring Replacements in 2018
» Modular classroom addition in 2019
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» There are no designed spaces to support differentiated learning activities or groups.
» The school does not include purposely designed spaces for special education.
» A slightly undersized science classroom is present (82% of size standard).
» The school lacks both a dedicated music room and art room.
» The gym is undersized (62% of size standard).
» The library media center lacks an office or work room.
» The cafeteria has a stage. The servery is poorly configured.
» The main entrance lacks a buzzer/camera system or security vestibule.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Re-purpose space to create an art exhibition area.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

BRIDLEMILE ELEMENTARY SCHOOL

ADDRESS
4300 SW 47TH DR

CONSTRUCTION DATE
1958 (PRIMARY)

LEVELS
1

BLDG AREA
56,220 SF

SITE AREA
316,618 SF
7.27 ACRES

CLASSROOMS COUNT
26

FUNCTIONAL CAPACITY
645 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
0

ZONING
R7 RESIDENTIAL 7,000 CU

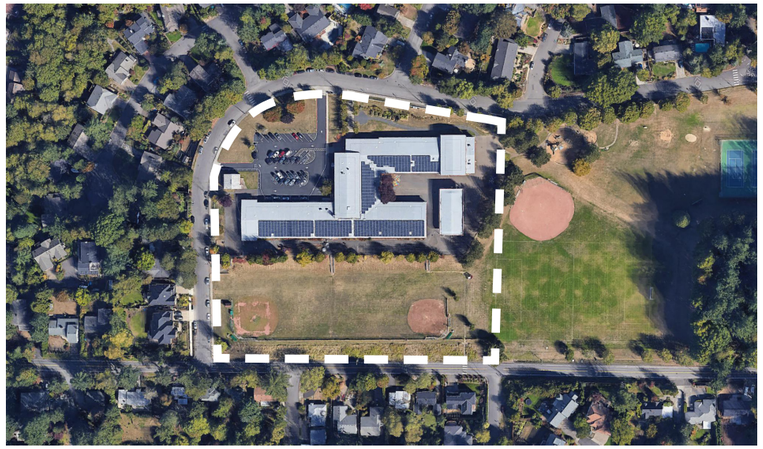

HISTORICAL SUMMARY

Bridlemile School is located in Southwest Portland. The campus consists of the primary school building, a detached portable classroom , and a covered playshed. The finger plan type school incorporates an interior garden to provide maximum light and ventilation to the classrooms. The school's campus is located at the northwest corner of Hamilton Park. Development in the neighborhood consists primarily of single family residences on large parcels of land built between 1950 and 2000. Three playfields are located at the south end of the parcel.

The H-shaped primary school building rests on a poured concrete foundation. The wood frame building is clad in variegated brick. A moderately pitched gable roof covers the single story building.

A good example of the finger plan type school that retains its integrity with its floor plan, interior finishes, fenestration, and cladding, Bridlemile School is recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Bridlemile serves a less diverse student population with relatively low poverty levels compared to the district average.

- For the 2021-22 school year, 17% of students are historically underserved; this is below the K-5 school mean (34%).
- For the 2021-22 school year, 8% of students qualified for free or reduced lunch, significantly below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Bridlemile is forecast at 72% utilization. By the 2030-31 school year, utilization is projected to decline slightly to 69%.

FACILITY CONDITION SUMMARY

Bridlemile School is 63 years old, and in poor condition with a facility condition index (FCI) score of 0.17. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the mechanical and plumbing system were aged and had exceeded their intended design lives. Signage was present throughout indicating pipe and equipment insulation contained asbestos. The condensate pump package in the mechanical room has been actively leaking. The leak has caused the neighboring water heater and expansion tank to begin to corrode.

Fire Protection

- The fire alarm control panel and devices were upgraded in 2018 and were in good condition with no deficiencies observed.
- The main facility had a wet-pipe sprinkler system typically that served the auditorium's back of stage area. No major deficiencies were observed or reported with the fire protection system at the time of assessment.

Electrical

- Approximately 75% of the distribution panel boards had exceeded design life. There was a photovoltaic array installed on the roof, installed around 2015. The PV array was in good condition.

Arch/Struct/Site

- The exterior wood doors were moderately to heavily weathered.
- Most of the downspouts were leaking during rain.
- The exterior engineered wood paneling was flaking paint.
- A few moderate to major cracks were observed in the brick interior walls in the north corridors and boiler room.
- The gutter was leaking water down the exterior wall of Portable 1.
- The parking lot was resealed in 2018. There were two significant potholes that need repaired.
- The paved play area south of the school was moderately cracked and several locations heaved along tree line.
- The concrete sidewalk was cracked north of the main entrance.
- The covered play structure had damage to the wood cladding.

RECENT CAPITAL EXPENDITURES

- Portable Classroom Abatement in 2017
- Play Structure Replacement in 2018
- Select Flooring Replacements in 2018
- ADA Upgrades in 2019
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- Finishes are worn and dated.
- A dedicated art room is not present.
- The SPED classroom is appropriately sized but lacks storage.
- The gym is greatly undersized (63% of size standard).
- The main entry is not easily supervised or directly visible.
- A art room is not present.
- A dedicated music room and a small performing arts area is provided.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom

per the district's Educational Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

BUCKMAN ELEMENTARY SCHOOL

ADDRESS
320 SE 16TH AVE

CONSTRUCTION DATE
1921 (PRIMARY)

LEVELS
2

BLDG AREA
74,161 SF

SITE AREA
211,702 SF
4.86 ACRES

CLASSROOMS COUNT
28

FUNCTIONAL CAPACITY
654 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

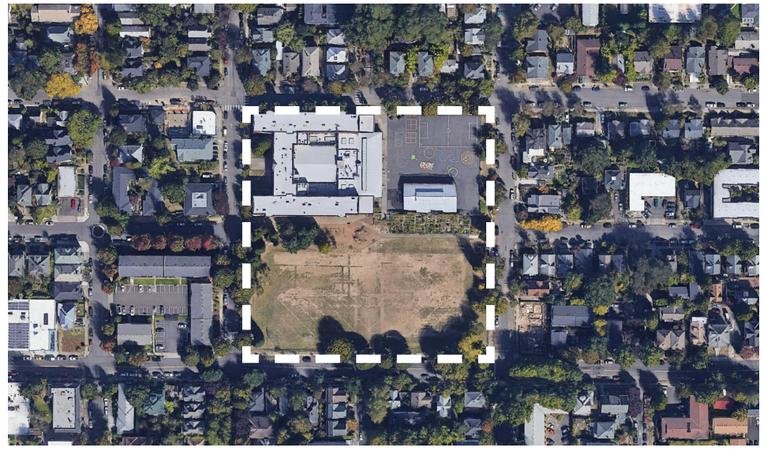

HISTORICAL SUMMARY

Situated in the Buckman neighborhood of Southeast Portland, the 1921 Buckman Elementary School consists of a U-shaped plan. The two-story Collegiate Gothic building is constructed of concrete with a facing of decorative brickwork and terra cotta detailing.

The primary building was constructed in phases between 1922 and 1930. Alterations include the remodeling of the library in 1967 and 1977 and the school office in 1984. Other alterations include the replacement of ceiling tiles (1962), floor tiles (1985, 1988, and 1989), exterior doors (1987), windows (1987), classroom cabinets (1990), and lighting fixtures.

RESJ CONSIDERATIONS

Facility improvements would not be especially impactful to underserved communities, as Buckman serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 26% of Buckman's students are historically underserved; this is less than the K-5 school mean of 34%
» For the 2021-22 school year, 21% of students qualified for free or reduced lunch, below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Buckman Elementary is forecast at 69% utilization. By the 2030-31 school year, utilization is projected to decline slightly to 66%.

FACILITY CONDITION SUMMARY

Buckman Elementary School is 100 years old, and in poor condition with a facility condition index (FCI) score of 0.19. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments

conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- There were temperature control issues in classroom 112 at the time of the assessment. The heat would not turn off and a portable air condition unit was being used to cool the room down.
- The majority of the domestic water distribution equipment had been replaced in the past three years.
- The boilers were replaced in the early 2000s, and in 2015 the rooftop exhaust fans were replaced and large destratification fans were added to the gym. The remaining equipment was original to facility construction.
- The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

- The school had a wet pipe sprinkler system that served the entire building.
- The fire alarm control panel and alarm devices had no deficiencies observed.
-

Electrical

- The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- Moderate cracking was occurring in the south exterior concrete wall.
- One roof hatch was tearing at its hinge. Moderate surface corrosion was present on both roof hatches.
- Multiple concrete exterior stairs had cracks or were crumbling or broken.
- The VCT in the cafeteria was coming loose in spots, with stress cracking in many of the tiles.
- The wood floor was delaminating throughout the cafeteria and gymnasiums.
- There was a major crack in the southwest retaining wall.

RECENT CAPITAL EXPENDITURES

- Sewer Line Repairs in 2018
- Stage Refinishing in 2020
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- Small, poorly configured classrooms do not support a range of learning styles. General classrooms meet 75% of the size standard.
- Finishes are worn and dated.
- The school does not have purposely designed spaces for Special Education.
- Music spaces are located adjacent to the cafeteria which creates noise issues during instructional periods.
- Art rooms are present but have limited storage and equipment. The sinks and wet areas do not have the proper flooring, drains or ventilation.
- The gym is undersized (72% of size standard) with worn flooring.
- The cafeteria, kitchen and servery are undersized and do not have access to natural light.
- There are no designated parent / student pick-up and drop-off areas.
- There are no controlled entrances throughout the building.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure
- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

- Construct a new gymnasium.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

CAPITOL HILL ELEMENTARY SCHOOL

ADDRESS
8401 SW 17TH AVE

CONSTRUCTION DATE
1917 (PRIMARY)

LEVELS
2

BLDG AREA
51,812 SF

SITE AREA
192,100 SF
4.41 ACRES

CLASSROOMS COUNT
20

FUNCTIONAL CAPACITY
456 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
1

ZONING
RESIDENTIAL 5,000 CU

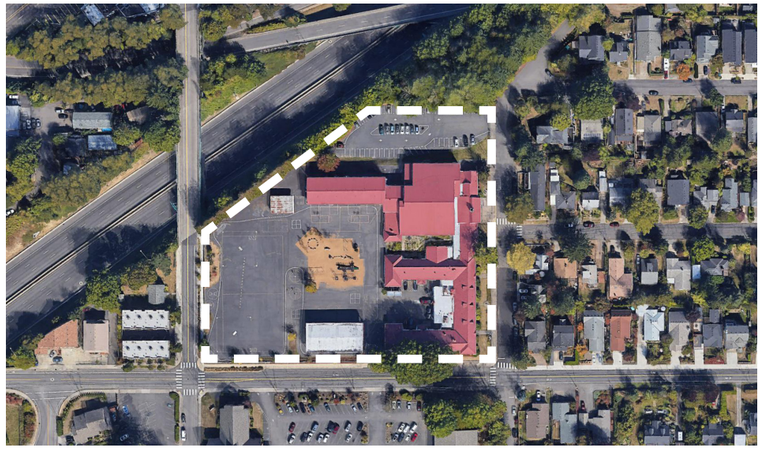

HISTORICAL SUMMARY

Capitol Hill Elementary School is located in Southwest Portland. The primary building on the school campus is an E-shaped classroom and administrative building situated at the southeast corner of the lot. Originally constructed in 1917, the building received significant additions in 1948 and again in 1952. Other structures on the property include a 1968 portable classroom and a 1977 covered playshed.

The original building was designed in the Colonial Revival style with the primary architectural ornamentation focused on the entries to the original building.

The School is located in the Markham neighborhood. Development in the neighborhood consists of a mixture of educational and religious institutions, single family residences, and recent multi-family residential developments. An asphalt-covered parking lot and play areas provide a buffer from Interstate 5 which runs along the north and west sides of the campus.

Due to the lack of integrity the buildings are not eligible for the National Register of Historic Places under Criterion A, B, or C.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Capitol Hill serves a less diverse student population with relatively low poverty levels compared to the district average.

- For the 2021-22 school year, 17% of students are historically underserved; this is below the K-5 school mean of 34%.
- For the 2021-22 school year, 12% of students qualified for free or reduced lunch, as compared to a district-wide (K-5) school mean of 26%.

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Capitol Hill Elementary is forecast at 83% utilization. By the 2030-31 school year, utilization is projected to decline to 78%.

FACILITY CONDITION SUMMARY

Capitol Hill Elementary School is 104 years old, and in poor condition with a facility condition index (FCI) score of 0.20. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the mechanical and plumbing system were aged and had exceeded their intended design lives. Signage was present throughout indicating pipe and equipment insulation contained asbestos. Ducting observed in the south addition's attic was damaged and not properly sealed allowing air to escape.

Fire Protection

- The fire alarm control panel and devices were upgraded in 2018 and were in good condition with no deficiencies observed.
- No fire suppression systems were observed at the site.

Electrical

- Approximately 55% of the distribution panels had exceed design life. The generator and transfer switch had both exceeded design life.

Arch/Struct/Site

- The roof was not accessible, but the gutters were full of debris that was visible from the ground level.
- The exterior engineered wood siding and window trim was flaking paint and had signs of water infiltration.
- The east exterior stairs of the North Building were spalling with some moderate cracks.
- Acoustic ceiling tiles were stained in various areas.
- The east concrete exterior stairs of the South Building were mossy with some moderate to major cracking.
- The exterior door of Portable 1 was moderately dented.
- The hard play area pavement was cracked, most noticeably at the northwest elevation. There were areas of pavement heaving caused by tree roots along west property line.
- Parking stops were missing and/or deteriorated.

RECENT CAPITAL EXPENDITURES

- Security Upgrades in 2017
- Installation of Bouldering Wall in Gym in 2017
- Playground Addition in 2018
- Asbestos Remediation in 2020
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- Classrooms and common spaces have dated and failing finishes.
- The school does not have purposely designed spaces for Special Education.
- There is no dedicated music room.
- An art room is present.
- The gym is 74% of the recommended size.
- There is no direct line of sight to the main entry. The entry doors cannot be remotely controlled from the main office.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

CHAPMAN ELEMENTARY SCHOOL

ADDRESS
1445 NW 26TH AVE

CONSTRUCTION DATE
1923 (PRIMARY)

LEVELS
3

BLDG AREA
64,385 SF

SITE AREA
294,901 SF
6.77 ACRES

CLASSROOMS COUNT
28

FUNCTIONAL CAPACITY
618 STUDENTS

CLUSTER
LINCOLN

MODULAR CLASSROOMS
3

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in a primarily single family, residential neighborhood in the Northwest District of Portland, the Chapman Elementary School campus consists of a primary classroom building, a portable building, and a covered playshed. Built in 1923, the main building is a flat roof, reinforced concrete structure with brick cladding. The square mass of the building rests on a concrete foundation. Designed in the Classical Revival style, the building features cast stone ornamentation and a concrete classical-style front entry with Ionic columns. The two-story building features a basement, and provides facilities for classrooms, a gymnasium, an auditorium, playrooms, and an administrative office.

The Chapman Elementary School, which faces Wallace Park, is situated on a mostly grass-covered campus. Recreational facilities include a substantial playfield located to the west of the main building and asphalt covered playgrounds to the north and northwest of the school.

A covered, open-sided play shed is located on the northwest corner of the campus. The portable is located at the south end of the parcel.

Chapman Elementary School retains excellent integrity with minimal alterations to its plan, exterior, and interior finishes. The 1923 Classical Revival school is recommended as eligible for the National Register of Historic Places (NRHP) for its association with progressive era public school construction in Portland (Criterion A).

RESJ CONSIDERATIONS

Facility improvements would not be especially impactful to underserved communities; Chapman's student population is relatively less diverse and with lower poverty rates than the average PPS (K-5) school.

» For the 2019-20 school year, 31% of Chapman's students are historically underserved; this is less than the K-5 school mean of 34%.
» For the 2020-21 school year, 27% of Chapman students qualified

for free or reduced lunch; this is slightly above the K-5 school mean of 26%.

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Chapman Elementary is forecast at 70% utilization. By the 2030-31 school year, utilization is projected to increase to 77%.

FACILITY CONDITION SUMMARY

Chapman Elementary School is 98 years old, and in critical condition with a facility condition index (FCI) score of 0.43. As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly worse condition than most other elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- Plumbing fixtures were aged but operational. The water closet flush valves had been updated with dual-flush handles.
- The boilers in the basement were replaced in 1977 and other major HVAC equipment was original to the facility.

Fire Protection

- The fire alarm system was observed to be in average condition with no major deficiencies.

Electrical

- Seven panels were found to be aged past typical design life. A majority of the electrical service and distribution had exceeded typical design life.
- The interior lighting, generator, grounding system, and automatic transfer switch had exceeded typical design life.
- The communications system was found to be in average condition with no major deficiencies.

Arch/Struct/Site

- The automatic door opener and lock mechanism at the ADA entrance were reported by facility staff to not function properly. The staff in the main office were often not able to activate the ADA door when someone uses the intercom system.
- The HVAC system in Portable 1 was reported to be troublesome even after several parts were recently replaced. One of the units had caught fire last year, but has since been replaced with a "used" unit.
- The roof coverings on the Main Building and Portable 1 were observed to be aged, blistered, cracked, and had moss growth in various areas.
- The lower built-up roofs with metallic top coating had exceeded typical design life, their top coating was deteriorated and cracked, and significant debris had collected in ponding areas and drain paths.
- The original metal frame skylights on the upper and lower roofs had corroded metal frames and deteriorated sealant.
- The fiberglass domes on the newer skylights on the upper roof had a deteriorated top gel coat and exposed fiberglass mesh, which was also beginning to deteriorate.
- Facility staff reported that the large wood mounted movable partitions between the gym/cafeteria and the auditorium were not operable.
- The vinyl composition tile (VCT) in the kitchen had exceeded typical design life and had excessive cracking throughout.

RECENT CAPITAL EXPENDITURES

- New Playground Installation in 2018
- Asbestos Remediation in 2020

EDUCATIONAL SUITABILITY

- There are few designed spaces to support differentiated learning or flexible groups.
- The general classrooms in the building meet approximately 75% of the size standard.
- No elevator is present.
- The school lacks purposely designed special education spaces.
- A dedicated music room and art room are present.
- Two (2) spaces for P.E. are provided; however, one is a small cafegymatorium.
- An auditorium with balcony seating and a small stage is present.
- The library media center lacks an office and workroom. It is also located on the 2nd floor (no elevator).
- The campus lacks drop-off lanes; all vehicle and bus access is along the street.
- The school has some perimeter fencing, but is open on all sides.
- The main entrance lacks a buzzer/camera system and remains open all day. There is no control of the main entrance from the office.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Add or re-purpose space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners.
- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

CHIEF JOSEPH ELEMENTARY SCHOOL

ADDRESS
2409 N SARATOGA STREET

CONSTRUCTION DATE
1949 (PRIMARY)

LEVELS
2

BLDG AREA
44,859 SF

SITE AREA
129,809 SF
2.98 ACRES

CLASSROOMS COUNT
20

FUNCTIONAL CAPACITY
499 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
2

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Arbor Lodge neighborhood of North Portland, Chief Joseph Elementary School occupies the southern portion of the campus. In addition to the main school building, the campus also features a portable classroom building. The wood frame school building is constructed in the International style. Cladding consists of a mixture of horizontal board, brick, and poured concrete. A shallow pitched gable roof covers the rectangular shaped building that rests on a poured concrete foundation. The two-story east wing includes two floors of classrooms and a double height gymnasium and auditorium.

Development in the vicinity of the school consists of a mixture of single family residences built between 1929 and 1950, larger multi-family residential buildings, and commercial buildings. Arbor Lodge Park is located across N Delaware Avenue from the west side of the school campus. Asphalt covered play areas are located on the north side of the campus.

A good example of a mid-twentieth century school design, that retains its integrity with its finger plan and many exterior and interior finishes intact, Chief Joseph Elementary School is recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Chief Joseph Elementary School serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2019-20 school year, 26% of students are historically underserved; this is less than the K-5 school mean of 34%.
» For the 2020-21 school year, 19% of students qualified for free or reduced lunch; this is less than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Chief Joseph Elementary is forecast at 64% utilization. By the 2030-31 school year, utilization is projected to decline to 58%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Chief Joseph Elementary School is 72 years old, and in poor condition with a facility condition index (FCI) score of 0.19. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the plumbing fixtures had exceeded typical design life.
» The domestic water piping and sanitary waste piping was assumed to be original and assumed to have exceeded typical design life.
» The boiler had exceeded typical design life.
» The ventilation exhaust fans/ supply fans had exceeded typical design life.
» The classroom ventilators and heaters had exceeded typical design life.
» The pneumatic controls and associated air compressor had exceeded typical design life.

Fire Protection

» The fire alarm control panel and alarm devices were in good condition with no deficiencies observed.
» The fire suppression system had exceeded its design life.

Electrical

» The main distribution switchgear and approximately 11 of the distribution panels had exceeded typical design life.
» The interior lighting was approaching the end of typical design life.

Arch/Struct/Site

» The majority of interior architectural components had exceeded design life.
» The exterior wood windows were aged beyond typical design life.
» The paint on the exterior wood siding and soffits was beginning to deteriorate.
» The asphalt surfaces had large areas of alligator cracking.
» The carpeting in the portable had exceeded design life and the wood door was observed to be cracked.

RECENT CAPITAL EXPENDITURES

» Playground Restriping in 2017

EDUCATIONAL SUITABILITY

» There are few designed spaces to support differentiated learning.
» The school lacks an elevator.
» The school lacks purposely designed special education spaces.
» The gym meets approximately 65% of the size standard.
» A dedicated art room is not present.
» Music is taught in a general classroom.
» A small stage is provided.
» The school does not have a buzzer/camera at the front door and there is no active supervision of the door from the office.
» The cafeteria is adequately sized, but the kitchen and servery are small.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.

- » Create an outdoor learning area to support STEM instruction and project-based learning.
- » Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- » Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
- » Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- » Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- » Re-purpose an existing space into a wellness room.
- » Allocate an area for a Reconnection Services office.
- » Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- » Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- » Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- » Expand P.E. storage by repurposing space and/or adding casework.
- » Allocate instructional, office, and meeting space for Virtual Scholars.

CRESTON ELEMENTARY SCHOOL

ADDRESS
4701 SE BUSH ST

CONSTRUCTION DATE
1948 (PRIMARY)

LEVELS
1

BLDG AREA
79,978 SF

SITE AREA
376,358 SF
8.64 ACRES

CLASSROOMS COUNT
27

FUNCTIONAL CAPACITY
558 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Creston Elementary School is situated in Creston Kenilworth neighborhood of Southeast Portland. Built in 1946, the school building is situated on a mostly grass-covered campus. Additional structures on the parcel include the 1953 Creston Annex which is a contributing resource. The International style school is L-shaped with flat and low pitched gable roofs. The single story building rests on a poured concrete foundation. Cladding for the wood frame structure consists of a mixture of brick veneer and stucco.

The school facilities include classrooms, a gymnasium, a library, an auditorium, and a cafeteria. Development in the surrounding area consists primarily of single family residences built after World War II and larger commercial buildings along SE Powell and SE Foster Roads. Grass covered playfields separate the main school building from the Creston Annex. The campus is adjacent to the tree shaded Creston Park.

Creston Elementary School is recommended as eligible for the National Register of Historic Places under Criterion A for its associations with the growth of the Portland Public School district in the mid twentieth century.

RESJ CONSIDERATIONS

Creston's student population is largely reflective of district-wide averages for K-5 schools:

- » For the 2019-20 school year, 31% of students identified as BIPOC; this is slightly than the K-5 school mean of (34%).
- » For the 2020-21 school year, 24% of students qualified for free or reduced lunch, which is the same as the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Creston Elementary School is forecast at 47% utilization. By the 2030-31 school year, utilization is projected to decline to 42%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Creston Elementary School is 73 years old, and in poor condition with a facility condition index (FCI) score of 0.16. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- Most of the domestic water equipment had been replaced in the past eight years and was observed to be in good condition.
- The majority of HVAC equipment was original to the facility and had exceeded its typical design life.

Fire Protection

- The facility did not have a fire suppression system.

Electrical

- The majority of the site's electrical system, including the service entrance equipment and distribution panel boards, had exceeded their typical design lives. The lighting throughout both facilities had been retrofitted to LED.

Arch/Struct/Site

- The exterior wood trim was heavily weathered and cracking and much of the paint had flaked off.
- The brick wall had severe separation and crumbling mortar; primarily on the south and west walls.
- Many long, narrow cracks were observed in the finish layer on the exterior concrete walls. Much of the exterior paint on the exterior concrete walls or wood siding had been patched with different shades of paint.
- Many of the interior wood doors displayed above-average surface wear.
- Many of the interior finishes were in average condition but had exceeded their typical design lives, such as ACT ceiling tiles, vinyl tile flooring and ceramic tile floor and wall coverings.

RECENT CAPITAL EXPENDITURES

- Annex Playground Upgrades in 2017
- ADA Upgrades to ISC Restroom in 2020
- Boiler Reinsulation and Replacement of Condensate Tank in 2018
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- General classrooms are generously sized, exceeding the size standard.
- The self-contained special education space in the school is a space originally designed for a music room. It does not have a sink, nor does it have an adjacent ADA restroom. The room also lacks natural light.
- A slightly undersized science classroom is present (87% of size standard).
- There is not a dedicated music room. Music is taught on the stage.
- There is not a dedicated art classroom.
- The gym is undersized (65% of standard) and lacks acoustical treatments.
- The school lacks an entry vestibule. The main office does not have remote control of the main entry doors.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Facilities upgrades to pre-k classrooms to support the needs of early learners.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

DUNIWAY ELEMENTARY SCHOOL

ADDRESS
7700 SE REED COLLEGE PL

CONSTRUCTION DATE
1926 (PRIMARY)

LEVELS
2

BLDG AREA
68,775 SF

SITE AREA
245,243 SF
5.63 ACRES

CLASSROOMS COUNT
27

FUNCTIONAL CAPACITY
552 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Eastmoreland neighborhood of Southeast Portland, Duniway Elementary School is a two story L-shaped building is situated at the northwest corner of the parcel. The reinforced concrete structure, faced in red brick, rests on a poured concrete foundation. The gable roof that covers the central wing is clad in red clad pantiles. Designed in the Collegiate Gothic style, the building features prominent cross gable roofs that distinguish the entries to the building. The building also features a number of projecting bay windows typically situated above entries or at ends of an elevation.

The neighborhood is comprised primarily of single family residences built 1928-1950. An asphalt covered parking lot is located to the north of the building. Asphalt covered play areas and several grassy play fields occupy the south and east ends of the campus.

Duniway School retains a high degree of integrity and is therefore eligible for the National Register of Historic Places under Criterion A as an example of school planning and the emerging development of the Eastmoreland neighborhood. The school is also eligible under Criterion C as an example of the work of George Jones in the Collegiate Gothic style.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Duniway serves a largely white student population with low poverty levels.

- For the 2019-20 school year, 10% of students are historically underserved, which is significantly less than the K-5 school mean (34%).
- For the 2020-21 school year, 5% of students qualified for free or reduced lunch, which is significantly lower than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Duniway Elementary is forecast at 89% utilization. By the 2030-31 school year, utilization is projected to decline to 85%.

FACILITY CONDITION SUMMARY

Duniway Elementary School is 95 years old, and in poor condition as with a facility condition index (FCI) score of 0.13. As the average FCI score for K-5 schools in PPS is 0.18, the building is in better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures had exceeded their design lives. The domestic water distribution equipment was recently replaced and is in good condition.
- The vast majority of the heating and cooling equipment, exhaust fans, and associated equipment had exceeded their design lives.

Fire Protection

- The building did not have a sprinkler system.
- An addressable fire alarm system headend (Silent Knight 5820XL) and associated detection and signal devices were installed (estimated) in 2014.

Electrical

- The building's main distribution switchboard was replaced in 1997, and a sub-distribution board had also been added at that time. A majority of the building's panel boards, however, were observed to have exceeded design life. Two new panel boards had been installed in 1997 as part of the telecommunications upgrade, and another in 2001 with the installation of the generator.

Arch/Struct/Site

- The window frames were aged, cracked and damaged.
- The roof sections had ponding and were aged. Frequent leaks were reported above the cafeteria and east end of the second floor.
- The majority of interior architectural components had exceeded design life.

RECENT CAPITAL EXPENDITURES

- Sidewalk / Curb Replacement in 2018
- Seismic Evaluation in 2018
- Abatement of Hazardous Substances in 2018-19
- Security Upgrades in 2020
- Roofing Replacement in 2020
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- Finishes are worn and dated.
- The average classroom size is 82% of the standard.
- The school lacks purposely designed special education spaces.
- A slightly undersized music room is present (88% of size standard).
- A very small (55% of size standard) art room is present, as well as a kiln (though not adjacent).
- Though two P.E. spaces are provided, the total sq. ft. of both gyms is only 76% of the standard.
- A small stage is provided (50% of size standard).
- The cafeteria and kitchen are undersized.
- The site is not adequately fenced.
- The main entrance is not supervised or controlled by the office.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area

to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

FOREST PARK ELEMENTARY SCHOOL

ADDRESS
9935 NW DURRETT ST

CONSTRUCTION DATE
1998 (PRIMARY)

LEVELS
2

BLDG AREA
62,833 SF

SITE AREA
6.62 SF
288,367 ACRES

CLASSROOMS COUNT
22

FUNCTIONAL CAPACITY
546 STUDENTS

CLUSTER
LINCOLN

MODULAR CLASSROOMS
10

ZONING
R10 RESIDENTIAL 10,000 CU

HISTORICAL SUMMARY

No Data

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities. While Forest Park Elementary has a moderately diverse student body, it has the lowest student poverty rates of any school in the district..

» For the 2021-22 school year, 9% of students are historically underserved; this is below the K-5 school mean (34%).
» For the 2021-22 school year, 0% of students qualified for free or reduced lunch, which is significantly below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Forest Park Elementary is forecast at 68% utilization. By the 2030-31 school year, utilization is projected to decline to 59%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Forest Park Elementary School is 23 years old, and in good condition with a facility condition index (FCI) score of 0.05. As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly better condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the domestic water equipment was replaced in 2015 and was observed to be in good condition.
» The rooftop condensing unit serving the kitchen freezer had frozen cooling coils at the time of the assessment.

» Most of the HVAC equipment was original to the facility's construction in 1998.

Fire Protection

» The fire protection system was assumed to be original to construction and had exceeded typical design life.

Electrical

» The electrical distribution system appeared to have been original to construction and was in good condition with no major deficiencies observed.

Arch/Struct/Site

» The aluminum windows of the Main Building had evidence of water infiltration at the window frame/rough opening and at the perimeter glazing gasketing. (Second level windows at STR01 and room #128.)
» The superstructure (supporting the metal roof) of the covered play area was observed to be corroded.
» The roof coverings on all of the portable buildings (1-5) were observed to have moss and organic moss growth on the asphalt shingles causing accelerated deterioration.

RECENT CAPITAL EXPENDITURES

» Wireless Upgrades in 2018.
» Fire Alarm Upgrades in 2019.
» Drinking Fountain Fixture Replacements in 2021.

EDUCATIONAL SUITABILITY

» Half of the classrooms serving grades 3-5 are in portables. The average size of kindergarten classrooms is only 78% of the size standard.
» The school lacks purposely designed special education spaces.
» The music room is 78% of the recommended room size.
» The PE space is 65% of the recommended size.
» No art classroom is present.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

TITLE	**FUTURE SCHOOL**
ARTIST	**YAEL HOROWITZ**
GRADE	**7**
SCHOOL	**JACKSON**
TEACHER	**JESSICA HICKEY**

GLENCOE ELEMENTARY SCHOOL

ADDRESS
825 SE 51ST AVE

CONSTRUCTION DATE
1923 (PRIMARY)

LEVELS
2

BLDG AREA
60,094 SF

SITE AREA
252,648 SF
5.8 ACRES

CLASSROOMS COUNT
27

FUNCTIONAL CAPACITY
600 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
1

ZONING
R2.5 RESIDENTIAL 2,500 CU

HISTORICAL SUMMARY

Located in the Mt. Tabor neighborhood of East Portland, the 1923 Glencoe Elementary School consists of a two-story reinforced concrete that exhibits a stucco finish. The Mediterranean Revival building has a U-shaped plan with the auditorium and gymnasiums constructed between the arms that form the U-shape. Glencoe Elementary School is ornamented with simple concrete cornices and belt courses. The primary entrance, located on a central pavilion, is marked by a recessed opening with terra cotta detailing. Other entrances are marked by terra cotta surrounds, pilasters, and pediments. Bands of vinyl windows provide the fenestration. The building is capped by a hip roof with ceramic tile. Double loaded corridors provide access to the administrative offices, classrooms, and recreation spaces. The neighborhood consists of single family residences built primarily between 1920 and 1950. The primary entrance to the facility is from SE 51st Avenue. Play areas and open space occupy the western end of the campus. A rectangular portable classroom with flat roof and T-111 siding is located to the north of the primary school facility.

Glencoe Elementary School does not retain a level of historical integrity commensurate with other Portland Elementary Schools constructed during the same period and is therefore not eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities. Glencoe Elementary has a less diverse student body than many elementary schools and low student poverty rates.

» For the 2021-22 school year, 20% of students are historically underserved; this is below the K-5 school mean (34%).
» For the 2021-22 school year, 11% of students qualified for free or reduced lunch, significantly less than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Glencoe Elementary is forecast at 70% utilization. By the 2030-31 school year, utilization is projected to decline to 66%.

FACILITY CONDITION SUMMARY

Glencoe Elementary School is 98 years old, and in critical condition with a facility condition index (FCI) score of 0.31. As the average FCI score for K-5 schools is 0.18, the building is in significantly worse condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» Plumbing fixtures were aged but operational. The water closet flush valves have been updated with dual-flush handles.
» Blowdown water from the steam boiler system was causing the floor finish to flake in the boiler room. These flakes were getting caught in the floor drain which reportedly causes flooding.
» The roof drains were blocked by debris build-up, which was causing ponding throughout the roof.
» The boilers were original to the facility but had been retrofitted with gas burners in the past five years.

Fire Protection

» The fire protection system appeared to have been renovated and was in good condition with no major deficiencies observed.

Electrical

» There were 13 distribution panels that were original to construction and had exceeded their typical design life. The remaining electrical distribution equipment was in good condition with no major deficiencies observed.

Arch/Struct/Site

» The stucco exterior wall finish was observed to be cracked in numerous locations.
» The flat roof covering was observed to be aged with blisters in various locations on the surface and the skylights were aged beyond typical design life. The sloped ceramic tile roof was observed to be cracked and had many loose, stained, cracked, and dislodged tiles.
» Portable 1 was observed to be generally aged and had varying degrees of deteriorated interior and exterior systems.
» The retaining walls located throughout the site were observed to have cracks throughout.
» The built-up roof covering's top coats had excessive cracking and the roof had areas of blistering typically caused by moisture intrusion.
» The sloped clay tile roof covering had many cracked and missing tiles throughout. The missing tile locations exposed the wood nailers to the elements and were rotting.
» Two of the five roof hatches were made of wood with a sheet metal covering. They had far exceeded typical design life and had aged and loose hardware. One of the wood roof hatches was not locked from below, which causes a safety and security hazard.
» The fiberglass domes on the skylights on the upper and lower roofs had a deteriorated top gel coat and exposed fiberglass mesh, which was also beginning to deteriorate.
» The spectator seating in the auditorium mezzanine had exceeded typical design life, had worn surfaces, and broken and missing seating.

RECENT CAPITAL EXPENDITURES

» Select Flooring Replacements in 2018
» Wireless Upgrades in 2018
» Installation of Climbing Wall in Gym in 2020
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» This school has no designed spaces to provide flexible groupings or differentiated learning activities.
» General classrooms meet approximately 76% of the size standard.
» No elevator is present.
» The school lacks purposely designed special education spaces.
» The music room is slightly undersized (85% of standard) with acoustical issues.

- There are two PE spaces: the gym and a second space also used for “indoor recess.”
- The performing arts space is also the cafeteria. The room has both a main floor and a balcony area with fixed seating. An undersized stage is also present.
- A small art room is present.
- The cafeteria is adequately sized, but the kitchen is small. Acoustical treatments are needed in the cafeteria.
- The main entrance lacks a buzzer or camera and the main office does not have active supervision of the door.
- The campus lacks drop-off lanes; all vehicle and bus access is along the street.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS’ All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district’s Educational Specifications.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district’s Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

GROUT ELEMENTARY SCHOOL

ADDRESS
3119 SE HOLGATE BLVD

CONSTRUCTION DATE
1927 (PRIMARY)

LEVELS
3

BLDG AREA
73,066 SF

SITE AREA
101,930 SF
2.34 ACRES

CLASSROOMS COUNT
27

FUNCTIONAL CAPACITY
510 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

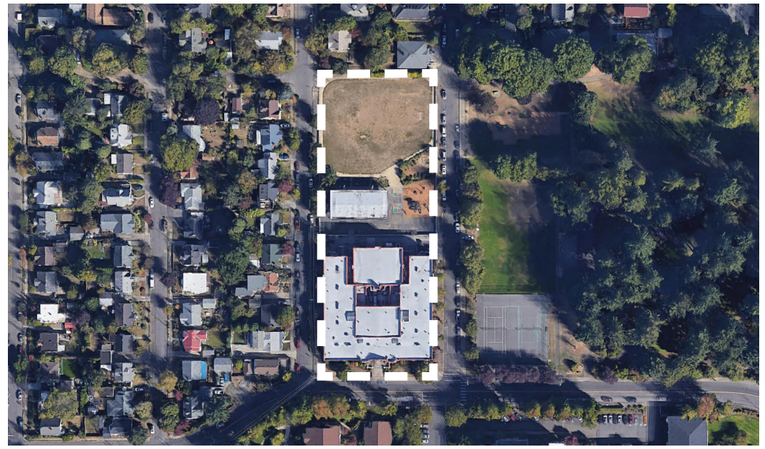

HISTORICAL SUMMARY

The two-story school building is situated at the south corner of the parcel in the Creston-Kenilworth neighborhood of Southeast Portland. The reinforced concrete structure, faced in red brick rests on a poured concrete foundation. The flat roof is covered in asphalt roofing material. Variations in the brick work including the utilization of bands of soldier courses and sloping brick window sills, provides additional relief on the long elevations.

The Creston-Kelinworth neighborhood of southeast Portland is comprised primarily of single family residences built between 1928-1960. An asphalt-covered parking lot is located to the north of the building. Asphalt-covered play areas and several play fields occupy the north end of the parcel. The property does not contain any other ancillary buildings.

Grout Elementary School retains a high degree of integrity and is therefore eligible for the National Register of Historic Places under Criterion A as an example of school planning and development of the Creston-Kenilworth neighborhood. The school is also eligible under Criterion C as an example of the work of George Jones in the Mediterranean style.

RESJ CONSIDERATIONS

Grout Elementary School has attributes that place it in a moderately high priority category for facility improvements that would advance the district’s racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 25% of students are historically underserved, below the K-5 school mean (34%).
- For the 2021-22 school year, 32% of students qualified for free or reduced lunch; this is above the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Grout Elementary is forecast at 71% utilization. Utilization is projected to

increase slightly to 73% by 2030-31.

FACILITY CONDITION SUMMARY

Grout Elementary School is 94 years old, and in poor condition with a facility condition index (FCI) score of 0.28. As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly worse condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The roof drains were blocked by debris build-up which was causing ponding in some areas. The building reportedly has had multiple instances of domestic water pipe failure.
- The classroom unit ventilators were replaced in the 1980s, but the majority of the remaining HVAC equipment was original to facility construction.
- The urinals had exceeded typical design life and were corroded.

Fire Protection

- The school had a wet pipe sprinkler system that served the entire building.
- The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

- The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- The roof covering was moderately deteriorated with ponding occurring throughout.
- The boys restroom on the main floor had daylight coming through a fist-sized hole in the ceiling indicating a hole in the roofing.
- Many of the student lockers were dented and the paint was worn and chipped.
- The carpet was worn and bunching in several classrooms.
- The laminated wood flooring had water damage in the cafeteria and some delamination occurring in a couple areas.

RECENT CAPITAL EXPENDITURES

- Play structure Replacement in 2018
- Boiler Reinsulate in 2018
- Fire Alarm Upgrades in 2019
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- Classroom sizes are 71% of the standard. Flexible learning areas are very limited.
- Finishes are worn and dated.
- Special education classrooms are undersized (76% of standard) and not located near supportive areas.
- No dedicated music room is present.
- A general classroom has been converted into a small art room (58% of size standard).
- The gym is 36% of the recommended standard.
- Aesthetically striking performing arts spaces is provided with a small stage.
- The library media center is an inviting and creative space, but somewhat small (80% of size standard).
- The cafeteria, kitchen and servery are well-placed but undersized.
- No visibility of controlled entry point to allow for monitoring of the main entry by office staff.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

HAYHURST ELEMENTARY SCHOOL

ADDRESS
5037 SW IOWA ST

CONSTRUCTION DATE
1954 (PRIMARY)

LEVELS
2

BLDG AREA
50,314 SF

SITE AREA
323,215 SF
7.42 ACRES

CLASSROOMS COUNT
23

FUNCTIONAL CAPACITY
546 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
0

ZONING
R7 RESIDENTIAL 7,000 CU

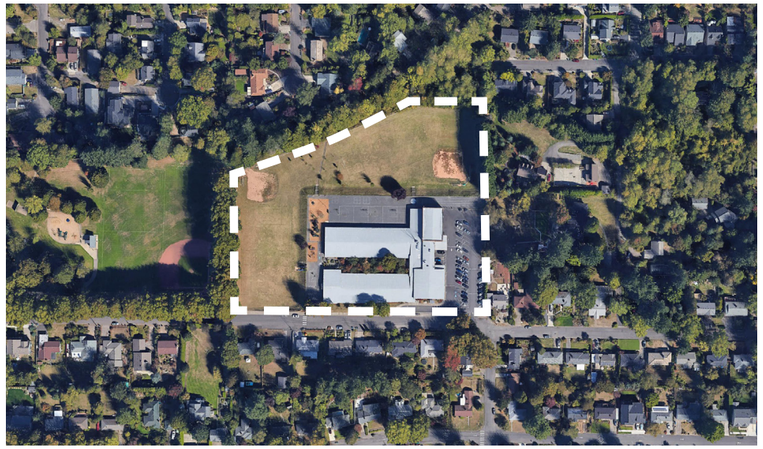

HISTORICAL SUMMARY

The primary school building is immediately surrounded by playgrounds and an asphalt-covered parking lot. Situated at the crest of a hill, several play fields associated with Pendleton Park are located on a terrace to the west of the school building. The U-shaped, finger plan type school incorporates an interior garden to provide maximum light and ventilation to the classrooms. Both variegated brick and board-and- batten siding cover the exterior of the building. A moderately pitched gable roof covers the Northwest Regional style building. Fenestration consists of grouped wood frame windows.

Hayhurst Elementary School in Southwest Portland. The school's campus is located at the northeast corner of Pendleton Park. Development in the neighborhood consists primarily of large-lot, single family residences built between 1950 and 2000.

A good example of the finger plan type school that retains its integrity with its floor plan and many exterior and interior finishes intact, Hayhurst Elementary School is recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Hayhurst serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 21% of students are historically underserved, well below the K-5 school mean (34%).
» For the 2020-21 school year, 20% of students qualified for free or reduced lunch, well below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Hayhurst Elementary is forecast at 72% utilization. By the 2030-31 school year, utilization is projected to decrease to 64%.

FACILITY CONDITION SUMMARY

Hayhurst Elementary School is 67 years old, and in poor condition with a facility condition index (FCI) score of 0.21. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» There were abandoned plumbing fixtures in the gym and in the restroom between classrooms 7 and 8. Rodents have reportedly entered the building through the water closet in the classroom restroom.
» The boilers were original to the facility but had been retrofitted with gas burners within the past five years.

Fire Protection

» The fire protection system appeared to have been renovated and was in good condition with no major deficiencies observed.

Electrical

» There were approximately 10 panel boards that were original to facility construction. These panel boards were produced by Federal Electric Products and utilized Stab-Lok breakers. These breakers are known to not trip properly when overloaded, leading to a potential fire hazard.

Arch/Struct/Site

» The building envelope was observed to be in good to average condition given the age of the building. No immediate deficiencies were observed.
» What appeared to be original metal toilet partitions had exceeded typical design life, had excessive wear, and had been retrofitted with pieces of newer partition components.
» The painted concrete floor finish in the kitchen and mechanical/ boiler room was heavily worn. In several areas in the mechanical room, the paint had completely worn away to bare concrete.
» The roof hatch opened toward an approximate 4-5 ft drop-off with no railing or caution striping.

RECENT CAPITAL EXPENDITURES

» Lead Paint Abatement in 2017
» Installation of Climbing Wall in Gym in 2019
» Seismic Upgrades in 2019

EDUCATIONAL SUITABILITY

» The school has no designated spaces to support flexible groupings and different learning styles.
» Two SPED rooms are present. They have poor acoustical separation and lack access to an adjacent ADA restroom.
» The school does not have a dedicated music room.
» An art room / makerspace is provided, as well as a kiln.
» A cafeteria with a stage is present. The kitchen and servery are undersized.
» The gym is undersized (68% of size standard).
» The front door has no active control or supervision and no security vestibule.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

IRVINGTON ELEMENTARY SCHOOL

ADDRESS
1320 NE BRAZEE ST

CONSTRUCTION DATE
1932 (PRIMARY)

LEVELS
2

BLDG AREA
59,874 SF

SITE AREA
150,282 SF
3.45 ACRES

CLASSROOMS COUNT
31

FUNCTIONAL CAPACITY
547 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
0

ZONING
OS OPEN SPACE CU

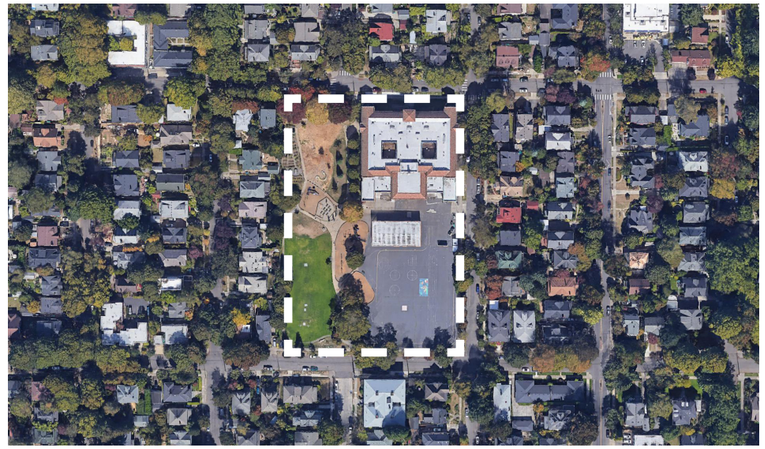

HISTORICAL SUMMARY

The two story school building is situated at the northeast corner of the parcel. The reinforced concrete structure, faced in sand colored brick, rests on a poured concrete foundation. Designed in the Mediterranean Revival style, the gable roof is clad in red pantiles. Terra cotta embellishments include decorative panels, label moldings, quoins at the entry, and arched openings at the entries. Fenestration consists of a mixture of metal frame and multi-light wood frame windows.

The school is centered in the Irvington neighborhood of Northeast Portland. The neighborhood is comprised primarily of single family residences built between 1900-1950. A covered play shed and asphalt playground are located at the southeast corner of the campus. The west side of the campus features play equipment, an outdoor stage, and a community garden.

Irvington Elementary School is a good example of the schools designed by George Jones during his tenure as PPS Superintendent of Building. The only school built by Portland Public Schools during the Depression, the school is an important example of community development during the period. In comparison with other Portland schools developed during the same period and constructed of similar styles, Irvington Elementary School retains a high degree of integrity and is therefore eligible for the National Register of Historic Places under Criterion A.

RESJ CONSIDERATIONS

Irvington Elementary School has a moderately diverse student population with lower student poverty levels.

- For the 2021-22 school year, 30% of students are historically underserved, slightly below the K-5 school mean (34%).
- For the 2021-22 school year, 20% of students qualified for free or reduced lunch, below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Irvington Elementary School is forecast at 58% utilization. Utilization is project to remain steady at 58% through 2030-31.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Irvington Elementary School is 89 years old, and in poor condition with a facility condition index (FCI) score of 0.28. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the HVAC system had exceeded its typical design life. The boilers were aged; however, their burners were retrofitted to natural gas in 2012. The condensate pump package was corroded and degraded; the boiler feed water package was corroded and had signs of leaks. Most of the facility was conditioned by air handling units with heating coils as well as fin tube radiators. The supply air fan serving the classrooms made excessive noise during the time of assessment and required preventative maintenance. Unit ventilators were observed in classrooms 100, 101, 110 and 111.
» The facility had two water heaters located in Room 99. One of the water heaters was replaced in 2019 and was in excellent condition. The other water heater was installed in 2005 and had exceeded its typical design life.
» The plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles. A water cooler in this facility had signage stating that a lead hazard was present

Fire Protection

» The fire alarm control panel and fire alarm devices had recently been replaced and had no major deficiencies observed or reported.
» No fire suppression system was observed in the facility.

Electrical

» The majority of the electrical distribution system, including the main switchboard, went through a full replacement in 1989; the system had exceeded its typical design life. The panel boards supporting the IT systems were the only exception as these panels were installed in 1998. It appeared that the majority of the lighting was also replaced around the 1989 electrical renovation; this system had also exceeded its typical design life with the exception of some new exterior LED lights and some interior exit lighting.

Arch/Struct/Site

» The roof was significantly cracked, and the skylights were beyond design life.
» There were leaks in the boiler room and storage area. Staff reported that the source of the water may be from the adjacent playground hard surface.
» Staff reported the flagpole was hit by a truck and not replaced.

RECENT CAPITAL EXPENDITURES

» Concrete Stairs Repair in 2018
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» Educational suitability information was unavailable for this site.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the District's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

JAMES JOHN ELEMENTARY SCHOOL

ADDRESS
7439 N CHARLESTON AVE

CONSTRUCTION DATE
1929 (PRIMARY)

LEVELS
2

BLDG AREA
64,285 SF

SITE AREA
144,184 SF
3.31 ACRES

CLASSROOMS COUNT
27

FUNCTIONAL CAPACITY
513 STUDENTS

CLUSTER
ROOSEVELT

MODULAR CLASSROOMS
0

ZONING
R1 RESIDENTIAL 1,000 CU
CM2 COMMERCIAL MIXED USE 2

HISTORICAL SUMMARY

James John Elementary School is a two story reinforced concrete building with brick veneer. The campus consists of a U-shaped building, a portable, and a play shed. Constructed in 1929, the school exhibits extensive use of cast-stone ornamentation to express its Classical Revival style.

The school features a central projecting bay and bay windows. Symmetrically arranged aluminum windows provide the fenestration. The middle bay of the front façade projects slightly from the rest of the building. The bay is trimmed with a dentil cornice, cast-stone quoins, and a decorative panel bearing the school's name. The main portals, located at the sides of the bay, are accented with Tuscan columns and a portico topped by an entablature. These classical elements, in addition to the building's symmetrical plan and fenestration, serve to reinforce the ideals of order, balance, and formality.

The North Portland neighborhood consists of a mixture of single family residences, multi-story apartments, and commercial buildings built primarily between 1920 and 1950. The James John Elementary School campus occupies three city blocks and the vacated Kellogg Street/ John Street right-of-way; the school is located on the northeast end of the campus and play areas and open space are on the south and west ends of the campus. A 1944 portable building and 1978 play shed are located to the west of the primary building.

The 1929 Classical Revival school is recommended as eligible for the National Register of Historic Places (NRHP) as a strong example of the principles that characterized the design of schools during this era (Criterion A).

RESJ CONSIDERATIONS

James John Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 53% of students are historically underserved, greater than the K-5 school mean (34%).
- For the 2020-21 school year, 36% of students qualified for free or reduced lunch, significantly more than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, James John School is forecast at 68% utilization. By the 2030-31 school year, utilization is projected to decrease to 64%.

FACILITY CONDITION SUMMARY

James John Elementary School is 92 years old, and in fair condition with a facility condition index (FCI) score of 0.1. As the average FCI score for K-5 schools in PPS is 0.18, the building is in better condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- Multiple roof drains were blocked by debris and vegetation.
- The rooftop exhaust fans were replaced in 2014 and the majority of the remaining HVAC equipment was original to facility construction.
- The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping

Fire Protection

- The building did not have a fire suppression system.
- The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

- The office staff do not have access to the security camera feed. They reported they lost access after the camera system was upgraded.
- The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- In the gym, the recently repaired wood floor was already delaminated, splitting and water damaged.
- In the west addition, the wood floor in the hallways was delaminating and separating.
- The exterior wood doors and windows on the west addition were heavily weathered and worn.
- The majority of the exterior and interior building components were well maintained, but beyond typical design life.
- The exterior window frames in the portable were weathered and cracking.

RECENT CAPITAL EXPENDITURES

- Reinsulated Boiler in 2018
- Playground Replacement in 2018
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- There are few designed spaces to support differentiated learning or flexible groupings.
- General classrooms vary in size, but typically meet approximately 68% of the size standard.
- The SPED classroom is undersized, dimly lit, and lacks a sink, restroom and changing table.
- A music room is not present.
- A small art room is provided (65% of size standard).
- The gym has poor acoustics and only meets approximately 59% of the size standard.
- The performing arts space maintains an inviting and stimulating environment with fixed seating.
- The library media center is centrally located but only meets approximately 72% of the size standard.
- The campus lacks drop-off lanes; all vehicle and bus access is along the street.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security /

alarm system.

- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

KELLY ELEMENTARY SCHOOL

ADDRESS
9030 SE COOPER ST

CONSTRUCTION DATE
1952 (PRIMARY)

LEVELS
1

BLDG AREA
77,995 SF

SITE AREA
400,316 SF
9.19 ACRES

CLASSROOMS COUNT
38

FUNCTIONAL CAPACITY
670 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Kelly Elementary School is located in Southeast Portland. The campus consists of the primary school building built in 1952 with additional wings added in 1958, a detached portable classroom built in 1969, and a detached L-shaped building built in 1969. The finger plan type school incorporates an interior garden to provide maximum light and ventilation to the classrooms. The single story building rests on a poured concrete foundation. Cladding on the wood frame building consists of a mixture of brick, board-and-batten, and stone. Moderately sloped butterfly and shed roofs cover the irregular mass of the building. Fenestration consists of grouped metal frame windows.

The school's campus is located at the southeast corner of Glenwood Park. Development in the neighborhood consists primarily of single family residences built between 1950-2000. The campus includes asphalt covered parking and play areas surrounding the school buildings. Play fields occupy the northwest portion of the parcel.

A good example of the finger plan type school that retains its integrity with its floor plan and many exterior and interior finishes intact, Kelly Elementary School is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Kelly Elementary School has attributes that place it in a moderately high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 34% of students are historically underserved, slightly below the K-5 school mean (34%).
- For the 2021-22 school year, 46% of students qualified for free or reduced lunch, significantly more than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Kelly

Elementary is forecast at 68% utilization. By the 2030-31 school year, utilization is projected to decline slightly to 67%.

FACILITY CONDITION SUMMARY

Kelly Elementary School is 69 years old, and in poor condition with a facility condition index (FCI) score of 0.24. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The water heater serving the kitchen and the water heater serving the building had both exceeded their typical design lives.
» Most of the HVAC equipment was original to the facility's construction in 1961 and had exceeded its typical design life.

Fire Protection

» The facility did not have a fire suppression system.

Electrical

» The site's service entrance equipment and a portion of the electrical system's interior distribution was replaced in 1998. However, most of the site's distribution panels and the lighting in the main facility had exceeded their typical design lives.

Arch/Struct/Site

» There was moderate ponding occurring across the roof covering. The coating on the roof covering was heavily deteriorated and cracking throughout. There were many leaks reported, and recent patching failed to address the issues.
» There was a one-foot size hole in the wood panel exterior wall at the east mezzanine fan room, and the rest of the panels were heavily weathered, splintering and flaking paint.
» Leaks were reported in the roof covering on the covered play area canopy.
» The caulk had crumbled away from most of the exterior window frames, and some of the frame caps were loose or had been drilled through multiple times.
» Many of the interior finishes had exceeded their typical design lives, such as ACT ceiling tiles, vinyl tile flooring and ceramic tile floor and wall coverings.
» The wood flooring in the gym was becoming delaminated.

RECENT CAPITAL EXPENDITURES

» Play Structure Addition in 2018
» Courtyard Improvements in 2017
» Radon Mitigation in 2018
» Drinking Fountain Fixture Replacements in 2020
» Seismic Strengthened Roof in 2020

EDUCATIONAL SUITABILITY

» Both the main building and the Annex lack designed spaces to support differentiated learning. Few spaces can accommodate flexible groupings.
» Fixtures and finishes are worn and dated.
» Some general classrooms have carpet, rather than sink/wet area flooring.
» There are several rooms in the Annex used for Head Start. Only one room meets the size standard. The other rooms meet approximately 60% of the standard.
» Special education classrooms are undersized (76% of size standard) and not located near supportive areas.
» The music room is in a large, stand-alone building not connected to the main school building.
» The art room meets approximately 68% of the size standard. There is no separate room for the kiln.
» The gym meets approximately 70% of the size standard.
» The library is located at the end of a hall of classrooms. It is impacted by playground noise.
» The food service area is small for the enrollment and number of daily meals served. Some equipment is stored/serviced in the cafeteria.
» Although the office in the main building is located near the entrance, it lacks visual or active supervision of the door. There is no security vestibule, no buzzer or camera at the entrance.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

» Expand, relocate and/or re-purpose pre-k classroom space to support effective early childhood instruction and programming.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

LEE ELEMENTARY SCHOOL

ADDRESS
2222 NE 92ND AVE

CONSTRUCTION DATE
1953 (PRIMARY)

LEVELS
1

BLDG AREA
63,170 SF

SITE AREA
396,396 SF
9.1 ACRES

CLASSROOMS COUNT
25

FUNCTIONAL CAPACITY
443 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
1

ZONING
R5 RESIDENTIAL 5,000 CU

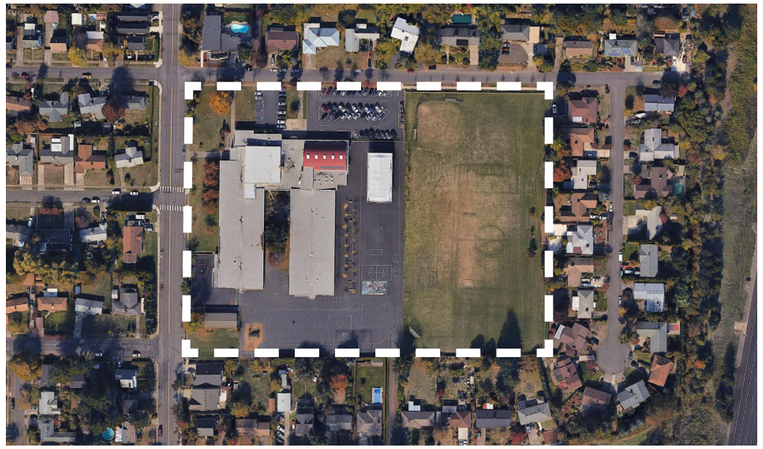

HISTORICAL SUMMARY

Lee Elementary School is situated in a primarily residential neighborhood in Northeast Portland. Facilities on the grass and asphalt-covered campus include the U-shaped school building and a covered playshed. Built in 1953, the International style school building is clad in red brick. The one-story building sits on a poured concrete foundation. The wings that comprise the U-shaped plan are covered with a mixture of shed and flat roofs. The school provides facilities for classrooms, a gymnasium, a cafetorium, a library, and an administrative office. Entry to the school is from the west on NE 92nd Street. The playground, playfields, and a covered play shed are located directly south and east of the school. The parking area is located directly north of the building.

A good example of the finger plan type school in the International style that exhibits a high degree of integrity with its floor plan, cladding, and many interior finishes intact, Jason Lee Elementary School is recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Lee Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 44% of students are historically underserved, well above the K-5 school mean (34%).
- For the 2021-22 school year, 40% of students qualified for free or reduced lunch, significantly higher than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Lee Elementary is forecast at 60% utilization. By the 2030-31 school year, utilization is projected to decrease to 56%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Lee Elementary School is 68 years old, and in poor condition with a facility condition index (FCI) score of 0.16 As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
- The facility's water heater, located in Room 125, had exceeded its typical design life.
- The main facility's boilers were original to the facility but had been retrofitted with gas burners in 2012.
- Six PACE ventilation units were observed throughout the facility and had exceeded their typical design lives.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and did not have any major deficiencies observed or reported.
- The facility did not have a fire suppression system.

Electrical

- While several panel boards were recently installed or replaced, including the 1000 amp main distribution panel and several panels supporting the IT equipment, the majority of the electrical distribution equipment had exceeded its typical design life.
- The exterior lighting had been upgraded to LED or CFL fixtures, but the majority of the interior lighting had exceeded its typical design life.

Arch/Struct/Site

- There was cracking and signs of water intrusion on the store room basement walls.
- The exterior wood walls at the roof elevation were deteriorated.
- The gymnasium floor was nearing its end of its design life.
- The exterior wood siding of the covered play area structure was deteriorated.
- Dated and worn finishes throughout the building.
- There is no restroom in the SPED communication behavior classroom. There is a changing table, but it is located in a restroom on the other side of the building.
- The art and music rooms are both undersized.
- The gym is 78% of the size standard
- The stage adjacent to the multipurpose room is undersized.
- The library media center is located in two conjoined classrooms (with an open divider curtain).
- The main entrance doors cannot be remotely controlled by the main office.

RECENT CAPITAL EXPENDITURES

- Roof Repairs in 2018
- Parking Lot Restriping in 2018
- Security Upgrades (Fencing) in 2019
- Playground Expansion for Head Start in 2019
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- There are few spaces that allow for flexible, differentiated instruction.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating

options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

LENT ELEMENTARY SCHOOL

ADDRESS
5105 SE 97TH AVE

CONSTRUCTION DATE
1949 (PRIMARY)

LEVELS
1

BLDG AREA
78,100 SF

SITE AREA
468,270 SF
10.75 ACRES

CLASSROOMS COUNT
32

FUNCTIONAL CAPACITY
707 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
3

ZONING
R5 RESIDENTIAL 5,000 CU
OS OPEN SPACE CU

HISTORICAL SUMMARY

Situated in the Lents neighborhood of east Portland, the Oliver P. Lent Elementary School campus consists of primary classroom building, an annex, and two portable buildings. The primary building is a single story brick structure ornamented by detailed brick work and roofs clad in copper panels. Aluminum frame windows provide the fenestration. Double loaded corridors provide access to the classroom wings that are located at the north and south wings of the building.

The neighborhood consists of a mixture of single family residences built primarily between 1950 and 2000. The primary entrance to the facility is from SE 97th Street. Play areas and an open space that occupy the western edge of the campus provide a buffer between the school and Interstate 205. Although Lent Elementary School retains excellent integrity with its floor plan and many exterior and interior finishes intact, it is not recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Lent Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 65% of students are historically underserved, much higher than the K-5 school mean (34%).
» For the 2021-22 school year, 46% of students qualified for free or reduced lunch, significantly higher than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Lent Elementary is forecast at 43% utilization. By the 2030-31 school year, utilization is projected to decrease to 41%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Lee Elementary School is 72 years old, and in poor condition with a facility condition index (FCI) score of 0.28. As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly worse condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The remaining equipment was original to facility construction.
- The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

- The school had a wet pipe sprinkler system that served the entire building.
- The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

- The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- Moderate cracking was occurring in the south exterior concrete wall.
- One roof hatch was tearing at its hinge. Moderate surface corrosion was present on both roof hatches.
- Multiple concrete exterior stairs had cracks or were crumbling or broken.
- The VCT in the cafeteria was coming loose in spots, with stress cracking in many of the tiles.
- The wood floor was delaminating throughout the cafeteria and gymnasiums.
- There was a major crack in the southwest retaining wall.

RECENT CAPITAL EXPENDITURES

- Select Carpet Replacements in 2018
- Wireless Upgrades in 2019
- Fire Alarm Upgrades in 2019
- Drinking Fountain Fixture Replacements in 2020
- Roof Design for SRGP Grant in 2020

EDUCATIONAL SUITABILITY

- General classrooms are appropriately sized.
- The finishes are worn and dated throughout the building.
- The school lacks purposely designed special education spaces.
- The science classrooms are converted general classrooms.
- Music is taught in a portable classroom.
- A dedicated art room is present. The space is somewhat undersized (82% of size standard).
- The gym is small (70% of size standard), dated, and lacking acoustical treatments.
- The library media center is significantly undersized (52% of size standard).
- There is no line of sight from the main office to the main entrance (even though office is positioned relatively closely).

EDUCATIONAL PROGRAM FORECAST

High Priority

- Add or re-purpose space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners.
- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications. Music is currently taught in a portable classroom.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

LEWIS ELEMENTARY SCHOOL

ADDRESS
4401 SE EVERGREEN ST

CONSTRUCTION DATE
1952 (PRIMARY)

LEVELS
1

BLDG AREA
47,389 SF

SITE AREA
237,402 SF
5.45 ACRES

CLASSROOMS COUNT
20

FUNCTIONAL CAPACITY
444 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Woodstock neighborhood of Southeast Portland, Meriwether Lewis Elementary School occupies the northwest portion of the campus. The primary entrance to the campus is from the south on SE Evergreen Street. The L-shaped wood frame building features a variety of cladding including brick veneer, tongue-and-groove wood, and concrete block. The single story building rests on a poured concrete foundation. The wings of the building are clad in a variety of intersecting shed and shallow pitched gable roofs. Fenestration consists of grouped metal and wood frame windows.

Development in the vicinity of the school consists of a mixture of single family residence, larger multi-family residential buildings, and commercial buildings. Asphalt covered play areas are located on the southeast side of the campus. The campus features notable gardens located along its northwest and south east elevations, developed through community partnerships that provide opportunities for environmental education.

Although Lewis Elementary School retains its integrity with its floor plan and many exterior and interior finishes intact, it is not recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Lewis serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2019-20 school year, 15% of students are historically underserved, well below the K-5 school mean (34%).
» For the 2020-21 school year, 15% of students qualified for free or reduced lunch, well below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Meriwether Lewis Elementary is forecast at 90% utilization. By the 2030-31 school year, utilization is projected to decrease to 82%.

FACILITY CONDITION SUMMARY

Lewis Elementary School is 69 years old, and in poor condition with a facility condition index (FCI) score of 0.2. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The classrooms in the north addition were experiencing temperature control issues at the time of the assessment. Staff reported classrooms reaching temperatures of 80 degrees Fahrenheit.
» The plumbing fixtures were aged but operational. The water closet flush valves had been updated with dual-flush handles.
» The boilers were original to the facility and reportedly have constant issues with piping leaks.
» The urinals had exceeded typical design life and were corroded. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

» The school had a wet pipe sprinkler system that served the entire building.
» The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

» The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

» Cracking was noted in the exterior brick wall around the gym.
» In the north addition, wood frames were moderately weathered with some cracking caulk and paint. Several cracked window panes were noted.
» In the north addition, exterior metal doors were heavily dented with some minor surface corrosion.
» Most of the wood window frames were heavily weathered with flaking paint.

RECENT CAPITAL EXPENDITURES

» Repaved and Replaced Catch Basin on Site Grounds in 2018
» Seismic Retrofit in 2018

EDUCATIONAL SUITABILITY

» Most general classrooms are sufficiently sized. There are some areas to accommodate flexible learning activities. The kindergarten classrooms are undersized (73% of standard).
» The SPED classroom is undersized and lacks an adjacent ADA restroom.
» The library media center is greatly undersized (63% of standard).
» No art room is present.
» The school has a small dedicated music room.
» The gym is greatly undersized (66% of standard).
» The cafeteria is undersized and lacks natural light.
» The office does not have remote control of the main entry doors.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.

- » Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- » Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- » Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- » Re-purpose an existing space into a wellness room.
- » Allocate an area for a Reconnection Services office.
- » Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- » Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- » Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- » Expand P.E. storage by repurposing space and/or adding casework.
- » Allocate instructional, office, and meeting space for Virtual Scholars.

LLEWELLYN ELEMENTARY SCHOOL

ADDRESS
6301 SE 14TH AVE

CONSTRUCTION DATE
1928 (PRIMARY)

LEVELS
2

BLDG AREA
52,204 SF

SITE AREA
143,312 SF
3.29 ACRES

CLASSROOMS COUNT
24

FUNCTIONAL CAPACITY
528 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
3

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Llewellyn Elementary School is situated in the Moreland neighborhood of Southeast Portland. Aligned on a north south axis, the two-story school building is situated at the east side of the campus. In addition to the main school building, the campus has a portable classroom located at its northwest corner and covered play structure at the southeast end. The reinforced concrete building, faced with a pale brown brick, rests on a poured concrete foundation. A flat roof with a parapet covers the rectangular building. Designed with Mediterranean Revival style components, cast stone is utilized as architectural ornament throughout the exterior elevations. Fenestration consists of a mixture of grouped metal frame and wood frame windows.

Development in the surrounding neighborhood consists primarily of single family residences. Much of the neighborhood had been developed by the 1920s but the area continued to experience growth through the 1950s. Asphalt covered play areas are situated at the west and south sides of the building. Grass covered play fields are located at the south end of the campus.

Llewellyn Elementary School does not retain a level of historical significance and integrity commensurate with other Portland Elementary Schools constructed of similar styles during the same period and is therefore not eligible for the National Register of Historic Places.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Llewellyn serves a less diverse student population with relatively low poverty levels compared to the district average.

- » For the 2021-22 school year, 16% of students are historically underserved, well below the K-5 school mean (34%).
- » For the 2021-22 school year, 7% of students qualified for free or reduced lunch, significantly less

than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Llewellyn Elementary is forecast at 93% utilization. By the 2030-31 school year, utilization is projected to decrease to 88%.

FACILITY CONDITION SUMMARY

Llewellyn Elementary School is 93 years old, and in critical condition with a facility condition index (FCI) score of 0.4. As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly worse condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The remaining equipment was original to facility construction.
- The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

- The school had a wet pipe sprinkler system that served the entire building.
- The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

- The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- Moderate cracking was occurring in the south exterior concrete wall.
- One roof hatch was tearing at its hinge. Moderate surface corrosion was present on both roof hatches.
- Multiple concrete exterior stairs had cracks or were crumbling or broken.
- The VCT in the cafeteria was coming loose in spots, with stress cracking in many of the tiles.
- The wood floor was delaminating throughout the cafeteria and gymnasiums.
- There was a major crack in the southwest retaining wall.

RECENT CAPITAL EXPENDITURES

- Restroom Door Replacements in 2018
- Select Flooring Replacements in 2018
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- Most classrooms are approximately 70% of size standard and do not support flexible learning.
- The music room is located in a portable classroom.
- The school does not have an art classroom.
- The gym is greatly undersized (54% of standard).
- Finishes are worn and dated.
- No nurse's office is present.
- There is no security vestibule at the main entry.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications. Music is currently held in a portable classroom.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the District's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

MAPLEWOOD ELEMENTARY SCHOOL

ADDRESS
7452 SW 52ND AVE

CONSTRUCTION DATE
1948 (PRIMARY)

LEVELS
2

BLDG AREA
40,636 SF

SITE AREA
187,308 SF
4.3 ACRES

CLASSROOMS COUNT
21

FUNCTIONAL CAPACITY
467 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
6

ZONING
R7 RESIDENTIAL 7,000 CU

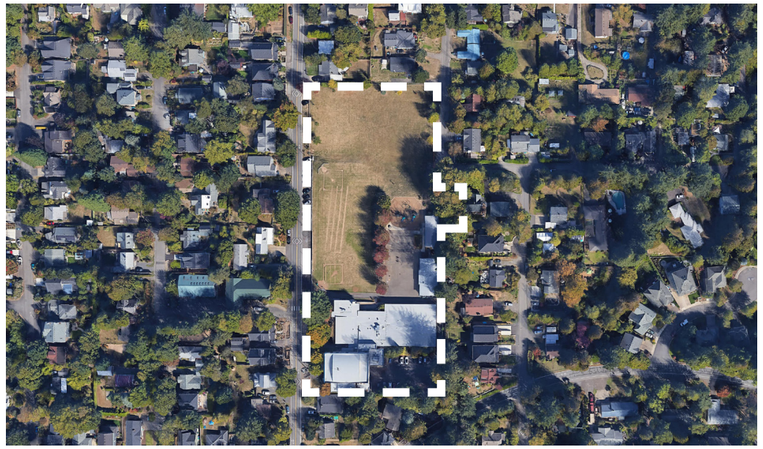

HISTORICAL SUMMARY

Maplewood Elementary School is located in Southwest Portland. The campus consists of the primary school building built in 1945 with additional wings added in 1953 and 1954 and a detached portable classroom built in 1961. The school expresses a modest inspiration from the Streamline Moderne style and rests on a poured concrete foundation. Cladding on the wood frame building consists of a mixture of brick, glass block, horizontal board, concrete panels, and board and batten. With the exception of the barrel vault that covers the two story gymnasium wing, the mass of the single story school is covered by a flat roof. Fenestration consists of grouped metal frame windows.

Development in the neighborhood consists primarily of single family residences on large parcels of land built between 1950 and 2000. Asphalt covered parking and play areas surround the school buildings. Play fields occupy the northwest portion of the parcel.

Maplewood Elementary School lacks integrity due to the extensive and incompatible additions and alterations and resulting lack of coherent building vocabulary, therefore, it is not eligible for the NRHP.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Maplewood serves a less diverse student population with relatively low poverty levels compared to the district average.

- For the 2021-22 school year, 13% of students are historically underserved well below the K-5 school mean (34%).
- For the 2021-22 school year, 10% of students qualified for free or reduced lunch, significantly less than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Maplewood Elementary is forecast at 77% utilization. By the 2030-31 school year, utilization is projected to decrease to 72%.

FACILITY CONDITION SUMMARY

Maplewood Elementary School is 73 years old, and in poor condition with a facility condition index (FCI) score of 0.28. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of domestic water equipment was replaced in 2019 and observed to be in good condition.
- The drains on the roof area above the elevator shaft were blocked by debris build-up which was causing ponding.
- The boiler was original to the facility but had been retrofitted with a gas burner within the past five years.

Fire Protection

- The fire protection system appeared to have been renovated around 2018 and was in good condition with no major deficiencies observed.

Electrical

- There were four distribution panels that were original to construction and had exceeded their typical design life. The remaining electrical distribution equipment was in good condition with no major deficiencies observed.

Arch/Struct/Site

- The site was experiencing poor drainage (especially at the paved play area) due to a broken drainage pipe or an obstruction. Hazard cones have to be set up to keep the students away from the affected areas. Some of the drainage inlets around the site were observed to be clogged with debris and grass.
- Portable 1 was observed to be in average to poor condition with aged and deteriorated interior finishes and aged exterior windows.
- A new portable building (Portable 3) was recently installed at the site in the summer of 2019.
- The exterior metal and wood windows were observed to be in poor condition. The frames were corroded, rotted, and deteriorated.
- The exterior glass block and Masonite panel walls were observed to be aged and deteriorated. Some of the glass blocks were cracked and the Masonite panels were chipped, cracked, and deteriorated at the south and west elevations near the gym.
- The roof hatches had deteriorated and corroding surfaces, worn seals, and broken and missing hardware.
- The attic access door had a missing latch, hardware that made it difficult to open the door, and weak springs that would allow the door to swing down freely causing a life safety hazard to a person trying to open the access door from the wall mounted ladder.
- The VCT in the office addition was heavily cracked throughout.
- The carpet throughout was heavily worn and had excessive staining in high traffic areas. Damaged carpet transitions to vinyl tile had been taped with duct tape causing a trip hazard.
- The painted concrete and sealed concrete surfaces throughout were heavily worn and had areas of wear showing bare concrete.
- The non-slip rubber sheet flooring on a corridor ramp was heavily worn down which decreased its slip resistance and caused a possible slip hazard.

RECENT CAPITAL EXPENDITURES

- Installation of Modular Classroom in 2019.
- Drinking Fountain Fixture Replacements in 2021.

EDUCATIONAL SUITABILITY

- There are limited spaces for small group instruction.
- The school lacks purposely designed special education spaces.
- The school lacks a dedicated music room.
- An undersized art room is provided; however, the space is poorly configured and not well-ventilated.
- The physical education space is a shared space with the auditorium and is located on the second floor of the school making access challenging. The space is undersized (77% of

space standard)
» The library / media center meets 62% of the required size standard..
» The basement-level cafeteria/ kitchen are undersized.
» There is no separation between vehicle, pedestrian, and bus traffic creating a significant safety hazard.
» There is no single controlled access point for entrance into the building.

.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

MARKHAM ELEMENTARY SCHOOL

ADDRESS
10531 SW CAPITOL HWY

CONSTRUCTION DATE
1951 (PRIMARY)

LEVELS
1

BLDG AREA
79,714 SF

SITE AREA
399,881 SF
9.18 ACRES

CLASSROOMS COUNT
27

FUNCTIONAL CAPACITY
588 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
0

ZONING
R2 RESIDENTIAL 2,000 CU
CM2 COMMERCIAL MIXED USE 2

HISTORICAL SUMMARY

Markham Elementary School is situated in a residential neighborhood of Southwest Portland. Built in 1951, the Colonial Revival style school building is situated on a mostly grass-covered campus which includes a grass-covered commons in front of the main entrance. The modified H-shaped building has a wood frame clad with red brick which sits on a poured concrete foundation. The single story building is covered by gable roofs. The school building houses classrooms, an auditorium, a gymnasium, a media center/library, a cafeteria, and an administrative office. Playfields are located at the rear and to the west of the school. An asphalt- covered half-circular driveway is located in front of the northeast wing (Cafeteria). Parking areas are situated at the southeast corner of the property off Capitol Way, and another at the rear of the school.

Markham Elementary School retains excellent integrity with its floor plan, cladding, fenestration, and many interior finishes intact. The school is recommended as eligible for the NRHP under Criterion A and C.

RESJ CONSIDERATIONS

Markham's student population is largely reflective of district-wide averages for K-5 schools:

» For the 2021-22 school year, 39% of students are historically underserved, slightly above the K-5 school mean (34%).
» For the 2020-21 school year, 31% of students qualified for free or reduced lunch, slightly below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Markham Elementary is forecast at 73% utilization. By the 2030-31 school year, utilization is projected to increase slightly to 74%.

FACILITY CONDITION SUMMARY

Markham Elementary School is 70

years old, and in poor condition with a facility condition index (FCI) score of 0.19. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures had exceeded typical design life.
- The domestic water piping and sanitary waste piping was assumed to be original and assumed to have exceeded typical design life.
- One of the water heaters had exceeded typical design life.
- The ventilation exhaust fans/ supply fans had exceeded typical design life.
- The classroom ventilators and heaters had exceeded typical design life.
- The pneumatic controls and associated air compressor had exceeded typical design life.

Fire Protection

- The fire alarm control panel and alarm devices were in good condition and had no deficiencies observed.
- The fire suppression system had exceeded its design life.

Electrical

- The main distribution switchgear and 18 of the distribution panels had exceeded typical design life.
- The interior lighting was approaching the end of typical design life.

Arch/Struct/Site

- Recommend review of the asphalt hard surface play area. The uneven surface presents trip hazards for the frequently used play area.
- The roof was observed with organic growth and there was evidence of leaks. The roof was nearing the end of design life.
- The wood windows and exterior doors were damaged and beyond typical design life.
- The majority of interior architectural components had exceeded design life.
- The asphalt at the north side of the play fields was damaged by tree roots. It was reported that the tree roots also impacted drainage and underground piping.

RECENT CAPITAL EXPENDITURES

- ADA Upgrades (Restrooms) in 2018
- Replacement of Boiler Condensate Tank in 2018
- Asphalt Replacement at Play Areas in 2019
- Stormwater Upgrades in 2018
- Fire Alarm Upgrades in 2020
- Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

- The ECE room meets approximately 75% of the size standard. There is no in-room restroom.
- There are two rooms used for special education. One is a small general classroom that meets approximately 72% of the size standard. There are two restrooms with electric lift tables for changing, but only one of them is located near these two classrooms.
- The art room is large and cavernous and the single sink is located distant from the instructional area.
- There is a main gym that meets approximately 85% of the size standard, as well as a smaller gym.
- An auditorium with stage is present.
- A dedicated music room is present.
- A long, narrow library media center is present.
- The cafeteria is adequately sized; however, the food prep area is undersized.
- There is no security vestibule or active supervision of the entrances.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Re-purpose space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners.
- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

MARYSVILLE ELEMENTARY SCHOOL

ADDRESS
7733 SE RAYMOND ST

CONSTRUCTION DATE
1921 (PRIMARY)

LEVELS
1

BLDG AREA
52,724 SF

SITE AREA
226,512 SF
5.2 ACRES

CLASSROOMS COUNT
26

FUNCTIONAL CAPACITY
533 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
0

ZONING
R2.5 RESIDENTIAL 2,500 CU

HISTORICAL SUMMARY

Marysville Elementary School is situated in the Foster-Powell neighborhood of Southeast Portland. The school facility, oriented on an east-west axis, consists of a U-shaped building that surrounds a central courtyard. The single story building rests on a poured concrete foundation. The wings that comprise the Colonial Revival style building are covered with hipped roofs. Cladding consists of horizontal vinyl siding. Fenestration consists primarily of groups of eight-over-twelve triple hung wood windows. The centrally located entry to the school is emphasized by an open bed pediment portico supported by four Tuscan columns. A cupola caps the south wing. Additional entries are located beneath more modest open bed pediment entries flanked by paired Tuscan columns.

The neighborhood is comprised of primarily single family residences built between 1900-1950. The primary entrance to the school is from the south on SE Raymond Street. Grass and asphalt covered play areas occupy the north portion of the parcel.

The 1922 Colonial Revival school building is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Marysville Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 43% of students are historically underserved, greater than the K-5 school mean (34%).
- For the 2020-21 school year, 45% of students qualified for free or reduced lunch, well above the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Marysville Elementary is forecast at 51% utilization. By the 2030-31 school year, utilization is projected to decrease to 48%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Marysville Elementary School is 100 years old, and in poor condition with a facility condition index (FCI) score of 0.19. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The water heater serving the kitchen and the water heater serving the building had both exceeded their typical design lives.
- One of the two boilers was original to the facility but had been retrofitted with a gas burner.
- The unit ventilators on the west side of the facility were replaced in 2012 due to a fire.

Fire Protection

- A fire suppression system serving the entire building was installed 2012.

Electrical

- The site's service entrance equipment and the majority of the electrical system's interior distribution was replaced in 2013. However, ten distribution panels located throughout the facility were observed to have exceeded their typical design lives.

Arch/Struct/Site

- Many of the exterior concrete steps were observed to be cracked or crumbling.
- The historic wooden window frames, wood trim, and wood exterior doors had cracking paint. The exterior windows and doors had exceeded their typical design lives.
- Though the east half of the school was rebuilt after a fire, many of the interior finishes in the west half had exceeded their typical design lives.
- The exterior brick around the boiler room was heavily weathered with many chipped bricks.

RECENT CAPITAL EXPENDITURES

- ADA Access Upgrades (Exterior Doors) in 2017
- Radon Mitigation in 2018-19
- Replacement of Boiler Condensate Tank in 2018
- Gym Soundproofing in 2019
- Stair Replacement in 2020
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- Classrooms are generally undersized (68-83% of size standard).
- Kindergarten classrooms lack dedicated, adjacent restrooms.
- Two (2) undersized SPED classrooms are present. One of the SPED classrooms is located next to the gym and experiences a high level of noise transference. The SPED rooms do not have adjacent, dedicated ADA restrooms or a changing table.
- There is no dedicated music room.
- A small art room (67% of size standard) is present, but is partially carpeted. The kiln is positioned in an outdoor storage shed.
- The gym is severely undersized (33% of size standard) with poor acoustics.
- A small multipurpose room and stage are provided.
- The library media center is a converted gym space with an awkward layout.
- There is no buzzer or other active control of the main entrance.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Evaluate Marysville as a possible candidate for adding or repurposing space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners in southeast Portland.
- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including

new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

MLK JR ELEMENTARY SCHOOL

ADDRESS
4906 NE 6TH AVE

CONSTRUCTION DATE
1925 (PRIMARY)

LEVELS
2

BLDG AREA
108,598 SF

SITE AREA
213,880 SF
4.91 ACRES

CLASSROOMS COUNT
35

FUNCTIONAL CAPACITY
635 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU
OS OPEN SPACE CU

HISTORICAL SUMMARY

Situated in the King neighborhood of Northeast Portland, MLK Jr. Elementary School was constructed over three distinct periods. The original 1926 section, consisting of the northernmost part of the building, rises two stories. It is a reinforced concrete building, faced with red brick that rests on a poured concrete foundation. A flat roof is concealed behind a parapet that exhibits widely spaced crenels and terra cotta coping. The 1926 building conveys its Collegiate Gothic style through the strategic use of cast stone architectural ornamentation at critical parts of the building.

The 1952 one and two story wing to the south is also constructed of concrete with red brick facing, but is largely stripped of architectural elaboration. The entrances are recessed into the building and are emphasized by the use of plain concrete. Fenestration consists primarily of grouped metal frame windows set in the original wood surrounds. The 1976 addition is also constructed of red brick but reflects the influences of Brutalism in its asymmetrical fenestration and angular roof forms.

The school does not retain a level of historical integrity commensurate with other Portland Elementary Schools constructed of similar styles during the same period and is therefore not eligible for the National Register of Historic Places. While the Collegiate Gothic style is clearly discernible on the building, several alterations have diminished the building's integrity of materials, design, and feeling. These alterations include the removal of windows, prominent addition on the south elevation, construction of the Neighborhood facility at the south end of the property, extensive interior modifications that have blurred the original corridor plan and altered major spaces that included the original auditorium. Due to the loss of integrity, Martin Luther King Jr. Elementary School is not eligible under NRHP Criteria A, B, or C.

RESJ CONSIDERATIONS

MLK Jr. Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 61% of students are historically underserved, significantly greater than the K-5 school mean (34%).
» For the 2020-21 school year, 45% of students qualified for free or reduced lunch, significantly more than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, MLK Jr. Elementary is forecast at 54% utilization. By the 2030-31 school year, utilization is projected to increase to 56%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

MLK Jr. Elementary School is 96 years old, and in fair condition with a facility condition index (FCI) score of 0.09. As the average FCI score for K-5 schools in PPS is 0.18, the building is in better condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the HVAC system had exceeded its typical design life. The facility's three boilers were aged; however, their burners were retrofitted to natural gas in 2012. The condensate pump package and boiler feed water package were both corroded and had signs of leaks. The classrooms in the main facility had unit ventilators, while classrooms in the south addition and other areas throughout the buildings were heated via fin tube radiators and air handling units. The NBRHD facility had an air handling unit with a heating coil and a new rooftop package unit conditioning the facility.
» An elevator was installed in the facility in 2018. The elevator served three floors and had no major deficiencies.
» The facility had two water heaters located in Room 1. Both water heaters were installed in 2018. The NBRHD facility had an electric water heater located in the mechanical room that had exceeded its typical design life.
» Plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles. A water cooler in this facility had signage stating that a lead hazard was present.

Fire Protection

» The fire alarm control panel and fire alarm devices had recently been replaced and did not have any major deficiencies observed or reported.
» The main facility, south addition, and NBRHD facility were all protected by a wet pipe sprinkler system. There were no major deficiencies observed or reported.

Electrical

» The majority of the electrical distribution system, including the main switchboard, had exceeded its typical design life. The panels supporting the IT systems were installed in 1997. The majority of the interior lighting was much newer than the distribution equipment, but had exceeded its typical design life.

Arch/Struct/Site

» The roof was installed in 2018, however, there were known issues and water leaks.
» There were interior water leaks in the NBRHD facility. Staff reported some of the roof drains were backing up.
» There were leaks in the boiler room and adjacent storage room.
» The kitchen flooring was beyond its typical design life. Staff reported the floor would be refinished over the holidays.

RECENT CAPITAL EXPENDITURES

» Wireless Upgrades in 2019
» Drinking Fountain Fixture Upgrades in 2021

EDUCATIONAL SUITABILITY

» This school has been renovated to create flexible learning and working spaces adjacent to general classrooms.
» Classrooms are undersized (approximately 71% of size standard) and many open to adjoining spaces that are used for flexible grouping, acoustic separation is inadequate.
» The school lacks purposely designed special education spaces.
» While the school does have a dedicated science lab, it has neither an art classroom nor a music room.
» The school has a small gym (75% of standard) and a separate dance room.
» A cafeteria with a small stage is provided.
» The library media center is located in a converted auditorium; the space is poorly configured.
» There is no buzzer or camera at the main entry and the office is located across the corridor, providing no active control of the entrance.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Re-purpose space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners.
» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

PENINSULA ELEMENTARY SCHOOL

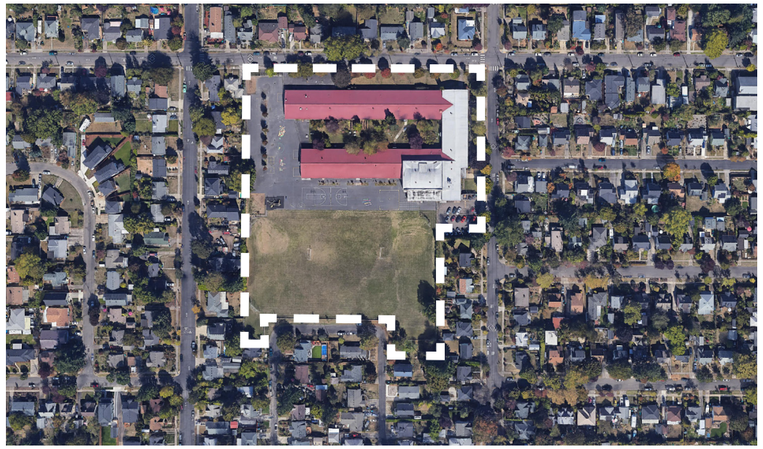

ADDRESS
8125 N EMERALD AVE

CONSTRUCTION DATE
1952 (PRIMARY)

LEVELS
1

BLDG AREA
62,231 SF

SITE AREA
293,159 SF
6.73 ACRES

CLASSROOMS COUNT
29

FUNCTIONAL CAPACITY
613 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

The Peninsula Elementary School is a one story brick veneer building designed in the International style. The campus consists of a 1952 single story brick-faced building that forms a U-shaped plan. The wings that make up the U-shaped plan are separated by a courtyard and form a variation on a finger plan type school. The building features International style elements such as a linear composition, bands of aluminum windows, flat roofs, overhangs, and a lack of ornamentation. These elements serve to reinforce the ideals of functionalism and minimalism.

Peninsula Elementary School is situated in the Portsmouth neighborhood of North Portland. The campus occupies a rectangular parcel between N Emerald Avenue on the east, N Halleck Street on the north, and single family residences on the south and west. The school is located on the north end of the campus, play grounds surround the south and east sides of the building, and play fields are located on the south end of the campus.

Peninsula Elementary School retains excellent integrity of location, design, setting, materials, workmanship, feeling, and association with its plan and exterior and interior finishes. The 1952 International style influenced school is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Peninsula Elementary School has attributes that place it in a moderately high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 44% of students are historically underserved, slightly above the K-5 school mean (34%).
- For the 2020-21 school year, 27% of students qualified for free or reduced lunch; this is greater than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Peninsula Elementary is forecast at 45% utilization. By the 2030-31 school year, utilization is projected to decrease to 42%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Peninsula Elementary School is 69 years old, and in fair condition with a facility condition index (FCI) score of 0.09. As the average FCI score for K-5 schools in PPS is 0.18, the building is in better condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures were aged, but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
- The main facility's boilers were original to the facility but had been retrofitted with gas burners in 2012.
- Four PACE ventilation units and four supply fans were observed in the attic space. All units had exceeded their typical design lives.
- The vacuum pump in Room 131 was discharging excessive water and was heavily corroded.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and did not have any major deficiencies observed or reported.
- The facility did not have a fire suppression system.

Electrical

- While several panel boards were recently installed or replaced, including the 1000 amp main distribution panel and several panels supporting the IT equipment, the majority of the electrical distribution equipment was original to the 1953 building construction and was antiquated.
- The exterior lighting had been upgraded to LED or CFL fixtures, but the majority of the interior lighting had exceeded its typical design life.

Arch/Struct/Site

- The gymnasium roof structure had failed and was recently repaired.
- The gymnasium walls and ACT had water damage and were delaminated.
- There was evidence of water intrusion and deterioration of attic insulation.
- The roof was aged and had exceeded its design life.

RECENT CAPITAL EXPENDITURES

- Radon Mitigation in 2017-18
- Emergency Generator Replacement in 2018
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- A number of regular classrooms have been converted to space that can be used for multiple learning styles.
- Four regular classrooms are used for special education programs (undersized for SPED with no specialized features).
- Music is held in a traditional general classroom that is undersized for music with poor acoustics.
- Art is held in a general classroom without storage, casework, or equipment needed for effective art instruction.
- The multipurpose room is equipped with a stage.
- The library media center is located in a repurposed space that was formerly two general classrooms.
- The gym is undersized (75% of standard).
- The cafeteria is adequately sized; however, the kitchen is small.
- No entry vestibule is present at the main entry.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including

new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications. Music is currently held in a general classroom.
» Facilities upgrades to general classroom currently used for art to create a space configured and equipped for visual arts, per current Ed Specifications, with a working, properly ventilated kiln. Art instruction currently occurs in a general classroom.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

RICHMOND ELEMENTARY SCHOOL

ADDRESS
2276 SE 41ST AVE

CONSTRUCTION DATE
1908 (PRIMARY)

LEVELS
3

BLDG AREA
79,894 SF

SITE AREA
166,399 SF
3.82 ACRES

CLASSROOMS COUNT
30

FUNCTIONAL CAPACITY
723 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

The Richmond School is situated in the Richmond neighborhood of Southeast Portland. The campus includes a two-story school building with a basement. Built in 1908, the building originally featured Classical Revival detailing, but all of these architectural embellishments were covered by a subsequent veneer of yellow brick. The building retains its interconnecting hip and gable roofs. The building's irregular shaped plan includes classrooms, a multi-purpose room, a gymnasium, a library, and an administrative office.

The Richmond School, which faces SE 41st Avenue, is situated on a grass-covered and asphalt campus with playgrounds and ball fields located to the south of the school. The primary entrance to the building is on SE 41st Avenue. The parking area occupies the north side of the building.

Although designed by Thomas Jones, the first district architect for Portland Schools, Richmond School does not retain a level of historical integrity commensurate with other schools constructed during the early twentieth century and is therefore not eligible for the National Register of Historic Places.

RESJ CONSIDERATIONS

While Richmond serves a fairly diverse student population, student poverty levels are among the lowest of district's elementary schools.

» For the 2021-22 school year, 10% of students are historically underserved; this is greater than the K-5 school mean (34%).
» For the 2021-22 school year, 4% of students qualified for free or reduced lunch; this is far below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Richmond Elementary is forecast at 84% utilization. By the 2030-31 school year, utilization is projected to decrease slightly to 83%.

FACILITY CONDITION SUMMARY

Richmond Elementary School is 113 years old, and in poor condition with a facility condition index (FCI) score of 0.2. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The domestic water distribution equipment was approaching the end if its typical design life.
» Most of the HVAC equipment was replaced during the 1953 cafetorium addition and had exceeded its typical design life.

Fire Protection

» A wet pipe sprinkler system served the entire building.

Electrical

» The site's service entrance equipment and a portion of the electrical system's interior distribution was replaced in 1998. However, a portion of the system including distribution panels, transformers, and lighting throughout the facility had exceeded their typical design lives.

Arch/Struct/Site

» Many of the acoustic ceiling tiles were patched, loose, missing, or stained.
» The majority of the interior finishes were beyond their design lives including loose vinyl tile floor and wall coverings and stained ceiling tiles.
» Many of the shingles on the pitched roof were sagging or had detached and slid down the roof.
» The interior vinyl tile wall finish in the annex was loose or missing in a few areas.
» The exterior brick wall was heavily weathered in spots, with deep grooves in the mortar joints, or brick faces worn down to the mortar.

RECENT CAPITAL EXPENDITURES

» Select Flooring Replacements in 2018
» Roof Repairs in 2018
» Fire Alarm Upgrades in 2020

EDUCATIONAL SUITABILITY

» The school has some small spaces to accommodate differentiated learning or different grouping patterns. Eight general classrooms have small anterooms that provide limited space for small groups to work.
» The school lacks purposely designed special education spaces.
» No music room is present.
» The small art room is long, narrow, and poorly configured. The kiln is in a separate room.
» A large P.E. activity space is provided, but has poor acoustics.
» The cafegymatorium has a small stage.
» The main entrance is not locked and has no buzzer/camera or security vestibule and is not under active supervision from the office which is located a floor above the doors.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

RIEKE ELEMENTARY SCHOOL

ADDRESS
1405 SW VERMONT ST

CONSTRUCTION DATE
1961 (PRIMARY)

LEVELS
1

BLDG AREA
34,272 SF

SITE AREA
550,163 SF
12.63 ACRES

CLASSROOMS COUNT
20

FUNCTIONAL CAPACITY
492 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
6

ZONING
CM2 COMMERCIAL MIXED USE 2
R7 RESIDENTIAL 7,000 CU
OS OPEN SPACE CU

HISTORICAL SUMMARY

Rieke Elementary School is located in the Hillsdale neighborhood of Southwest Portland. The property includes the main school building, a multi-purpose building (1968), a playshed (1977), and a portable (2007). The one story building reflects International style influences through its horizontal appearance, glazed curtain walls, low sloping butterfly roof, and wide overhanging eaves.

The campus is bounded by the Ida B Wells (formerly Wilson) High School property to the east, Vermont St. to the south, SW Bertha Blvd. to the west, and commercial strip development to the north. The school occupies the south side of the lot along Vermont St. and is well shaded by trees to the south. Development in the surrounding area consists primarily of single family residences built between 1950 and 1990. Playing fields are largely located to the north of the school. Although the Rieke School retains its integrity with its floor plan and many of the exterior and interior finishes intact, it is not recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Rieke serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 15% of students are historically underserved, significantly below the K-5 school mean (34%).
» For the 2021-22 school year, 6% of students qualified for free or reduced lunch, significantly below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Rieke Elementary is forecast at 74% utilization. By the 2030-31 school year, utilization is projected to decrease to 68%.

FACILITY CONDITION SUMMARY

Rieke Elementary School is 60 years old, and in poor condition with a facility condition index (FCI) score of 0.17. As the average FCI score for K-5 schools in PPS is 0.18, the building condition is in slightly worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the plumbing fixtures had exceeded typical design life.
» The domestic water piping and sanitary waste piping was assumed to be original and had assumed to have exceeded typical design life.
» The water heater and both boilers had exceeded typical design life.
» The air handling units had exceeded typical design life.
» The classroom ventilators and heaters had exceeded typical design life.
» The pneumatic controls and associated air compressor had exceeded typical design life.

Fire Protection

» The fire alarm control panel and alarm devices were in good condition and had no deficiencies observed.
» There was no sprinkler system observed.

Electrical

» The main distribution switchgear and eight of the distribution panels had exceeded typical design life.
» The interior lighting was approaching the end of typical design life.
» The natural gas generator and associated automatic transfer switch had exceeded typical design life.

Arch/Struct/Site

» The main building had evidence of roof leaks.
» The north addition soffit was damaged.
» The carpeting in Portable 1 had exceeded design life.
» The wood canopy at the covered play area was aged beyond typical design life. The paint was weathered and there were areas of isolated damage.
» The asphalt drive and parking lot had large areas of alligator cracking.

RECENT CAPITAL EXPENDITURES

» ADA Upgrades in 2018-19
» Gym Flooring Replacement in 2019
» Installation of Gym Climbing Wall in 2019
» Playground Drainage Improvements in 2019
» Drinking Fountain Fixture Replacements in 2021
» Roof Replacement in 2021

EDUCATIONAL SUITABILITY

» The school lacks purposely designed special education spaces.
» No dedicated music room is present.
» A small art room is provided (78% of standard).
» A small cafegymatorium is present, limiting use of the space.
» No performing arts space or stage is provided at this school.
» The library media center is undersized (72% of standard) with poor acoustics.
» This school is on a high traffic street with no fencing between school building and road.
» The main entry lacks a secure vestibule; remote control of doors from the office is not provided.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure.
» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force,

including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

» Construct a new gymnasium.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

RIGLER ELEMENTARY SCHOOL

ADDRESS
5401 NE PRESCOTT ST

CONSTRUCTION DATE
1931 (PRIMARY)

LEVELS
3

BLDG AREA
69,143 SF

SITE AREA
382,021 SF
8.77 ACRES

CLASSROOMS COUNT
30

FUNCTIONAL CAPACITY
589 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
8

ZONING
R7 RESIDENTIAL 7,000 CU

HISTORICAL SUMMARY

Situated in the primarily single family residential neighborhood of Northeast Portland, the Rigler Elementary School is located on a campus that consists of a multi-story school building and four detached portable/modular classrooms. Built in 1931, the Mediterranean Revival style building with minor Art Deco influences and a pantile roof is a reinforced concrete structure with brick veneer and cast stone ornamentation. The building's modified L-shaped plan includes classrooms, a library, an auditorium, a gymnasium, a cafeteria, and an administrative office.

The school faces NE Prescott Street and is situated on a grass-covered and asphalt campus with play fields, a play shed, and playgrounds north and west of the school. During the mid-1950s, a one story brick addition was constructed onto the rear (east wing) of the building. The school's parking area is located to the southwest of the main building. Rigler School retains its integrity with minimal alterations to its plan and exterior and interior finishes. The 1931 school is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Rigler Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals..

» For the 2021-22 school year, 81% of students are historically underserved, significantly above the K-5 school mean (34%).
» For the 2020-21 school year, 46% of students qualified for free or reduced lunch, more than double the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Rigler Elementary is forecast at 47% utilization. By the 2030-31 school year, utilization is projected to decrease to 45%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Rigler Elementary School is 90 years old, and in poor condition with a facility condition index (FCI) score of 0.14. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
- The main facility's boilers were original to the facility but had been retrofitted with gas burners in 2006.
- All unit ventilators in the classrooms and air handling units throughout the facility had exceeded their typical design lives.
- All rooftop exhaust fans had been replaced during the roof renovation in the summer of 2019.
- Facility staff reported issues with the steam piping serving the portable units.
- Both thru-wall heat pumps at Portable 5 used R-22 refrigerant.
- Construction was underway on a new passenger elevator for the main facility.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and did not have any major deficiencies observed or reported.
- The facility did not have a fire suppression system.

Electrical

- The main distribution panel and the majority of the remaining distribution panels were installed around 1970 and had exceeded their typical design life. The remaining electrical distribution equipment was more recently installed or replaced.
- The majority of the exterior lighting had been upgraded to LED fixtures; however, staff reported that the exterior lighting was not sufficient. The exterior CFL fixtures and the majority of the interior lighting had exceeded it typical design life and needs replacement.

Arch/Struct/Site

- The roofs of the main school and portables were replaced in 2019.
- Staff reported the portables flooring was rotted from steam piping.

RECENT CAPITAL EXPENDITURES

- Asbestos Remediation in 2020
- Seismic Strengthened Roof in 2019
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- General classrooms vary in size. Most rooms meet approximately 75% of the size standard.
- The school lacks purposely designed special education spaces.
- No dedicated music room is present.
- The art room is partially carpeted. The kiln is located down 2 flights of stairs in the boiler room.
- The gym meets approximately 50% of the size standard and has poor acoustics.
- A large auditorium is provided with a small stage area.
- The cafeteria is large enough for the enrollment, but has several large columns located in the space that limit seating arrangements. The kitchen is undersized.
- The main entrance lacks a buzzer or camera and the door is kept unlocked. The office has a view of the main door, but no active control of the entrance.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

ROSA PARKS ELEMENTARY SCHOOL

ADDRESS
8960 N WOOLSEY AVE

CONSTRUCTION DATE
2006 (PRIMARY)

LEVELS
2

BLDG AREA
68,176 SF

SITE AREA
117,612 SF
2.7 ACRES

CLASSROOMS COUNT
26

FUNCTIONAL CAPACITY
594 STUDENTS

CLUSTER
ROOSEVELT

MODULAR CLASSROOMS
0

ZONING
R2 RESIDENTIAL 2,000 CU
CM2 COMMERCIAL MIXED USE 2

HISTORICAL SUMMARY

Rosa Parks Elementary School was constructed in 2006 and does not have significant history.

RESJ CONSIDERATIONS

Rosa Parks Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

- For the 2021-22 school year, 86% of students are historically underserved; this is significantly above the K-5 school mean (34%).
- For the 2021-22 school year, 65% of students qualified for free or reduced lunch, the highest of any elementary school in the district and significantly above the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Rosa Parks Elementary is forecast at 46% utilization. By the 2030-31 school year, utilization is projected to decrease to 38%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Rosa Parks Elementary School is 15 years old, and in good condition with a facility condition index (FCI) score of 0.01. As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly better condition than other elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- One of the condensing units for the kitchen refrigeration equipment had ice buildup on its refrigerant piping indicative of low refrigerant levels.
- Two rooftop exhaust fans, EF-2 and EF-6, made excessive noise at the time of assessment indicating an alignment issue or failing bearings
- The domestic water heaters at this facility had exceeded their typical design life and were in need of replacement. The remaining assets within the plumbing system were installed in 2006 during building construction and had no major deficiencies.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and had no major deficiencies observed or reported.
- There was a wet pipe sprinkler system observed throughout the entire facility. No deficiencies were observed or reported with the system.

Electrical

- The electrical distribution was original to building construction in 2006 and had no major deficiencies observed or reported. The majority of the lighting at this facility had been recently updated to LED.

Arch/Struct/Site

- The CMU wall at the trash bin area had signs of efflorescence.
- There was an area of sidewalk at the northeast elevation that was displaced.

RECENT CAPITAL EXPENDITURES

- Select Carpet Replacements in 2018
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- The school lacks purposely designed special education spaces.
- A separate art room is provided with access to an outdoor patio. It is slightly undersized (78% of standard).
- A dedicated music room is present.
- There is no fixed-platform performing arts space at the school.
- The cafeteria is appropriately sized for the student population.
- The main office has a camera/buzzer to open the main entrance, but has no active supervision/control over the door.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

ROSE CITY PARK ELEMENTARY SCHOOL

ADDRESS
2334 NE 57TH AVE

CONSTRUCTION DATE
1912 (PRIMARY)

LEVELS
3

BLDG AREA
73,719 SF

SITE AREA
161,172 SF
3.7 ACRES

CLASSROOMS COUNT
28

FUNCTIONAL CAPACITY
636 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

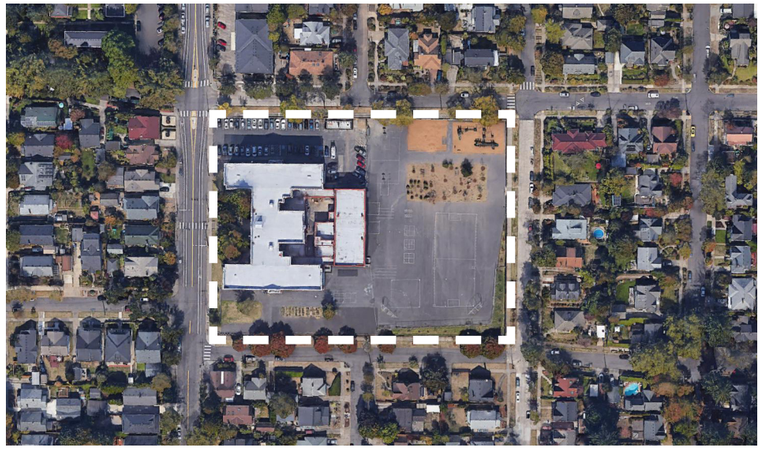

HISTORICAL SUMMARY

Rose City Park Elementary School is located in Northeast Portland. The campus includes a primary, multi-story building surrounded by asphalt covered parking and play areas. The red brick building is covered by a flat roof. The irregular shaped mass of the building rests on a poured concrete foundation. The fenestration consists of a mixture of original wood frame and grouped metal frame windows. Designed in the Collegiate Gothic style, the school features glazed terra cotta coping, belt cornice, cartouches, window surrounds, and a cap for the poured concrete water table. Four-centered arches cap the entries to the building.

The primary school building is situated at the west end of a rectangular parcel. Development in the surrounding area consists primarily of single family residences built between 1900 and 1950. An asphalt parking area is located at the north end of the parcel.

Despite the alterations to the school, Rose City Park School is an important historic resource in the city of Portland that is eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Rose City Park's student population is largely reflective of district-wide averages for K-5 schools:

- For the 2021-22 school year, 16% of students are historically underserved, slightly less than the K-5 school mean (34%).
- For the 2021-22 school year, 17% of students qualified for free or reduced lunch; this is below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Rose City Park Elementary is forecast at 89% utilization. By the 2030-31 school year, utilization is projected to decrease to 78%.

FACILITY CONDITION SUMMARY

Rose City Park Elementary School is 109 years old, and in poor condition with a facility condition index (FCI) score of 0.12. As the average FCI score for K-5 schools in PPS is 0.18, the building is in better condition than most of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the plumbing fixtures had exceeded their typical design lives. The domestic water distribution equipment had no major deficiencies.
- The vast majority of the heating and cooling equipment, exhaust fans, and associated equipment had exceeded their design lives.

Fire Protection

- An addressable fire alarm system headend (Potter PFC-6800) and associated detection and signal devices were installed in 2019.
- The building was partially sprinkled.

Electrical

- The building's 208Y/120V main electrical switchboard was last upgraded in 1977, and had exceeded its typical design life. Most of the panel boards had exceeded their design lives as well, with some dating before 1977. A sub-distribution panel board (SDP-IT) had been added in 1997 as part of a telecommunications upgrade, along with three subfed panel boards (E, IT1, and IT2).

Arch/Struct/Site

- The roof hatch had exceeded typical design life and had a degraded surface finish, weak springs, and rusted hardware.
- The original skylight had exceeded typical design life and had corroded frames and missing flashing.

RECENT CAPITAL EXPENDITURES

- ADA Upgrades in 2017
- Wireless Upgrades in 2018
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- Rose City Park Elementary does include some flexible areas to support collaboration and differentiated instruction.
- General classrooms are undersized (70% of size standard), particularly kindergarten classrooms (60% of size standard).
- The school lacks purposely designed special education spaces.
- An undersized (65% of size standard) music room is provided, though it provides a poor environment for music instruction.
- No art room is present.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.

- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the District's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

SABIN ELEMENTARY SCHOOL

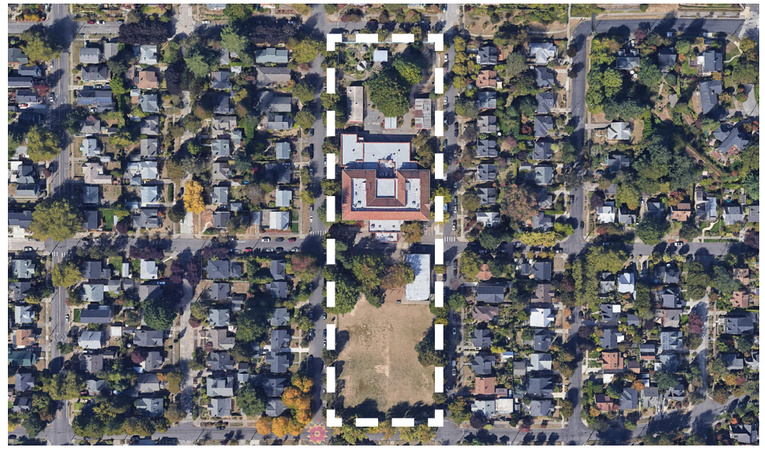

ADDRESS
4013 NE 18TH AVE

CONSTRUCTION DATE
1928 (PRIMARY)

LEVELS
3

BLDG AREA
65,769 SF

SITE AREA
158,123 SF
3.63 ACRES

CLASSROOMS COUNT
31

FUNCTIONAL CAPACITY
610 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
4

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Sabin Elementary School is situated in the Sabin neighborhood of northeast Portland. The campus consists of a primary school building, three portables, and a covered play structure. The reinforced concrete structure, faced with red brick, rests on a poured concrete foundation. Red pantiles cover the hipped roof. Designed in the Mediterranean Revival style, cast stone belt course, quoins, and cartouches divide the building horizontally and embellish significant architectural spaces. Fenestration consists primarily of grouped, metal frame windows and some original multi-light wood frame windows.

Development in the surrounding neighborhood consists primarily of single family residence built between 1900-1950. The campus consists of a primary school building, three portables, and a covered play structure. The north and south portions of the campus are utilized for play areas.

Due to the loss of integrity, Sabin Elementary School is not eligible under either NRHP Criteria A, B, or C.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Sabin serves a less diverse student population with relatively low poverty levels compared to the district average.

- For the 2021-22 school year, 29% of students are historically underserved, well below the K-5 school mean (34%).
- For the 2020-21 school year, 18% of students qualified for free or reduced lunch, significantly less than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Sabin Elementary is forecast at 60% utilization. Utilization is projected to remain steady over the next several years, staying at 60% in 2030-31.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Sabin Elementary School is 93 years old, and in fair condition with a facility condition index (FCI) score of 0.08. As the average FCI score for K-5 schools in PPS is 0.18, the building is in much better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the HVAC system had exceeded its typical design life. The boilers were aged; however, their burners were retrofitted to natural gas in 2012. Both boilers' chemical circulation pumps had signs of leaks and were corroded. The classrooms had unit ventilators, while other areas of the facility utilized air handling units and fin tube radiators.
- An elevator was installed in the facility in 2007. The elevator served three floors and no major deficiencies were observed.
- The main facility had one water heater located in Room 102B, which was installed in 2018. Portable 1 had a small water heater located in a closet adjacent to the restroom. Portable 1's water heater was installed around 2013.
- Plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and were observed to be in good condition with no major deficiencies noted or reported.
- The main facility was protected by a wet pipe sprinkler system covering the corridors, stairwells, and classroom entrances. There were no major deficiencies observed or reported.

Electrical

- With the exception of several newer panel boards, the electrical distribution system was installed during a 1978 electrical renovation which had exceeded its typical design life. All the exterior lighting had recently been upgraded to LED fixtures. The majority of the interior lighting was installed around 1990 and had exceeded its typical design life.

Arch/Struct/Site

- A portion of the interior flooring finishes and classroom casework have exceeded their design lives.

RECENT CAPITAL EXPENDITURES

- Fire Alarm Upgrades in 2020
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- Some classrooms are accessed by going through other classrooms, causing disruption.
- Several classrooms and the library media center have very limited access to natural light.
- Half of the SPED classrooms do not meet the size standard. None of the SPED classrooms have dedicated ADA restrooms.
- The school does not have a dedicated music room, nor does it have an art room.
- The school has a cafegymatorium, limiting use of the space.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure.
- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Construct a new gymnasium.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

SCOTT ELEMENTARY SCHOOL

ADDRESS
6700 NE PRESCOTT ST

CONSTRUCTION DATE
1949 (PRIMARY)

LEVELS
2

BLDG AREA
68,805 SF

SITE AREA
248,728 SF
5.71 ACRES

CLASSROOMS COUNT
29

FUNCTIONAL CAPACITY
643 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
2

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Roseway neighborhood of Portland, Harvey Scott Elementary School occupies the northeast corner of Wellington Park. The school was designed to be expanded as enrollment increased. The campus buildings include a 1949 main building in a modified H-shaped plan, a 1951 detached secondary classroom building, a 1967 industrial arts building, and a 1977 covered play shed. The single-story brick buildings, separated by courtyard spaces, form a variation on a finger plan type school.

The neighborhood consists of a mixture of single family residences built primarily between 1930 and 1950. The primary entrance to the facility is from NE Prescott Street. The play areas and ball fields that occupy the south portion of the campus provide visual continuity with the tree shaded areas of neighboring Wellington Park. The base of the main building features a concrete foundation, while the exterior concrete walls are faced with all stretcher bond bricks exhibiting variegated colors. Harvey Scott School retains excellent integrity with its floor plan, cladding, fenestration, and many interior finishes intact. The school is recommended eligible for the NRHP.

RESJ CONSIDERATIONS

Scott School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals..

- For the 2021-22 school year, 61% of students identified as BIPOC, significantly greater than the K-5 school mean (34%).
- For the 2021-22 school year, 47% of students qualified for free or reduced lunch, nearly double the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Scott Elementary is forecast at 74% utilization. By the 2030-31 school year, utilization is projected to decrease slightly to 73%.

FACILITY CONDITION SUMMARY

Scott Elementary School is 72 years old, and in fair condition with a facility condition index (FCI) score of 0.08. As the average FCI score for K-5 schools in PPS is 0.18, the building is in much better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- Several water coolers, including two in the east addition, had signage stating that a lead hazard was present.
- Plumbing fixtures were aged, but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
- Two condensate pump packages were corroded and leaking. These condensate recovery systems had exceeded their typical design lives.
- Air handling units throughout the main facility, shop building, and east addition had exceeded their typical design lives.
- The main facility's boilers were original to the facility but had been retrofitted with gas burners in 2007. The two boilers in the east addition were replaced in 2012.
- The main facility had two new gas water heaters that were installed in 2017.
- The facility had a new passenger elevator connecting the cafeteria, classrooms, and gym levels.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and did not have any major deficiencies observed or reported.
- The facility did not have a fire suppression system.

Electrical

- While several panel boards were recently installed or replaced, including the 800 amp main distribution panel, the majority of the electrical distribution equipment had exceeded its typical design life.
- The majority of the lighting at this facility was upgraded to LED at the end of 2018.
- Staff reported that the solar array for the photovoltaic system was no longer functioning and required additional investigation to determine the issue.

Arch/Struct/Site

- Several of the exterior wood doors were deteriorated and had exceeded their design life.
- The front pavement was cracked and uneven near the entrance along Prescott Street.

RECENT CAPITAL EXPENDITURES

- Replacement of Select Playground Equipment in 2017
- Wireless Upgrades in 2018-19
- ADA Upgrades in 2020
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- All kindergarten classrooms share use of one restroom.
- Some finishes are dated and worn.
- The art and music classrooms are in an out-building that looks to be a converted storage shed with cinder block walls. Both rooms are undersized; the music room is 63% of standard and the art room is 61% of the standard.
- The gym is undersized (73% of the size standard) and lacks acoustical treatments. A stage is present.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure.
- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force,

including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications. Music is currently taught in a former storage shed.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln. Art is currently taught in a former storage shed.

Moderate Priority

» Construct a new gymnasium.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

SITTON ELEMENTARY SCHOOL

ADDRESS
9930 N SMITH ST

CONSTRUCTION DATE
1949 (PRIMARY)

LEVELS
1

BLDG AREA
58,487 SF

SITE AREA
302,742 SF
6.95 ACRES

CLASSROOMS COUNT
29

FUNCTIONAL CAPACITY
467 STUDENTS

CLUSTER
ROOSEVELT

MODULAR CLASSROOMS
2

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Sitton Elementary School is situated in the primarily residential neighborhood of St. Johns in North Portland. Built in 1949, the school is a simplified version of the Northwest Regional style. The school building is situated on a grass and asphalt-covered campus. The single story building sits on a poured concrete foundation. Cladding for the wood frame structure consists of vertical boards with narrow battens. The building is covered by flat and low pitched gable roofs. The rectangular shape plan houses classrooms, a gymnasium, a covered play area, a courtyard, a media center, a cafeteria and an administrative office.

The playground and playfields are located directly to the south, west and north of the school. The parking area is located directly north of the school building.

Although Sitton School was one of the first schools constructed by Portland Public Schools after World War II, the building is not recommended as eligible for the National Register of Historic Places.

RESJ CONSIDERATIONS

Sitton Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 61% of students are historically underserved, significantly above the K-5 school mean (34%).
» For the 2020-21 school year, 47% of students qualified for free or reduced lunch, more than double the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Sitton Elementary is forecast at 76% utilization. By the 2030-31 school year, utilization is projected to decrease to 70%.

FACILITY CONDITION SUMMARY

Sitton Elementary School is 72 years old, and in poor condition with a facility condition index (FCI) score of 0.14. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- A water cooler in this facility had signage stating that a lead hazard was present.
- The plumbing fixtures were aged, but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
- The boilers were original to the facility but had been retrofitted with gas burners in 2012.
- There were 13 unit ventilators located in classrooms throughout the facility. The unit ventilators had exceeded their typical design lives. Many teachers complained the units did not function properly and made excessive noise during class.
- Air handling units observed throughout the facility had exceeded their typical design lives.
- The facility had three gas water heaters located in Room 27. Two of the three water heaters were replaced in 2015 and the third water heater was replaced in 2017. All were in good condition and functioning properly.

Fire Protection

- The fire alarm control panel and fire alarm devices had been recently replaced and had no major deficiencies observed or reported.
- There was a wet pipe sprinkler system observed in the corridors and classrooms. No deficiencies were observed or reported with the system.

Electrical

- While the main switchboard and panel boards supporting the IT equipment were installed in 1998 with no major deficiencies observed, the majority of the electrical distribution equipment had exceeded its typical design life and was in need of replacement.
- Exterior lighting had been upgraded to LED was reported by staff to be insufficient. The interior lighting had mostly exceeded its typical design life.

Arch/Struct/Site

- The roof was replaced in 2019.
- The wood exterior enclosure of the main building was deteriorated.
- There were moderate areas of cracking and repairs to the west walls of the main building.
- The kitchen cooler was recently repainted; however, the paint was deteriorated.
- The small wood retaining wall along the east property fence line was deteriorated.
- Staff reported that the playground equipment had deteriorated.

RECENT CAPITAL EXPENDITURES

- Sidewalk/Curb Replacement in 2018
- Playground Improvements in 2018 and 2020
- Select Flooring Replacements in 2018-19
- Generator Replacement in 2019
- Health and Safety Improvements in 2019
- ADA Upgrades in 2019
- Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

- There are few flexible spaces to support differentiated instruction.
- Classrooms (including general, kindergarten, and ECE) range in size from 80-98% of the standard.
- The SPED classroom does not have a dedicated ADA restroom.
- A science classroom is provided.
- The art classroom is located in a portable.
- A dedicated music room is present.
- The gym is undersized (63% of standard) with dated finishes.
- The office does not have remote control of the main entry doors.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln (note: art is currently taught in a portable classroom).

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

STEPHENSON ELEMENTARY SCHOOL

ADDRESS
2627 SW STEPHENSON ST

CONSTRUCTION DATE
1965 (PRIMARY)

LEVELS
2

BLDG AREA
40,460 SF

SITE AREA
381,150 SF
8.75 ACRES

CLASSROOMS COUNT
20

FUNCTIONAL CAPACITY
552 STUDENTS

CLUSTER
WELLS-BARNETT

MODULAR CLASSROOMS
0

ZONING
R10 RESIDENTIAL 10,000 CU

HISTORICAL SUMMARY

Stephenson Elementary School is situated in the residential neighborhood of Arnold Creek in Southwest Portland. The 1964 building features elements of the Northwest Regional style including a variety of cladding, roof types, and massing organized to furnish light and ventilation, and provide easy access to the outdoors. The wood frame building features an irregular massing comprised of several wings. The various wings are covered by a mixture of gable, flat and hip roofs. Siding consists of vertical board with battens and wood shingle. Facilities provided by the building include classrooms, a gymnasium/ cafetorium, media center/library and an administrative office.

The campus provides plentiful space for play fields and future school expansion. There is an asphalt-covered half-circle driveway and parking lots located opposite the school's main entrance. An asphalt-covered playground is located directly to the east of the school. Stephenson School is not eligible for listing in the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Stephenson serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 15% of students are historically underserved, significantly below the K-5 school mean (36%).
» For the 2021-22 school year, 9% of students qualified for free or reduced lunch, significantly below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Stephenson Elementary is forecast at 66% utilization. By the 2030-31 school year, utilization is projected to decrease to 62%.

FACILITY CONDITION SUMMARY

Stephenson Elementary School is 56 years old, and in poor condition with a facility condition index (FCI) score of 0.15. As the average FCI score for K-5 schools in PPS is 0.18, the building is in slightly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the plumbing fixtures had exceeded typical design life.
» The domestic water piping and sanitary waste piping was assumed to be original and had assumed to have exceeded typical design life.
» The ventilation supply/exhaust fans had exceeded typical design life.
» The classroom ventilators and heaters had exceeded typical design life.
» The pneumatic controls and associated air compressor had exceeded typical design life.

Fire Protection

» The fire alarm control panel and alarm devices were in good condition and had no deficiencies observed.
» There was no sprinkler system observed.

Electrical

» The main distribution panel and 10 of the distribution panels had exceeded typical design life.
» The interior lighting was approaching the end of typical design life.
» The natural gas generator had exceeded typical design life.

Arch/Struct/Site

» Recommend investigation of the sub-floor in the main office and corridor areas. Flex in flooring was observed and tile was damaged.
» The exterior wood siding showed signs of deterioration.
» The VCT flooring was aged beyond design life and damaged throughout. The sub-floor appeared to be damaged in isolated areas.
» The bus loop driveway had large areas of alligator cracking.

RECENT CAPITAL EXPENDITURES

» Select Flooring Replacements in 2018
» Lead Paint Abatement in 2018
» Asbestos Remediation in 2020
» Fire Alarm Upgrades in 2020
» Drinking Fountain Fixture Replacements in 2021

EDUCATIONAL SUITABILITY

» There are no group spaces, individual workstations or collaborative areas for students. The instructional spaces have little spatial configuration capability or flexibility.
» The general education classrooms meet 72% of the size standard.
» SPED spaces are not aligned for the instructional program needs and lack dedicated ADA restrooms.
» An appropriately-sized, dedicated music room is provided.
» The school lacks an art room.
» The school has a small (53% of standard) cafegymatorium, limiting use of the space. A stage is present.
» The food service / kitchen is undersized and can only be used primarily to warm prepared food from the PPS central kitchen.
» The media center is an open concept layout, causing acoustical challenges.
» There are no controlled entrances at the building doorways.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure.
» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations

of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Construct a new gymnasium.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

VESTAL ELEMENTARY SCHOOL

ADDRESS
161 NE 82ND AVE

CONSTRUCTION DATE
1929 (PRIMARY)

LEVELS
2

BLDG AREA
72,906 SF

SITE AREA
206,474 SF
4.74 ACRES

CLASSROOMS COUNT
23

FUNCTIONAL CAPACITY
554 STUDENTS

CLUSTER
MCDANIEL

MODULAR CLASSROOMS
3

ZONING
R1 RESIDENTIAL 1,000 CU
R2.5 RESIDENTIAL 2,500 CU

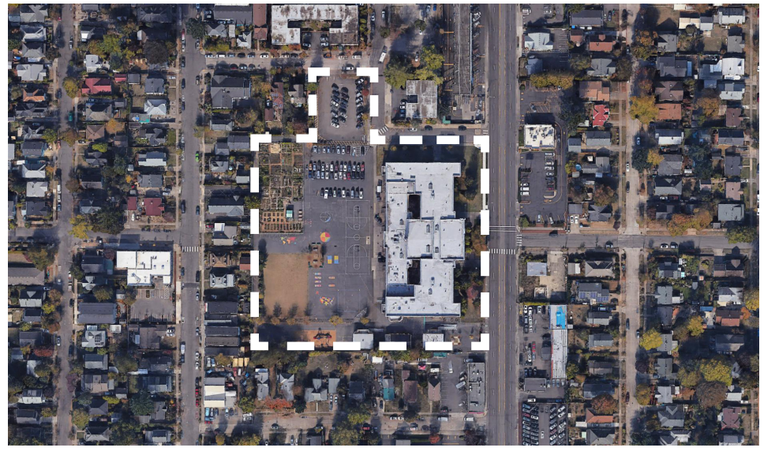

HISTORICAL SUMMARY

Vestal Elementary School is situated in the Montavilla neighborhood of east Portland. The campus consists of a primary rectangular shaped building and three portable buildings. The primary building is two-stories in height and constructed of reinforced concrete with brick veneer. The 1929 Collegiate Gothic style building is ornamented with buttresses, stone belt courses, and decorative motifs. Bands of aluminum windows with stone surrounds provide the fenestration. The front entrances, located along a central projecting bay with Tudor arched windows, feature stone surrounds and fan lights. The building is covered by a flat roof with stone cap along the parapet. The rectangular mass rests on a poured concrete foundation. Double loaded corridors provide access to the administrative offices, classrooms, and recreation spaces.

The neighborhood consists of single family residences built around the 1920s. The primary entrances to the facility are from NE 82nd Avenue.

Play areas and open space occupy the western end of the campus. South of the main building are three rectangular portable buildings arranged in a row from east to west featuring drop siding, fixed and hopper windows, and poured concrete foundations. The western and eastern buildings have flat roofs, while the central building is capped by a gable roof with shed roofed addition. .

Vestal School retains excellent integrity of location, design, setting, materials, workmanship, feeling, and association with minimal alterations to its plan and finishes and is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

Vestal School has attributes that place it in a moderately high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year,

43% of students are historically underserved, exceeding the K-5 school mean (34%).
» For the 2021-22 school year, 44% of students qualified for free or reduced lunch; this is greater than the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Vestel Elementary is forecast at 43% utilization. By the 2030-31 school year, utilization is projected to decrease to 41%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Vestal Elementary School is 92 years old, and in poor condition with a facility condition index (FCI) score of 0.21. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the plumbing fixtures were aged, but operational. The majority of the water closet flush valves had been updated with dual-flush handles.
» The main facility's boilers were original to the facility but had been retrofitted with gas burners in 2012. The boilers' chemical circulation pumps were corroded.
» All unit ventilators in the classrooms and air handling units throughout the facility had exceeded their typical design lives.

Fire Protection

» The fire alarm control panel and fire alarm devices had been recently replaced in the main school. The fire alarm devices in the three portables were not replaced during the recent upgrade and had exceeded their typical design life.
» The facility did not have a fire suppression system.

Electrical

» While several panel boards were recently installed or replaced, including the 800 amp main distribution panel, the majority of the electrical distribution equipment had exceeded its typical design life.
» The exterior lighting had been upgraded to LED recently, but the majority of the interior lighting had exceeded its typical design life.

Arch/Struct/Site

» The roof was deteriorated and has exceeded its design life.
» Window leaks were observed in gymnasium causing interior damage to gym floor and interior walls.
» The concrete slab above the boiler room was deteriorated and had signs of water intrusion.
» The majority of interior architectural components have exceeded their design life.

RECENT CAPITAL EXPENDITURES

» ADA Upgrades in 2018
» Wireless Upgrades in 2018
» Construction of Select Permanent Walls in 2019-20
» Asbestos Remediation in 2020
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» Most of the general classrooms are 68% of the size standard, whereas kindergarten classrooms are 58% of the size standard. Additionally, one kindergarten classroom is located in a portable. There are few spaces to support differentiated learning.
» The K-2 intensive skills classroom is 84% of the size standard. The 3-5th grade intensive skills classroom is 79% of the size standard.
» The school does not have a dedicated music classroom.
» The art classroom is located in a portable.
» A small cafegymatorium is provided (60% of size standard), limiting use of the space.
» There is an auditorium with a small stage that lacks acoustical treatments.
» The main entrance is actively controlled, but is not located near the main office.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Add or re-purpose space for a structured movement room (2,000 SF) to support P.E. instruction. If space for a structured movement area is unavailable, construct an additional covered play structure.
» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln. Art is currently taught in a portable classroom.

Moderate Priority

» Construct a new gymnasium.
» Re-purpose an existing space into a wellness room.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

WHITMAN ELEMENTARY SCHOOL

ADDRESS
7326 SE FLAVEL ST

CONSTRUCTION DATE
1954 (PRIMARY)

LEVELS
1

BLDG AREA
57,244 SF

SITE AREA
316,681 SF
7.27 ACRES

CLASSROOMS COUNT
26

FUNCTIONAL CAPACITY
493 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
0

ZONING
R2 RESIDENTIAL 2,000 CU

HISTORICAL SUMMARY

Marcus Whitman Elementary School is located in Southeast Portland. The campus consists of a U-shaped building built in 1954. The Northwest Regional style school incorporates an interior garden to provide maximum light and ventilation to the classrooms. Moderately sloped gable roofs cover the single story building. Fenestration consists of grouped metal frame windows. Also illustrative of the Northwest Regional style is the prominent gabled portico that marks the front entry, the exposed beam structure, and variations in massing to express internal functions on the building's exterior. The wood frame building, clad in red brick, rests on a poured concrete foundation. Moderately sloped gable roofs cover the single story building.

Recreational facilities include asphalt play areas located on the west side of the building and grass playfields on the south end of the campus. A good example of the finger plan type school in the Northwest Regional style that exhibits a high degree of integrity with its floor plan, cladding, and many interior finishes intact, Marcus Whitman Elementary School is recommended as eligible for the NRHP.

RESJ CONSIDERATIONS

Marcus Whitman Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 46% of students are historically underserved significantly greater than the K-5 school mean (34%).
» For the 2021-22 school year, 45% of students qualified for free or reduced lunch, exceeding the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Whitman Elementary is forecast at 43% utilization. By the 2030-31 school year, utilization is projected to decrease to 41%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Whitman School is 67 years old, and in poor condition with a facility condition index (FCI) score of 0.18. As the average FCI score for K-5 schools in PPS is 0.18, the building is in similar condition to many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the domestic water distribution equipment had been replaced in the past five years.
» The HVAC controls had been updated to DDC controls.
» The majority of the HVAC equipment was original to facility construction in 1954.
» The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.

Fire Protection

» The school had a wet pipe sprinkler system that served the entire building.
» The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

» The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

» The wood window frames were weathered, and much of the caulk was cracked and failing. The aluminum window frames were warped, old screw holes remained unfilled and many seals were failed around the window edges.
» Many of the vinyl tiles in the cafeteria were crumbling or patched, with epoxy seal failing.
» The majority of the interior finishes had exceeded their design lives.

RECENT CAPITAL EXPENDITURES

» ADA Upgrades in 2018
» Construction of Head Start Playground in 2018
» Wireless Upgrades in 2019
» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» General classrooms are well-sized; however, kindergarten classrooms only meet 75% of the size standard and lack dedicated restroom access.
» The school lacks purposely designed special education spaces.
» A small music room is present (62% of size standard).
» The school lacks a dedicated art classroom, but I kiln is present off of the faculty dining room.
» The gym meets 78% of the size standard.
» The cafeteria is equipped with a stage. The kitchen is undersized.
» The main entrance has no visual or active control from the office. There is no buzzer/camera system and no security vestibule.

EDUCATIONAL PROGRAM FORECAST

High Priority

» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom

per the district's Educational Specifications
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications (kiln is present).

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

WOODLAWN ELEMENTARY SCHOOL

ADDRESS
7200 NE 11TH AVE

CONSTRUCTION DATE
1926 (PRIMARY)

LEVELS
2

BLDG AREA
106,432 SF

SITE AREA
223,898 SF
5.14 ACRES

CLASSROOMS COUNT
32

FUNCTIONAL CAPACITY
644 STUDENTS

CLUSTER
JEFFERSON

MODULAR CLASSROOMS
3

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Woodlawn neighborhood of Northeast Portland, the Woodlawn Elementary School campus consists of a primary U-shaped building and three detached buildings that house classrooms. The primary building was built in 1926 in the Collegiate Gothic style. The building is two-stories in height and constructed of reinforced concrete with brick veneer. It is ornamented with stone belt courses, quoins, and decorative motifs. Bands of aluminum windows with stone surrounds provide the fenestration. The primary entry to the building is through doors that flank a central projecting bay on the west elevation. Double loaded corridors provide access to the administrative offices, classrooms, and recreation spaces.

The neighborhood consists of single family residences built between 1920 and 1950 in association with the Scoffin's Addition to the City of Portland. The primary entrances to the facility are from 7200 NE 11th Avenue. Play areas and open spaces occupy the eastern end of the campus. To the south of the main building are two portable buildings and a concrete block building arranged in a row from east to west. The portable buildings (1965, 1966) have gable roofs, aluminum hopper sash windows, and board and bat siding. The concrete block building (1966) features a flat roof and fixed aluminum windows.

Due to this loss of integrity, Woodlawn School is not eligible under either NRHP Criteria A, B, or C.

RESJ CONSIDERATIONS

Woodlawn Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 60% of students are historically underserved, significantly greater than the K-5 school mean (34%).
» For the 2021-22school year, 36% of students qualified for free or

reduced lunch, exceeding the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Woodlawn Elementary is forecast at 52% utilization. By the 2030-31 school year, utilization is projected to decrease to 47%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Woodland Elementary School is 95 years old, and in fair condition with a facility condition index (FCI) score of 0.07. As the average FCI score for K-5 schools in PPS is 0.18, the building is in considerably better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The majority of the HVAC system had exceeded its typical design life. The boilers were aged; however, their burners were retrofitted to natural gas in 2004. The classrooms had unit ventilators, most of which appeared to have been replaced around 2000. Other areas of the facility utilized air handling units and fin tube radiators.
- An elevator was installed in the facility in 2017. The elevator served two floors and did not have any major deficiencies.
- The main facility had two water heaters located in Room 1. The water heaters were installed in 2011 and 2013.
- Plumbing fixtures were aged but operational. The majority of the water closet flush valves had been updated with dual-flush handles.

Fire Protection

- While the fire alarm control panel was fairly new, the majority of the fire alarm devices had exceeded their typical design lives.
- The main facility was protected by a wet pipe sprinkler system covering the corridors and stairwells. There were no major deficiencies observed or reported.

Electrical

- The main distribution switchboard had been replaced in 2017 and the panels supporting the IT equipment were installed in 1997. The remaining pieces of the electrical distribution system were much older and had exceeded their typical design lives. The exterior lighting had recently been upgraded to predominantly LED fixtures. The majority of the interior lighting had exceeded its typical design life.

Arch/Struct/Site

- There was evidence of significant water intrusion in the locker room, storage room and gym. The large and small roof sections were ponding at several locations.
- Portable 1 and 2 roofs have exceeded their typical design life.
- Staff reported the boiler room floods from the site drain located just outside at the exterior stairs.
- The acoustical ceiling tiles were detached throughout the second floor.
- The paint was deteriorating inside the kitchen cooler.

RECENT CAPITAL EXPENDITURES

- Drinking Fountain Fixture Replacements in 2020
- Partial Roof Replacement in 2021

EDUCATIONAL SUITABILITY

- Classrooms are undersized. The kindergarten classroom lack dedicated restrooms.
- The school lacks purposely designed special education spaces.
- The gym is greatly undersized (less than 38% of standard).
- The school lacks a dedicated music room.
- Core areas, such as the library media center and cafeteria, are undersized.
- An art classroom is provided.
- The school lacks a controlled main entry.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications.

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

WOODMERE ELEMENTARY SCHOOL

ADDRESS
7900 SE DUKE ST

CONSTRUCTION DATE
1954 (PRIMARY)

LEVELS
1

BLDG AREA
51,900 SF

SITE AREA
240,887 SF
5.53 ACRES

CLASSROOMS COUNT
24

FUNCTIONAL CAPACITY
473 STUDENTS

CLUSTER
FRANKLIN

MODULAR CLASSROOMS
4

ZONING
R2.5 RESIDENTIAL 2,500 CU

HISTORICAL SUMMARY

Woodmere Elementary School is located in the Brentwood Darlington neighborhood of Southeast Portland. The campus consists of an H-shaped building built in 1954 and two portable classrooms buildings. The Northwest Regional style school incorporates an interior garden to provide maximum light and ventilation to the classrooms. The wood frame building is clad in red brick. Moderately sloped gable roofs cover the single story building. Fenestration consists of grouped metal frame windows. Development in the neighborhood consists primarily of single family residences built between 1950 and 2000. Recreational facilities include asphalt play areas located on the south side of the building and grass playfields situated at the west end of the campus.

The Woodmere School is a good example of the finger plan type school in the Northwest Regional style that exhibits a high degree of integrity with its floor plan, cladding, and many intact interior finishes and is eligible for the NRHP under Criterion A.

RESJ CONSIDERATIONS

Woodmere Elementary School has multiple attributes that place it in a high priority category for facility improvements that would advance the district's racial equity and social justice (RESJ) goals.

» For the 2021-22 school year, 44% of students are historically underserved significantly greater than the K-5 school mean (47%).
» For the 2021-22 school year, 50% of students qualified for free or reduced lunch, nearly double the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Woodmere Elementary is forecast at 57% utilization. By the 2030-31 school year, utilization is projected to decrease to 55%.

Given this anticipated enrollment pattern, the district should plan for program consolidation or co-location with other programs.

FACILITY CONDITION SUMMARY

Woodmere Elementary School is 67 years old, and in poor condition with a facility condition index (FCI) score of 0.21. As the average FCI score for K-5 schools in PPS is 0.18, the building is in worse condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

» The majority of the mechanical and plumbing system were aged and had exceeded their intended design lives.
» Signage was present throughout indicating pipe and equipment insulation contained asbestos.
» Kitchen staff stated the kitchen's AHU had not operated for the last two years.

Fire Protection

» The fire alarm control panel and devices were upgraded in 2018 and were in good condition with no deficiencies observed.
» The main facility had a wet-pipe sprinkler system typically that served the auditorium's back of stage area. No major deficiencies were observed or reported with the fire protection system at the time of assessment.

Electrical

» Approximately 85% of the distribution panel boards had exceeded design life.

Arch/Struct/Site

» The exterior wood cladding on was moderately to heavily weathered with flaking paint and some splintering panels on the roof.
» The rolled roof covering had been coated but was severely deteriorated and cracking. A leak was reported in the YMCA room, but there were many stained ceiling tiles indicating other leaks. There was moderate ponding above the gym. Some of the gutters and downspouts were clogged causing water to drain into the soffit.
» The brick stack at the boiler exhaust was heavily deteriorated with major separation at some joints.
» The exterior metal doors were moderately dented, and some had been vandalized with graffiti.
» The wood floor of the stage was heavily worn and chipped.
» The carpeting in the classrooms was moderately worn.
» The carpet was worn and stained in Portables 1 and 2.
» The exterior metal doors of Portables 1 and 2 were heavily dented and damaged.
» The exterior ramp and stairs of Portables 1 and 2 were weathered with flaking paint and signs of water damage.
» The exterior engineered wood cladding of Portables 1 and 2 was moderately weathered with flaking paint. Staff reported that gutters were overflowing at door entrances.
» The exterior steps at SE Duke Street was missing a handrail.

RECENT CAPITAL EXPENDITURES

» Drinking Fountain Fixture Replacements in 2020

EDUCATIONAL SUITABILITY

» There are no designed spaces in the school to support differentiated learning activities or different sized groups
» Classrooms are generally well-sized.
» The two (2) SPED classrooms are located adjacent to a pair of restrooms, but do not have dedicated access from within the room. The changing table is located in the gender-neutral restroom across the hall from the classrooms.
» No art room is present. A kiln is present but not vented.
» Music is held in a general classroom that is undersized for music instruction (75% of size standard) and has poor acoustics.
» The gym is undersized (63% of size standard).
» While the cafeteria is appropriately sized (with a stage), the kitchen is small and poorly configured.
» The main entrance is kept locked and has a buzzer to gain access, but there is no working camera and no active control of visitors once they have been admitted.
» The campus lacks drop-off lanes; all vehicle and bus access is along the street.

EDUCATIONAL PROGRAM

FORECAST

High Priority

» Evaluate Woodmere as a possible candidate for adding or repurposing space to provide two (2) appropriately sized and designed pre-k classrooms to support the needs of early learners in southeast Portland.
» Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
» Re-purpose space to create an art exhibition area.
» Security projects, including new classroom door locks and improvements to the security / alarm system.
» Re-purpose an existing space into a sensory motor room.
» Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
» Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
» Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
» Create an outdoor learning area to support STEM instruction and project-based learning.
» Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
» Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications. Music is currently held in a general classroom.
» Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

» Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
» Re-purpose an existing space into a wellness room.
» Allocate an area for a Reconnection Services office.
» Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

WOODSTOCK ELEMENTARY SCHOOL

ADDRESS
5601 SE 50TH AVE

CONSTRUCTION DATE
1910 (PRIMARY)

LEVELS
1

BLDG AREA
65,221 SF

SITE AREA
219,542 SF
5.04 ACRES

CLASSROOMS COUNT
28

FUNCTIONAL CAPACITY
648 STUDENTS

CLUSTER
CLEVELAND

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Woodstock neighborhood of Southeast Portland, Woodstock Elementary School occupies the south portion of Woodstock Park. The school facility consists of a modified E-shaped building. Built in the Classical Revival style, the entry to the school is located beneath a portico supported by Doric columns that divides the building bilaterally. Fenestration consists primarily of vinyl six-over-one double-hung windows with wood surrounds. Architectural embellishments in the Classical Revival style include a water table, entablature, and Tuscan corner boards with pilasters.
The neighborhood is comprised of primarily single family residences built between 1900 and 1950.

The primary entrance to the school is from the east on SE 50th Street. Grass and asphalt covered play areas occupy the west portion of the parcel.

The Woodstock School is recommended as eligible for the National Register of Historic Places (NRHP).

RESJ CONSIDERATIONS

While Woodstock serves a fairly diverse student population, student poverty levels are relatively low compared to other elementary schools in the district.

» For the 2021-22 school year, 10% of students are historically underserved, below the K-5 school mean (34%).
» For the 2021-22 school year, 13% of students qualified for free or reduced lunch, below the K-5 school mean (26%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Woodstock Elementary is forecast at 87% utilization. By the 2030-31 school year, utilization is projected to decrease to 81%.

FACILITY CONDITION SUMMARY

Woodstock Elementary School is 111 years old, and in fair condition with a facility condition index (FCI) score of 0.06 As the average FCI score for K-5 schools in PPS is 0.18, the building is in significantly better condition than many of the elementary schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The drinking fountain in the cafeteria was not operable due to lead. There were frequent problems with students using the portable drinking station.
- The majority of the plumbing fixtures had exceeded their design lives.
- The vast majority of the heating and cooling equipment, exhaust fans, and associated equipment had exceeded their design lives.

Fire Protection

- The building did not have a sprinkler system.
- A new addressable fire alarm system headend (Potter PFC-6800) and associated detection and signal devices were installed within the past year.

Electrical

- The site's main distribution switchboard was installed in 1985 and had exceeded its design life. A sub-distribution board had been installed in 1997 and was observed to be in good condition. All of the building's panel boards had been replaced in 1985 and had exceeded their design lives, save for three panel boards added in 1997 as part of the telecommunications upgrade. A generator had been installed in 1997.

Arch/Struct/Site

- The windows were difficult to operate and a portion of the windows had metal grates covering the window. The operability of the windows was a safety concern in the event of an emergency. There were sections of broken glass block window.
- The sidewalk around the school was heaving and presented a trip hazard.
- The VCT flooring was aged beyond design life and damaged. It was reported that the mastic possibly contained a hazardous substance.

RECENT CAPITAL EXPENDITURES

- Lead Paint Abatement in 2017
- Asbestos Remediation in 2018 and 2020
- Drainage Improvements in 2018
- Select Flooring Replacements in 2020

EDUCATIONAL SUITABILITY

- The general classrooms meet 80% of the size guideline with limited access to spaces that support flexible learning.
- The music room lacks acoustical treatments.
- A converted general classroom is used for art instruction.
- A cafegymatorium (with stage) is present, limiting the use of the space.
- The layout of the servery area in the cafeteria creates congestion.
- Entrances are not well controlled.

EDUCATIONAL PROGRAM FORECAST

High Priority

- Accessibility upgrades to allow all students to enter the building via the main entry and navigate all essential programming within the building.
- Re-purpose space to create an art exhibition area.
- Security projects, including new classroom door locks and improvements to the security / alarm system.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln (Note: art is currently taught in a general classroom)..

Moderate Priority

- Add an outdoor covered play structure or construct/re-purpose a structured movement room (2,000 SF) to support P.E. instruction.
- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
- Invest in facilities upgrades to support project-based learning activities.

Lower Priority

- Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
- Expand P.E. storage by repurposing space and/or adding casework.
- Allocate instructional, office, and meeting space for Virtual Scholars.

K-8 SCHOOLS

ASTOR K-8 SCHOOL

ADDRESS
5601 N YALE ST

CONSTRUCTION DATE
1949 (PRIMARY)

LEVELS
1

BLDG AREA
49,434 SF

SITE AREA
175,111 SF
4.02 ACRES

CLASSROOMS COUNT
26

FUNCTIONAL CAPACITY
559 STUDENTS

CLUSTER
ROOSEVELT

MODULAR CLASSROOMS
4

ZONING
OS - OPEN SPACE CU

HISTORICAL SUMMARY

The Astor K-8 School is situated in the residential neighborhood of University Park in North Portland. Built in 1949, the Northwest Regional style school building is situated on a grass and asphalt-covered campus. Directly northeast of the school is an asphalt-covered playground with a covered play shed. The building is a one-story with a wood frame.

The H-shaped mass of the school is oriented on a north-south axis and rests on a poured concrete foundation. The wood frame building is clad with vertical board and batten siding. Shallow pitched gable roofs cover the two parallel wings of the single story building. The finger plan facilitates direct access to the playground and other outdoor spaces from the classrooms.

The school was built in response to the residential development in North Portland during the PPS program of post-war construction and is eligible for the NRHP under Criterion A.

RESJ CONSIDERATIONS

Astor's student population is largely reflective of district-wide averages for K-8 schools:

- For the 2021-22 school year, 36% of students are historically underserved, slightly greater than the K-8 school mean (29%).
- For the 2021-22 school year, 21% of students qualified for free or reduced lunch, slightly above the K-8 school mean (19%).

ENROLLMENT & UTILIZATION

For the 2021-22 school year, Astor K-8 is forecast at 72% utilization. By the 2030-31 school year, utilization is projected to decrease to 60%.

FACILITY CONDITION SUMMARY

Astor K-8 School is 72 years old, and in poor condition with a facility condition index (FCI) score of 0.16. As the average FCI score for K-8 schools in PPS is 0.16, the building is typical of other K-8 schools in the district.

Facility condition assessments conducted in 2019-20 revealed the following deficiencies:

Mechanical & Plumbing

- The domestic water boiler and storage tank were replaced in the 1990s and observed to be in average condition.
- The majority of HVAC equipment was original to facility construction.
- The plumbing fixtures had no deficiencies observed. The domestic water piping and sanitary waste piping were not visible for assessment, but had no deficiencies reported.
- The AC units utilized R22 refrigerant which is being phased out of use.

Fire Protection

- The school had a wet pipe sprinkler system that served only the stage area.
- The fire alarm control panel and alarm devices had no deficiencies observed.

Electrical

- The electrical distribution equipment had no deficiencies observed. Distribution branch wiring and grounding systems were not visible for assessment, but had no deficiencies reported.

Arch/Struct/Site

- In the north addition, the aluminum window frames were moderately deteriorated with bent frames and many errant screw holes.
- The VCT flooring in the cafeteria had stress cracking throughout.
- The majority of the interior finishes had exceeded their design lives.

RECENT CAPITAL EXPENDITURES

- Lead Paint Abatement in 2017
- Radon Mitigation in 2018
- Wireless Upgrades in 2018
- Select Flooring Replacements in 2020
- Fire Alarm Upgrades in 2020

EDUCATIONAL SUITABILITY

- There are few designed spaces to support differentiated learning. Most areas lack flexible break-out space.
- The SPED classroom is undersized (70% of size standard) and lacks a dedicated ADA restroom. Students must use a staff restroom across the hall. A large Learning Resource Center is present.
- Three (3) STEM classrooms are provided. All are equipped with appropriate sinks and casework. Two of the rooms have overhead power. One of the classrooms has inadequate ventilation. No formal art classroom is present.
- The music room is located in a portable building.
- The gym is undersized (66% of size standard).
- The cafeteria is adequately sized with a small stage.
- The school does not have a buzzer/camera at the front door and there is no active supervision of the door from the office.

EDUCATIONAL PROGRAM

FORECAST

High Priority

- Re-purpose space to create an art exhibition area.
- Re-purpose an existing space into a sensory motor room.
- Incorporate recommendations of PPS' All Gender Task Force, including restrooms.
- Re-purpose existing space to provide a Family Resource Center with kitchen equipment.
- Provide new flexible classroom furnishings and student seating options to allow teachers to easily reconfigure spaces to accommodate a variety of activities.
- Create an outdoor learning area to support STEM instruction and project-based learning.
- Renovate an existing space to provide a minimum of one (1) multipurpose SPED focus classroom, equipped with and an accessible restroom per the district's Educational Specifications.
- Re-purpose existing space to provide a dedicated music classroom configured and equipped per current Ed Specifications. Music is currently taught in a portable classroom.
- Facilities upgrades to provide a dedicated visual arts space configured and equipped per current Ed Specifications with a working, properly ventilated kiln.

Moderate Priority

- Re-purpose an existing space into a wellness room.
- Allocate an area for a Reconnection Services office.
- Renovate the main entry to align

with the district's Educational Specifications. This may require renovation and/or relocation of the main office to provide direct visual supervision of the main entry.
» Invest in facilities upgrades to support project-based learning activities.

Lower Priority

» Modernize school to support new approaches to teaching and learning, emphasizing project-based learning, differentiated instruction, collaboration, and team teaching.
» Expand P.E. storage by repurposing space and/or adding casework.
» Allocate instructional, office, and meeting space for Virtual Scholars.

BEVERLY CLEARY - FERNWOOD K-8 SCHOOL

ADDRESS
1915 NE 33RD AVE

CONSTRUCTION DATE
1911 (PRIMARY)

LEVELS
3

BLDG AREA
88,815 SF

SITE AREA
186,001 SF
4.27 ACRES

CLASSROOMS COUNT
28

FUNCTIONAL CAPACITY
555 STUDENTS

CLUSTER
GRANT

MODULAR CLASSROOMS
0

ZONING
R5 RESIDENTIAL 5,000 CU

HISTORICAL SUMMARY

Situated in the Grant Park neighborhood of East Portland, the Fernwood K-8 School campus consists of a 1911-1924 U-shaped building with a large 1978 addition. The main building retains Classical Revival-style elements and is two-stories in height with a lighted basement. It is a reinforced concrete building with brick veneer. Ornamentation includes decorative brickwork, terra cotta belt courses, and terra cotta tiles. Other ornamentation includes pronounced terra cotta cornices and flat roofs with terra cotta caps along the parapets. Bands of aluminum windows provide the fenestration. The main entrance is marked by double doors, a terra cotta segmental pediment, and columns. Double loaded corridors provide access to the administrative offices, classrooms, and recreation spaces.

The Grant Park neighborhood consists of single family residences built primarily between 1920 and 1950. Play areas and open space occupy the western end of the campus and are sited to the north of NE Hancock Street.

The Fernwood Middle School does not have integrity of design and materials to consider it eligible for listing in the National Register of Historic Places.

RESJ CONSIDERATIONS

Facility improvements would not be significantly impactful to underserved communities, as Fernwood serves a less diverse student population with relatively low poverty levels compared to the district average.

» For the 2021-22 school year, 13% of students are historically underserved, well below the K-8 school mean (29%).
» For the 2021-22 school year, 5% of students qualified for free or reduced lunch, significantly below the K-8 school mean (19%).

ENROLLMENT & UTILIZATION