bainbridge. | MAKERS | MACKENZIE.

Portland Public Schools

PPS - Administration and Operations
PEC Space and Programming Evaluation

April 23, 2025

@2025 Mackenzie Engineering Inc. Unless noted, all text, video recordings, photos, drawings, computer generated images and/or statements are owned by Mackenzie and protected by copyright and/or other intellectual property laws. No part of these pages, either text or image may be reproduced, modified, stored in a retrieval system or retransmitted, in any form or by any means, electronic, mechanical, or otherwise without prior written permission. Mackenzie®, and M.™ and all corresponding logos and designs are service marks and/or registered service marks of Mackenzie Engineering Inc. All rights reserved.

The information in this document has been obtained from sources believed reliable. Our findings have been based on limited information and on-site observation. Because of the limited scope of our initial review, these preliminary findings should not be used as a principal basis for any decision relating to the site and/or building, and confirmation of the information contained within this document with the applicable government body may be necessary.

TABLE OF CONTENTS

INTRODUCTIONS

Project Team 00-ii
Project Scope 00-iv

EXECUTIVE SUMMARY

Key Findings: Phase I 01-02
Key Finding: Phase II 01-04
Recommended Next Steps 01-11

PHASE I A

Peer District Interview and Tours 02-01
- Seattle School District 02-02
- Beaverton School District 02-06
- Edmonds School District 02-10
- San Francisco School District 02-14
- Sacramento School District 02-16
- Salem-Keizer School District 02-18

Focus Groups Discussion 02-20
- Summary 02-20
- Results 02-21

PHASE I B

Department Interviews Summary 03-03
- Administration Interview Summary 03-04
- Shop Interview Summary 03-05
- Warehouse Interview Summary 03-06

PEC Space and Programming Report Recommendations Summary 03-09
- Program Matrix - Scheme 1 03-12
- Program Matrix - Scheme 2 03-13
- Program Matrix - Scheme 3 03-14

Property Search Recommendations 03-16

APPENDIX (PROVIDED AS A SEPARATED DOCUMENT)

Appendix 1: Consultant Biographies
Appendix A: PEC Space and Programming Evaluation Details
Appendix B: Assumptions for PEC Space and Programming
Appendix C: Existing Prophet Center Plans for Generating Gross Square Footage
Appendix D: Programming Questions
Appendix E: Mackenzie Memorandum - PPS PEC Operations Facility Zoning Requirements
Appendix F: Mackenzie Memorandum - PPS PEC Structural Requirements

THIS PAGE INTENTIONALLY LEFT BLANK

Introductions



PROJECT TEAM

PORTLAND PUBLIC SCHOOLS

- Dan Jung
- Dana White
- Kristen Cowden
- Julie Roeder
- Joanna Evenson

ALBINA VISION TRUST

- Carly Harrison
- Micah Greenberg

MACKENZIE

- Jeff Humphreys
- Cathy Bowman
- Seth Bradshaw
- Quincey Gerow

BAINBRIDGE ARCHITECTS

- Marisa O'Gorman
- Rachel Becker

MAKERS

- Beth Batchelder
- Diego Rodriguez
- Julie Bassuk

RAYOND WEST

- CJ Hilliard

PROJECT SCOPE

On February 20, 2024, the Board of Education passed Resolution 6861 as adopted, which authorized the Superintendent to direct staff to prepare for the sale of the Prophet Education Center (PEC) and relocate functions via a series of transactions that would be “all-in cost neutral” to the Portland Public School District (District or PPS). In response to the resolution, staff engaged a consultant team comprised of Bainbridge, Mackenzie, MAKERS, and Raymond West to update required adjacencies and minimum criteria for maintenance and operations functions; and Bainbridge to update required adjacencies and minimum criteria for administration functions.

This project is divided into two phases:

- Phase 1A (Discovery) is focused on researching, interviewing, and touring peer districts to understand operations and compare facility use and operations.
- Phase 1B (Visioning) updates current and future space needs and required adjacencies, develops a conceptual layout for a future facility.

The final deliverable will be space and programming recommendations and a timeline that will inform a property search, selection, ad District relocation.

THIS PAGE INTENTIONALLY LEFT BLANK

Executive Summary



EXECUTIVE SUMMARY

KEY FINDINGS - PHASE 1A

Best Practices Study of Peer Districts

The consultant team researched over 10 districts with the following goals:

- Learn how peer organizations site, size, and design administration and maintenance and operations (M&O) facilities
- Highlight trends, exemplary practices, and lessons learned relevant to the District
- Inform potential adjustments to adjacencies and space and programming assumptions

The following six districts were chosen based on their size, urban context, and facility age or because they have recently modernized facilities. All six districts were interviewed and three were selected for tours. Interviews focused on a variety of topics, including facility siting, adjacencies, and space needs for administration and maintenance and operations functions. **Seattle was highlighted as the most similar to PPS based on number of students and schools**, San Francisco and Sacramento were also noted to be similar.

	PPS	SEATTLE	SAN FRANCISCO	SACRAMENTO	SALEM-KEIZER	BEAVERTON	EDMONDS
STUDENTS	44,000	49,000	49,000	41,000	39,000	38,000	21,000
SCHOOLS	81	104	132	75	65	56	34
TOURED		Y				Y	Y
ADMIN FACILITIES	JOINT ADMIN / M&O/ WAREHOUSE FACILITY	JOINT ADMIN / M&O/ WAREHOUSE FACILITY	2 MAIN ADMIN 8 ANCILLARY ADMIN	1	3	1	1
MAINTENANCE FACILITIES	2 ADMIN / WAREHOUSE FACILITY	2 ANCILLARY WAREHOUSES (PLANS TO CONSOLIDATE TO 1)	MAINTENANCE / WAREHOUSE CAMPUS	MAINTENANCE SITE	1 WAREHOUSE / MAINTENANCE CENTER	MAINTENANCE CAMPUS	MAINTENANCE / TRANSIT HQ
WAREHOUSE FACILITIES	1 TRANSPORT-ACTION FACILITY			1 HQ 1 CENTRAL KITCHEN / WAREHOUSE	1 IT FACILITY 1 NUTRITION SERVICES	2 TRANSPORTATION / WAREHOUSE	1
FACILITY DISTANCE	N/A	N/A	2.75 MILES MAIN ADMIN - M&O	5.25 MILES ADMIN - M&O	2.25 MILES ADMIN - M&O	1.6 MILES ADMIN - M&O	1 MILE ADMIN - M&O
				5 MILES M&O-WAREHOUSE	2 MILES M&O-NUTRITION	1.75 MILES M&O-WAREHOUSE	1 MILE M&O-WAREHOUSE
TOTAL EXISTING NET SF:	339,636	361,595					
OPERATIONS FACILITY NET SQUARE FOOTAGE							
	EXISTING SF / RECOMMENDED SF	EXISTING SF / IDEAL SF	EXISTING SF / IDEAL SF	EXISTING SF / IDEAL SF	EXISTING SF / IDEAL SF	EXISTING SF / IDEAL SF	EXISTING SF / IDEAL SF
MULTI-CRAFT SHOP	15,654 / 6,800	11,500 / 8,500	N/A	18,511 / 16,000	4,100 / 4,100	3,300 / 3,300	7,500 / 7,500
MECHANICAL SHOP[1]	16,993 / 10,625	18,852 / 5,200	N/A	6,653 / 8,000	10,000 / NOTED AS INADEQUATE	2,700 / 2,700	6,100 / 6,100
ELECTRICAL SHOP	12,526 / 2,975	4,000 / 3,000	N/A	3,611 / 1500		4,900 / 4,900	600 / 600
MUSIC SHOP	8,054 / 1,403	2,056 / 2,000[2]	N/A	N/A	N/A	N/A	N/A
WAREHOUSE	98,807 / 85,300	85,000 / 65,000[3]	112,000 / MORE NEEDED	70,000 / 70,000	26,000 / 60,000	27,800 / 27,800	9,600 / 23,000
NUTRITION SERVICES	25,296 / 22,768	29,000 / 23,000	OUTSOURCED	33,000 / 33,000	21,000 / 21,000	OUTSOURCED / NEED FOR CENTRAL KITCHEN	700 / CENTRAL KITCHEN IN EACH SCHOOL
PARKING	54,000 / 78,000	151,000 / 85,000	113,000 / 85,000	415,000 / 88,000	228,000 / 110,000	200,000 / 58,000	158,000 / 41,000
TOTAL EXISTING NET SF:	**177,330**	**150,408**					

[1] PPS - Mechanical Shop includes Plumbing, HVAC, Sheet Metal Shop, Machinist & Metal Shop. Seattle has reduced their Mechanical Shop as they are funded to replace mechanical units, boilers, etc. in lieu of fixing, They also do not include metal shop in the mechanical shop area.

[2] Seattle has reduced their required square footage for music shop by storing instruments at individual schools.

[3] Seattle does not store or compile science kits in their warehouse.

EXECUTIVE SUMMARY

Major Themes

Key findings from peer district interviews and site tours around location and number of facilities, administrative space standards, maintenance and operations spaces, and funding are summarized below.

Location and Facility Numbers

- In all but one district, co-location of administrative and operational functions was seen as ideal. If co-location was not possible due to space constraints, headquarters functions were often grouped in multiple locations.
- Multiple locations increase operating costs and impact communication and organizational cohesion.
- A central location is critical to operations, preferably with proximity to freeways for efficient district-wide access.
- Parking is a priority. All peer districts interviewed aside from San Francisco have ample, free parking for staff and visitors. Many are also close to transit.

Administrative Spaces

- Each staff is provided a workspace. None of the peer districts follow a shared workstation model, even when some remote or hybrid work is allowed.
- Space standards are beneficial. All peer districts saw benefit in standardization and intentional space planning to promote flexibility as departments grow or shrink in size and the workplace evolves.
- Enclosed meeting space is essential. Conference rooms and private phone rooms are critical for collaboration and virtual meetings.
- Open or flex space does not work. Open collaboration spaces were typically seen as disruptive or underutilized.

Maintenance and Operations Spaces

- The PPS food service central distribution model was viewed as ideal. Nutrition services space varies between a full-service central kitchen to outsourced food production and delivery.
- Peer district trades and warehouse space is smaller than at the District. Warehouse space depends on multiple factors, including storage system efficiency, inventory/surplus practices, and available storage in schools or other facilities.
- Dedicated shops are most common, though Salem-Keizer and Edmonds have shared shop spaces with dedicated storage.
- Shared shop designed to be flexible, depending on staff size and workload, is an exemplary practice.
- Music repair is outsourced in most districts, with the exception being Seattle.
- The approach to maintaining schools can influence headquarters shop size, as maintaining a variety of existing systems requires more storage than an approach that replaces all parts and systems with consistent selection.
- Peer district research indicates that other districts have smaller shops than PPS.

Funding

- Bond and/or levy funding is used by Seattle and Beaverton to support facilities operations.
- Bond staff are embedded with other operations, such as maintenance and real estate

THIS PAGE INTENTIONALLY LEFT BLANK

EXECUTIVE SUMMARY

KEY FINDINGS - PHASE 1B

Summary of Project Scope

The objective of Phase 1b was to further refine the minimum square footage criteria needs for administrative office space and the operations/ warehouse spaces. This phase built upon the insights gathered during Phase 1a, including best practices and lessons learned from peer district tours and interviews. Additionally, previously completed reports were referenced to incorporate relevant information and avoid duplicative efforts.

A highlight of the scope of work completed by Bainbridge and Mackenzie are as follows:

- Conducted interviews with all Chief's and/or department representatives
- Verified existing office and storage space and identified other misc. needs
- Discussed operational impacts with each department should a future facility be split into two separate sites (Administration/Operations)
- Created programming sheet for each Chief/ Department identifying staff counts, types of workspaces, and required support spaces. A programming sheet was also created for the required shared spaces. (i.e. Board Room, Professional Development/Event spaces, Mother's Rooms, etc .). These sheets can be found in the Appendix of the full report draft.
- Identified satellite and hoteling spaces required by departments if split into two sites

Bainbridge and Mackenzie collaborated closely with PPS to develop targeted programming questions aimed at confirming departmental staff counts and identifying space needs based on key findings from Phase 1a. The consultant team were requested to work with the current staff counts, as of March 2025 (without increase or reduction). Future growth or any changes to current operations were not accounted for in the space and programming evaluation. These questions, along with data collected in Spring 2024 and a summary of the Phase 1a Focus Group meeting, were shared with each department Chief in advance of in-person meetings.

During these programming interviews, PPS and the consultant teams reviewed the programming questionnaires, gathered detailed information, and toured existing spaces to assess current conditions and uncover potential opportunities for improvement. A key focus of these discussions was understanding how a potential physical separation between administration and operations could impact departmental workflows and explore potential efficiencies. While off site departments and storage facilities were evaluated to establish an overall big picture, these spaces were excluded from the reccomended square footage.

The information gathered was compiled into a comprehensive programming spreadsheet that detailed each department's staff counts, workspace types (e.g., private offices vs. workstations), storage needs, and required support spaces necessary for efficient, high-quality operations. (See Appendix A) Standardized square footage allocations were applied to each space type to determine the total usable area required per department.

In parallel, PPS and the consultant team developed a programming sheet for shared spaces should the facilities be separated into two facilities (Operations and Administration), including the lobby, board room, conference rooms, and other supportive or code-required areas not assigned to specific departments.

These detailed programming sheets served as the foundation for creating three potential schemes/ scenarios to address the district's future real estate needs.

Summary of PEC Space and Programming Evaluation Report

The three schemes that were evaluated are the following:

Scheme 1 – A combined administration and operations facility, like the PEC with improved efficiencies.

Scheme 2 – Two separate facilities, one for Administration and one for Operations. The operations facility will be primarily shops, warehouse space, and nutritional services, and excludes administrative staff that have preference of being located at the operations facility.

Scheme 3 – Two separate facilities, one for Administration and one for Operations with each department located at their preferred facility. The following is a breakdown of departments at each facility:

- Administration Facility
  - Superintendent
  - Chief of Staff
  - Chief Financial Officer
  - General Counsel
  - Chief of Human Resources
  - Chief Accountability and Equity Officer
  - Chief Academic Officer
  - Chief of Student Success Services
  - Chief of Schools

- Operations Facility
  - Fabrication & Shop; Maintenance (COO)
  - Nutritional Service (COO)
  - Warehouse (COO)
  - Chief Operating Officer (COO)
    - Office of School Modernization (OSM)
    - Security Services
    - Real Estate & Construction (REC)
  - Office of Technology Information Services (OTIS)

	STAFF COUNT	CURRENT GROSS SF	MIN GROSS SF	PERCENT REDUCTION
SCHEME 1				
SINGLE SITE	691	339,636	278,557	18%
SCHEME 2				
ADMINISTRATION	577	115,218	113,544	1.5%
OPERATIONS CENTER	114	224,418	168,121	25%
TOTAL	691	339,636	281,665	17%
SCHEME 3				
ADMINISTRATION*	419	189,106	91,369	-2.5%
OPERATIONS CENTER	272	250,530	190,395	24%
TOTAL	691	339,636	281,764	17%

* Scheme 3 does not permit opportunities for sharing some of the large Administrative Support Spaces such as the Professional Development/Event and Large Conference Rooms accommodating 20-25+ people. Therefore these rooms have been allocated to Administration in lieu of Operations to eliminate duplication of spaces.

EXECUTIVE SUMMARY CONT.

The recommended range for each of the three different schemes to aid in a property search analysis are as follows. Please note that the range is rounded to the nearest thousand.

Scheme 1 –

- Combined Facility - 279,000 SF - 307,000 SF

Scheme 2 –

- Administration Facility with Operations Staff - 114,000 SF - 125,000 SF
- Operations Facility without Operations Staff - 168,000 SF - 186,000 SF

Scheme 3 –

- Administration Facility without Operations Staff - 96,000 SF - 106,000 SF
- Operation Facility with Operations Staff - 191,000 SF - 210,000 SF needs.

After completion of the programming schemes, Portland Public Schools preference is to remain in a similar model as the existing Prophet Center, Scheme 1, where all departments are co-located in one facility. With the understanding that a site/ property that can accommodate a unique program such as Portland Public Schools – Administration and Operational needs is limited. The second preferred scheme is Scheme 3, with select departments located at the Operations Facility.

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

NEXT STEPS

The consultant team's recommendations for Portland Public Schools are as follows:

Identify Potential Sites/Properties for Purchase and Test Fit the preferred Scheme for the Site/Property.

- Once PPS has identified potential sites / properties that they feel meets the minimum criteria, it is encouraged that the District have the consultant team complete a test fit to ensure that all program elements identified in the PEC space and programming evaluation will fit within the space. Identify advantages and challenges to each potential site/property before making a final purchase.

Complete a cost estimate of each test fit completed

- Once the consultant team has provided a test fit conceptual design for each site/property a comprehensive cost estimate should be completed by a cost estimator. The cost should not only include the cost of the construction but also soft costs, which are inclusive of consultant fees for design services, surveys, permitting, furniture, fixture and equipment (FF&E), moving costs, etc.

THIS PAGE INTENTIONALLY LEFT BLANK

PHASE I A - DISCOVERY
Best Practice of Peer Districts



FACILITY TOUR - SEATTLE

SEATTLE PUBLIC SCHOOLS

Seattle Public Schools (SPS) was chosen due to having a similar size and urban context to PPS, in addition to having the closest facility match. SPS has 49,000 students across 104 schools. Their administrative and M&O functions are co-located in a single 350,000 ft2 building (John Stanford Center of Educational Excellence), much like the Prophet Education Center. SPS has two ancillary warehouse sites for surplus storage that will soon be consolidated to one. The team interviewed leadership from across SPS departments and toured their headquarters.



Fig 1. John Stanford Center



Fig 2. Music Shop



Fig 3. Electrical Shop



Fig 4. Kitchen



Fig 5. Warehouse


Fig 6. Warehouse Staging


Fig 7. Loading Dock

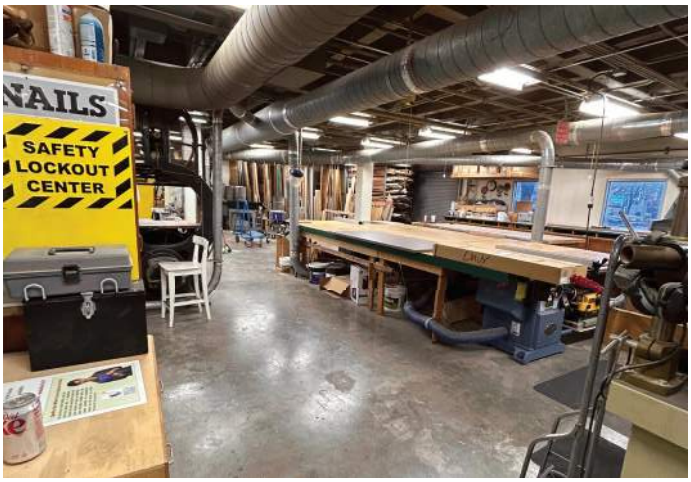


Fig 8. Paint Shop

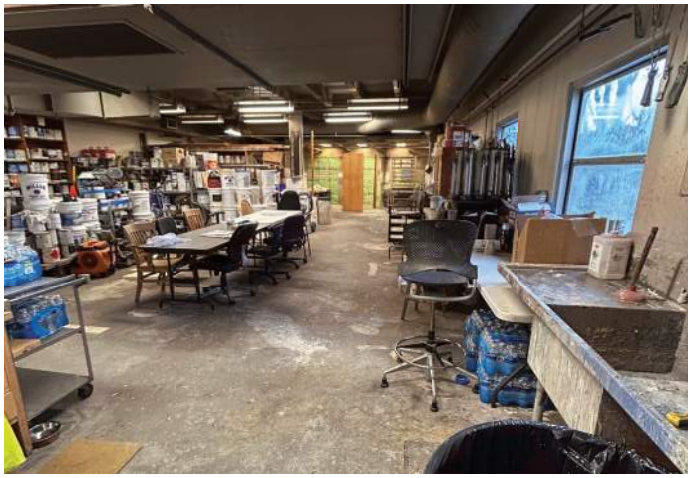

Fig 9. Carpentry Shop


Fig 10. Boardroom

FACILITY TOUR - SEATTLE



Fig 11. Typical Enclosed Rooms



Fig 12. Typical Open Office



Fig 13. Typical Open Office



Fig 14. Typical Workstation

FACILITY INTERVIEW - SEATTLE

Siting and Adjacency

- Having a single site is beneficial to relationships between administration and M&O departments, even allowing the superintendent to maintain face-to-face connections with staff. M&O departments appreciate easy access to supportive services from administrative departments like HR, payroll, and legal.
- Having a single site is challenging when managing the staff/visitor parking overlap with fleet parking and maintenance/delivery vehicle circulation.
- SPS would consider adding a satellite maintenance facility in North Seattle to better serve schools farthest away from the headquarters, but have chosen to remain co-located.
- SPS headquarters is located near major highways and transit routes, which helps reduce parking demand for staff but more importantly improves access for families and visitors.

**SPS noted that the consolidation of sites means fewer buildings to monitor and maintain. It is also beneficial for implementing safety and security measures.*

Maintenance and Operations

- SPS divides their maintenance crew shifts on an 80:20 night/day schedule, reserving the day for emergency work and the night for scheduled maintenance. This reduces their windshield time and eases staff parking demand.
- SPS utilizes both their in-house maintenance team and contractors to cover district wide maintenance. They appreciate the flexibility provided by access to both options.
- SPS is the only district the team interviewed that has an in-house music repair program. Their shop is slightly smaller than PPS with no additional storage space; it was described as too cramped for their need.
- SPS tries to limit the storage of old or reused parts, preferring to replace with new parts and systems when possible. Their shops are designed to be flexible to be rearranged to suit different teams and needs.
- When SPS consolidates their ancillary warehouses, they will be reducing storage space from 40,000 ft2 to 20,000 ft2. The warehouses currently dedicate 10,000 ft2 to Capital Projects & Planning, equipment, furniture, and technology, and 30,000 ft2 to surplus.
- SPS recently renovated their central kitchen space, however it could be reduced by 25% (~23,000 ft2) due to continually evolving operations.

Administration

- When SPS moved into the JSC (John Stanford Center) in 2002/2003 the Admin space was planned with enclosed spaces at the core and workstations along the perimeter to maximize natural light. Private offices were designated for managers and above and other enclosed rooms were utilized for storage and conference space.
- The original standardized workstation layout remains largely unchanged, however, SPS noted staff space would benefit from lower panel heights and station sizes could be reduced to increase capacity if/when needed.
- Location breakdown/adjacencies for Admin departments
  - 3rd Floor – Teaching and Learning, HR, Finance, Legal, Finance, Superintendent and Chiefs
  - 2nd Floor – Facilities, Maintenance, Real Estate & Construction, IT, Training, Transportation and shops
  - 1st Floor – Legal, Accounting, Purchasing, Security and Boardroom
- Most meeting rooms can be scheduled by all staff/departments. There are very few dedicated conference rooms. SJC Identified need for more small private rooms for internal meetings/virtual calls since larger meeting rooms are usually occupied
- Originally leadership did not want a library/s of Curriculum Materials as part of the admin space, however, these areas are now on the 3rd floor and take up all common space which was previously under-utilized.
- Most employees are assigned a dedicated workspace except for IT which has remained partially remote.

FACILITY TOUR - BEAVERTON

BEAVERTON SCHOOL DISTRICT

Beaverton School District (BSD) was selected as a peer district because of its geographic adjacency and recently remodeled headquarters. BSD has 49,000 students across 56 schools. They have four main sites that support their administration and M&O functions, three of which are located within two miles of one another: a new administration headquarters (2021), a maintenance campus, and a transportation maintenance center with warehouse capacity. They have an additional transportation yard with warehouse capacity across the district. The team interviewed Steven Sparks, the Executive Administrator for Long Range Planning and toured the maintenance campus and administration headquarters.



Fig 15. Beaverton Maintenance Yard

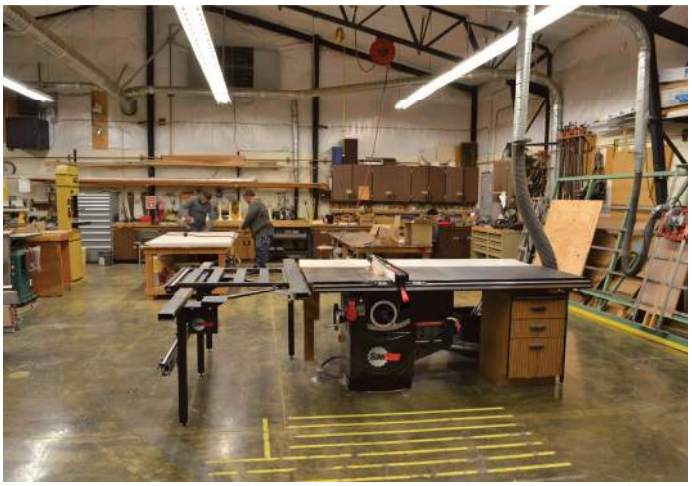


Fig 16. Carpentry Shop



Fig 17. Shop Parts Storage

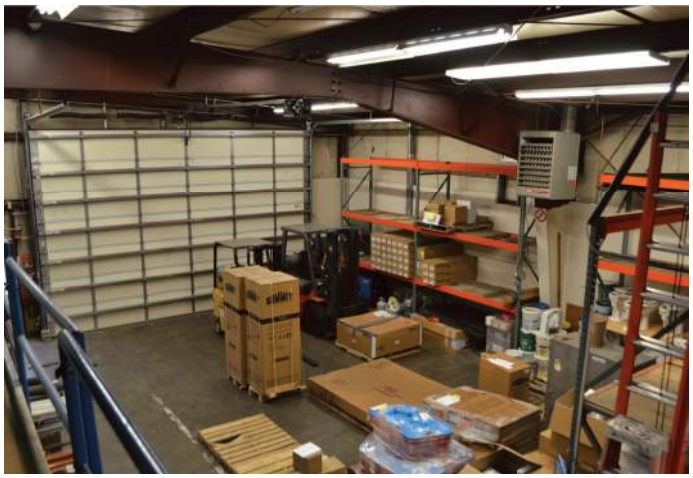


Fig 18. Building One Warehous



Fig 19. Machine Shop



Fig 20. Building Two Warehouse

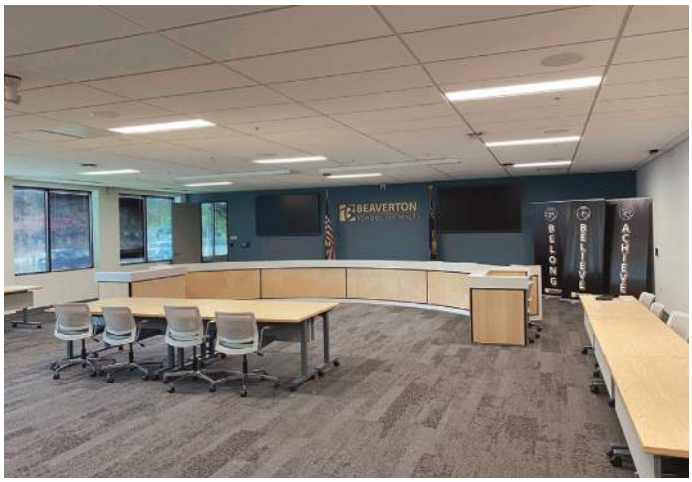


Fig 21. Boardroom



Fig 22. Multipurpose Training Room



Fig 23. Open Collaboration Area



Fig 24. Shared Breakroom

FACILITY TOUR - BEAVERTON

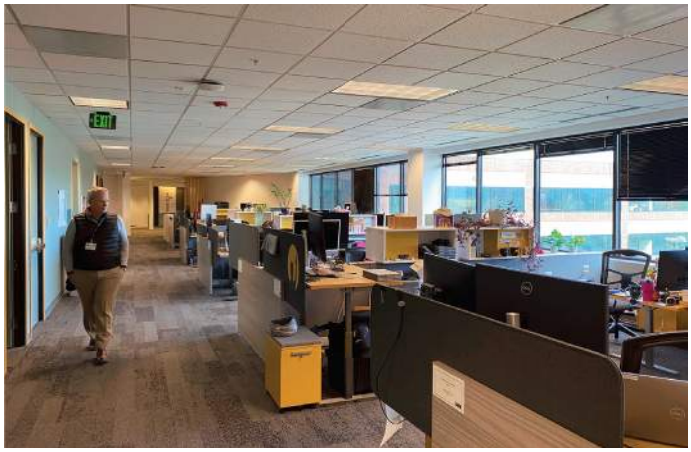


Fig 25. Typical Open Office

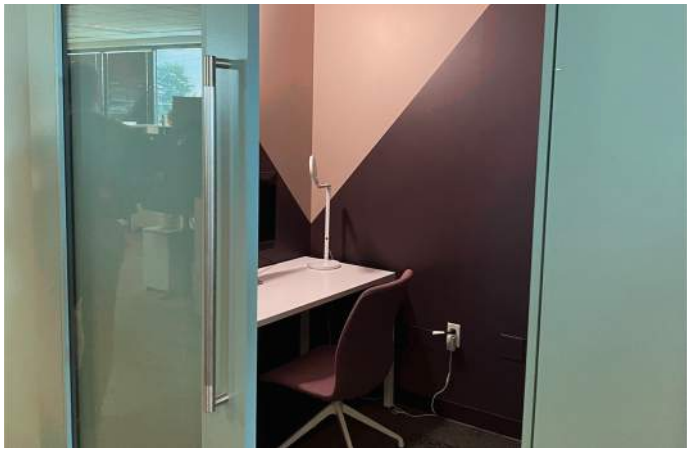
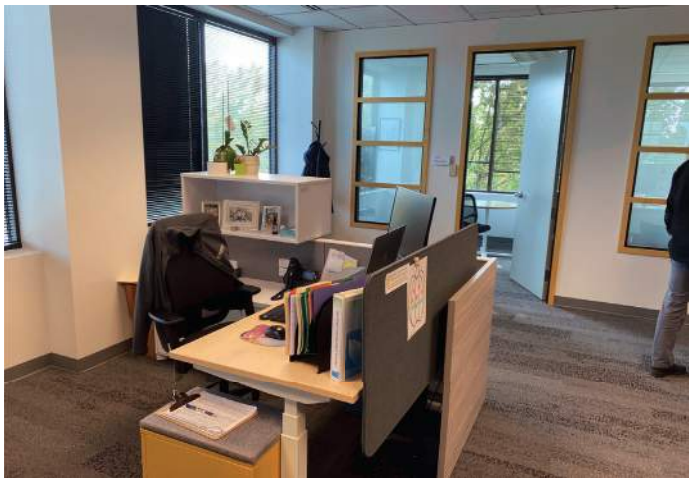

Fig 26. Typical Phone Room


Fig 27. Typical Shared Staff Break/Copy Area


Fig 28. Typical Workstation

FACILITY INTERVIEW - BEAVERTON

Siting and Adjacency

- Administrative departments located in an adjacent building to the BSD M&O campus include property managers, bond, and facility project managers.
- Most other administrative departments were consolidated into the newly acquired administration headquarters.

Maintenance and Operations

- BSD delivers directly to and stores many items at schools throughout the district, resulting in a smaller storage footprint at the maintenance campus.
- The district would like to shift towards a central warehouse (similar to PPS), in which case they would need a roughly 20,000 ft2 facility. Currently the warehouses are split between long- and short-term storage needs with furniture, athletic equipment, and many other supplies stored at schools.
- BSD is developing storage standards for each school and redeveloping a transportation facility to be able to store surplus furniture and relieve excess storage at the schools.
- BSD has funds to replace most systems instead of repairing existing structures, which often requires additional parts storage. Because of this, their shop space is much smaller.
- Nutrition services has a small test kitchen and outsources most food production for the district for an additional cost.

Administration

- The 2021 relocation to administrative headquarters was an opportunity to consolidate multiple departments and separate “back of house” from Administrative functions.
- IT and Library Services could not relocate due to lack of a loading dock.
- To reduce the square footage needed for the new site, the district recommended digitizing paper records and applying space standards; 6x8 typical workstations, approx. 4x6 for staff who spend time in schools (such as Teaching and Learning).
- BSD utilized the existing offices in their new building which dictated the size for newly built offices.
- Initial planning took place in 2020 when hybrid/remote work was prevalent, so BDS considered unassigned workspaces but as planning progressed BDS shifted to mostly dedicated workspace. Space is assigned 1:1 if staff is in office 3+ days. This is the majority except for IT who is primarily remote.
- When converting the old Admin building, BSD was able to create a large conference center which works well for Professional Development, training and large meetings.
- Lessons learned included-
  - Felt they were too concerned with making the space feel super open – workstation panels are too low, lack of privacy, open office space is very loud, staff complain about distractions. BDS ended up building out more spaces for private work/collaboration areas after move-in.
  - Open collaboration spaces aren’t used as much as they envisioned – mostly used for lunch/break areas

FACILITY TOUR - EDMONDS

EDMONDS SCHOOL DISTRICT

Edmonds School District (ESD) is smaller than PPS with 21,000 students across 34 schools but was chosen to highlight a newly constructed maintenance and operations facility. The district has three sites that support their administrative and M&O functions, all within a mile of one another: an administrative headquarters, a new maintenance and transportation facility (2015), and a small warehouse. The team interviewed Nick Chou and Will Thomsen, design and construction managers for the new M&O facility and toured their maintenance facility.



Fig 29. ESD Maintenance & Transportation Facility



Fig 30. Parts Storage

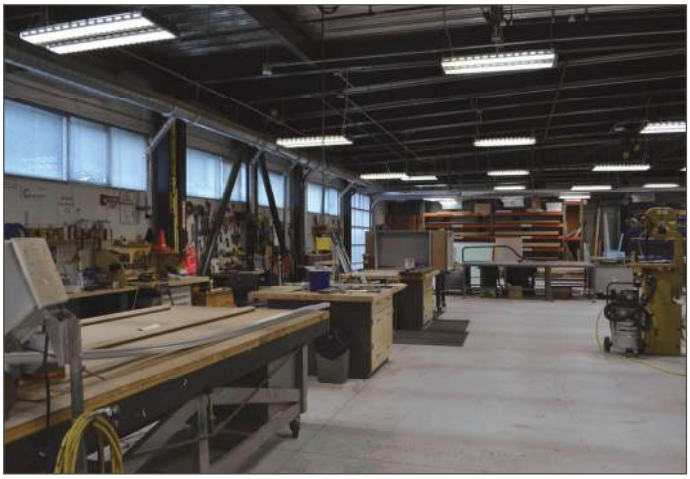


Fig 31. Carpentry Shop



Fig 32. Carpentry Shop

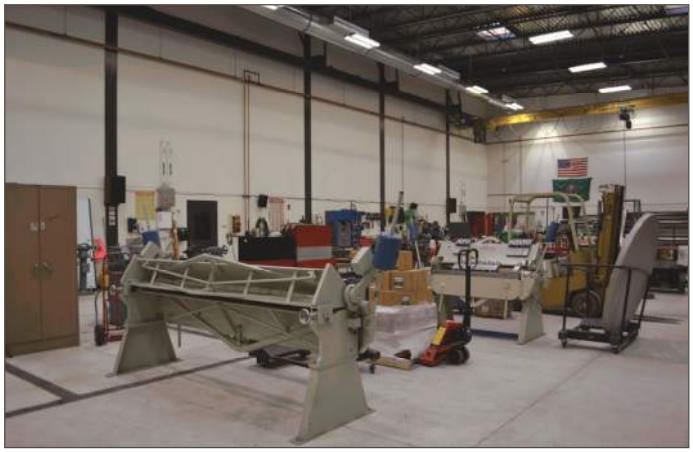


Fig 33. Machine Shop

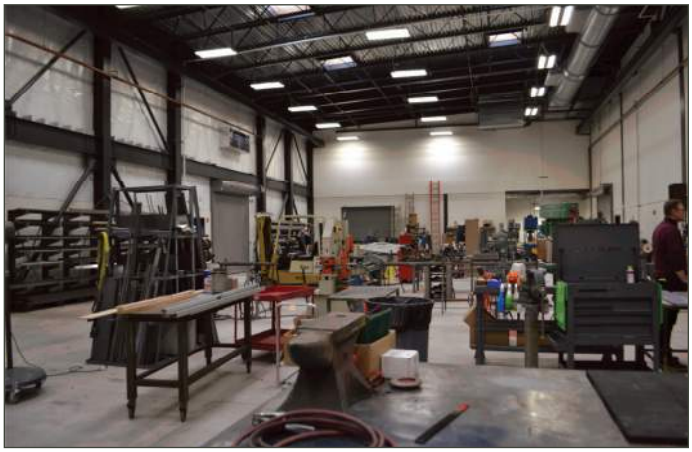


Fig 34. Machine Shop

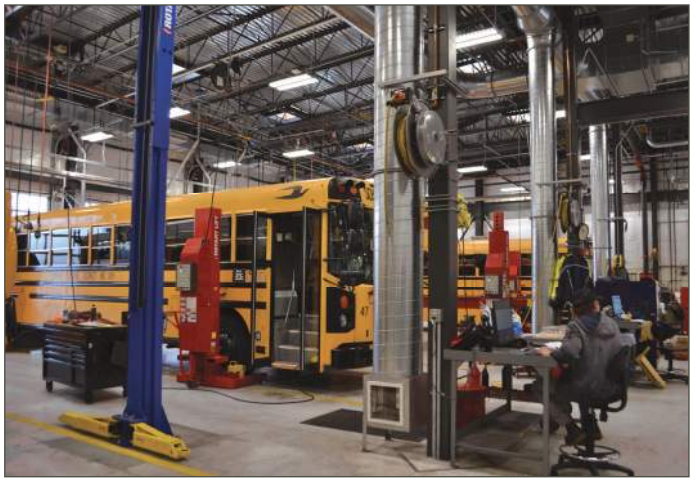


Fig 35. Vehicle Repair

FACILITY INTERVIEW - EDMONDS

Siting and Adjacency

- Construction on the new maintenance and transportation facility began with site work in 2007 ($4-5 million) and finished with facility construction in 2015 ($30 million). Funding was obtained through a bond that included renovations for most schools in the district to help support its passage.
- Combining operations and maintenance with vehicle repair has been invaluable to the efficiency of maintaining ESD's fleet.
- ESD has noticed maintenance and operations staff can feel disconnected from administration due to having separate sites and acknowledge a single site would be ideal if given funds and adequate property.
- The district hopes to add a warehouse to their current site as the current warehouse is across the freeway and difficult to easily access.

Maintenance and Operations

- ESD shops are highly flexible in design to respond to change over time in operational practices, district wide policies, technology, and other factors.
- The district allocated extra shop space to account for future growth, which has been beneficial to work safety and maintaining robust and stable materials storage.
- ESD budgeted an estimated $1 million to equip their shops with newer technology, tools, and equipment.
- ESD plans to add a 15,000-20,000 ft2 warehouse. They would need an additional 5,000 ft2 if plans included food service storage.
- ESD's four high schools also serve as central kitchen facilities to meet the production needs of the entire district.

Administration

- Most of the discussion with Edmonds centered around their newer Operations facilities.
- The current Administration building is about 57,000 SF and was built in 1991 with capacity for 250 staff.
- 5 minute drive from new Ops site and 15 minutes from the warehouse.
- Workspaces are assigned 1:1 even though a hybrid schedule is allowed (1-1.5 days/week remote)
- Supervisors, Assistant Supervisors and Directors get private offices.
- Workstations are 9x9. Each department has some control over the configuration of their stations.
- Current workstations are older and don't allow for much flexibility or ability to respond to different work styles.
- The current building meets most of ESD's needs, however, more small meeting rooms for virtual calls would be helpful.
- Challenges:
  - The building is completely open and sound transfer is an issue between departments/ floors. ESD would prefer departments be separated for better privacy.
  - Insufficient parking – when the public comes people often need to park off-site
- It was determined that a tour of the Admin Building would not be very informative, so only the Ops sites were visited.

THIS PAGE INTENTIONALLY LEFT BLANK

FACILITY INTERVIEW - SAN FRANCISCO

SAN FRANCISCO UNIFIED SCHOOL DISTRICT

San Francisco Unified School District (SFUSD) was selected based on its similar size and urban context to PPS. SFUSD has 49,000 students across 132 schools. They have 11 sites that contain their administrative and M&O functions: two main administrative offices, eight ancillary administrative buildings, and a maintenance building co-located with their central warehouse. The team interviewed Karen Sullivan, the Executive Director of Capital Planning.

Siting and Adjacency

- SFUSD feels that, due to the ease and availability of virtual conferencing, having separate Administrative and M&O sites does not hinder communication and operation. The cultural divide between departments is more of a barrier than location.
- All SFUSD facilities are close to transit, reducing parking needs.
- SFUSD's two major admin sites are within walking distance of each other which is beneficial to workflow. Both buildings are also in close proximity to City Hall which is helpful since they are a strong partner.

Maintenance and Operations

- If it passes, their next bond will support much needed renovations and the addition of a central kitchen to the district's warehouse. This will cause a shift in their model from outsourced/ straight-to-school delivery to preparing their own food.
- Most supplies are delivered direct to schools, saving space in their warehouse.
- The district takes a mixed approach to addressing maintenance – assessing costs to repair, reviewing the frequency of repairs needed, and then weighing against the cost of replacing with new systems.
- SFUSD has an internal furniture exchange system that allows schools to list unused furniture for other schools to claim prior to surplus.

Administration

- Administrative Staff are primarily in 2 buildings in downtown San Francisco. (Staff counts for each were not shared)
  - 135 Van Ness – built 1926, 116,087 sf
    - Real Estate, Bond, Construction, Facilities, Payroll, Budget etc.
  - 555 Franklin – built 1965, 69,767 sf
    - Superintendent, Legal, Communications, Academic/Instruction (Classified Staff), Enrollment, Board Room etc.
    - This site receives most of the public and student/family visits and interactions.
- There are no published space standards. They are currently at capacity for Admin space at the 2 main buildings. Their methods have been:
  - Shrink workstations as needed to accommodate departments.
  - Move groups who can function independently out of the main administration buildings into ancillary buildings, e.g. Early Education, Curriculum and Nutrition Services.
  - SFUSD would like to enact more intentional space planning by utilizing space standards instead of reacting to running out of space.
- Most staff are in the office 5 days a week. If staff can do your job virtually, you can request 1-2 remote workdays per week, however, this is not the norm.
- Both main admin buildings have adequate medium and large conference space. Additional small conf spaces/phone rooms for 1-2 people would be beneficial for virtual meetings.

THIS PAGE INTENTIONALLY LEFT BLANK

FACILITY INTERVIEW - SACRAMENTO

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

Sacramento City Unified School District (SCUSD) was chosen because of its similar size and urban context to PPS. SCUSD has 41,000 students across 75 schools. They have three sites that support their administrative and M&O functions: an administrative headquarters, a maintenance and custodial site, and a new central kitchen facility (2022) co-located with their warehouse and transportation center. The team interviewed Chris Ralston, the Assistant Superintendent of Facility Support Services.

Siting and Adjacency

- SCUSD prefers a clear delineation between administration and M&O departments, noting improved operational efficiency due to limiting administrator influence on crew priorities and workflow.
- SCUSD's maintenance facility is not centrally sited, however its proximity to major highways allows better access to schools than a central location.
- The Serna Center, SCUSD's Administration Building, is centrally located but is not near major freeways so commute times to schools can be longer. It has ample parking and access to transit, which is beneficial.

Maintenance and Operations

- The Central Kitchen facility is 30-40,000 ft2 and has a capacity to produce over 40,000 meals daily, ready to deliver to schools the following day.
- The district typically replaces old infrastructure with new to comply with California laws. Maintenance only stocks a few commonly used items or those that are more conveniently ordered in bulk, allowing their staff to purchase supplies at stores as needed to reduce storage space.
- The district uses schools that have been closed for additional storage, however they are systematically removing this storage and surplusing these properties. They have minimal storage at open schools.

Administration

- Administrative Staff are primarily located at the Serna Center.
  - 20 year old facility
  - Approx. 155,000 sf, 500 staff
- SCUSD is trying to reset space standards that have deteriorated over time by reconfiguring quadrants of workstations at the Serna center. Workstations are 48 sf, 64 sf and 92 sf based on role, however, that needs further evaluation.
- Director positions and above receive standard offices, approx. 120-150 sf.. Superintendent, Deputy Superintendent and CEO positions receive larger offices with internal meeting space.
- All staff are in 5 days a week. There is no remote or hybrid work.
- The Serna center was designed with ample conference space that can be reserved for in-person and virtual meetings.
- There are some large conference rooms at Serna that can be used for professional development and some spaces at middle schools, but Facilities is always being asked to build a Professional Development Center.

THIS PAGE INTENTIONALLY LEFT BLANK

FACILITY INTERVIEW - SALEM-KEIZER

SALEM-KEIZER PUBLIC SCHOOLS

Salem-Keizer Public Schools (SKPS) was chosen because of its similar size to PPS. SKPS has 39,000 students across 65 schools. Their district administrative and M&O functions are contained in eight sites across the city: three administrative facilities; two transportation centers; and one facility each for technology services, maintenance and warehousing, and food and nutrition. The team interviewed their Coordinator of Operations and Logistics and two Business Solutions Analysts from their Bond department.

Siting and Adjacency

- SKPS has done the best they can to maximize investments and efficiencies but would prefer to co-locate more of their functions since balancing the adjacency needs of separated departments has been a logistical challenge for them.
- Purchasing and Procurement and Real Estate/ Property Services are the two administrative departments co-located with the maintenance and warehouse facility.

Maintenance and Operations

- SKPS has a dedicated wood shop; other shop space is co-mingled in a bay system.
- Maintenance staff often save and repurpose parts, requiring a significant amount of shop space dedicated to storage.
- While their maintenance space is adequate, they would prefer to double their current parking footprint to accommodate more fleet.
- Their warehouse stocks three months of supplies to accommodate for surges and changing needs. SKPS continually monitors their inventory and consumption to better anticipate needs.
- Furniture surplus is dispersed across the district but will be centralized in 5,000-6,000 ft2 of racked storage at their M&O facility once renovations are complete.
- SKPS also maintains an internal store (Central Stores) at their warehouse that serves other Oregon school districts, public agencies, and community non-profits. These organizations can purchase various office, classroom, first aid, custodial and other supplies through a cooperative agreement and SKPS delivers the supplies.
- Curriculum is primarily stored at schools; 500 ft2 of warehouse space is reserved for curriculum.
- Food and Nutrition Services acts as a central distribution site for food that is delivered to schools during the night and early morning and then prepared at the schools.

Administration

- Currently administrative staff are spread out across sites, but area grouped on similar departments to promote workflow and efficiency.
  - Lancaster Professional Center (LPC) 35,000 sf, approx. 115 staff –
    - Superintendent's Office and key administrative departments
  - Student & Family Services (SFS) 48,000 sf, approx. 230 staff –
    - Hub for departments focused on providing essential services to students and families like McKinney-Vento, SPED and Language services
    - This is leased space but owned facilities are preferred.
  - Portland Road Professional Center (PPC) 9,644 sf –
    - Curriculum/Instruction, Nursing and Library/Media
- Microsoft Teams software has been invaluable for remote communication for departments and staff at different locations.

- SKPS noted space standards are highly affected by what space is available and constrained by budget issues. As they move forward with new furniture, standards are being implemented.
- Due to the shift to virtual meetings, staff would prefer taller panels to help with distractions.
- Headsets have been issued to help with noise issues, and conference rooms are reservable for virtual meetings. No special “zoom” rooms are provided for this purpose.
- Administrators, directors, coordinators and managers all typically have offices.
- Most staff are in 5 days a week, workspaces are assigned 1:1.
- SKPS often outsources space when needed for large meetings or professional development, due to a deficiency in spaces large enough to accommodate these functions.

FOCUS GROUP DISCUSSION

Summary

A focus group was held with department leaders on November 25, 2024, to review peer district findings and discuss their potential relevance to PPS. Major themes from that discussion are listed below.

- **Co-location is important**. Co-location is important to PPS culture and efficiency and there will be impacts to separating some functions currently co-located at the Prophet Center; specifics to be discussed in the next project phase. Though not currently at the Prophet Center, co-locating district-wide administrative departments as well as transportation with maintenance and operations could significantly reduce unproductive travel time and should be explored further in this project.
- Property criteria priorities include a **central location**, adequate **staff parking**, and **safety and security** for the site and building.
- If in multiple locations, facilities should ideally be no more than **10 minutes driving distance apart**, although this will be impacted by a variety of factors including time of day.
- **There are a range of opinions about parking**. Some focus group attendees believe that providing parking for employees is important to recruitment and retention. Others hope to reduce free parking to influence behavior and progress toward climate justice goals. Parking can be a hiring incentive and is essential for departments that **require staff to have personal vehicles**.
- **Human Resources (HR) support is desired**. Many departments would prefer to have on-site HR representation to facilitate the hiring process and support staff.
- **Public access** is most critical for education-based departments.
- An appropriately designed and outfitted **emergency operations center (EOC)** is a priority, with secondary facilities at each site.

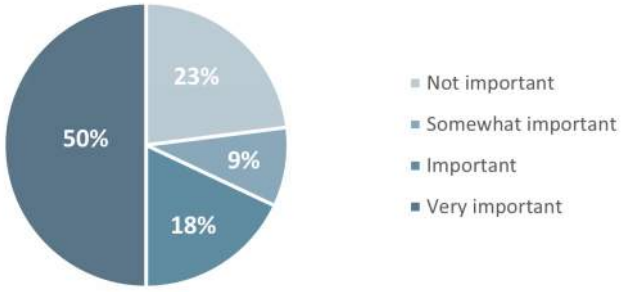
Focus group attendees highlighted this project's opportunity to help contribute to the mission of the Albina Vision Trust. Attendees are looking forward to the potential of reviewing team space, reducing windshield time, and forming right-size facilities and infrastructure. They hope this effort will result in spaces that encourage collaboration, streamline processes, and are safe and welcoming to staff and the community.

Polling Results on Key Issues

Focus group attendees were polled anonymously around six key questions, which helped facilitate discussion around polling results. Polling outcomes and discussion highlights are shown below.


How important is it to PPS culture to be co-located?

- 68% of PPS focus group attendees feel it is important or very important to PPS culture to co-locate all departments.
- Some attendees noted an interest in learning more about other departments' operations as part of this assessment and relocation and anticipate new opportunities to collaborate.



How important is it to PPS efficiency to be co-located?

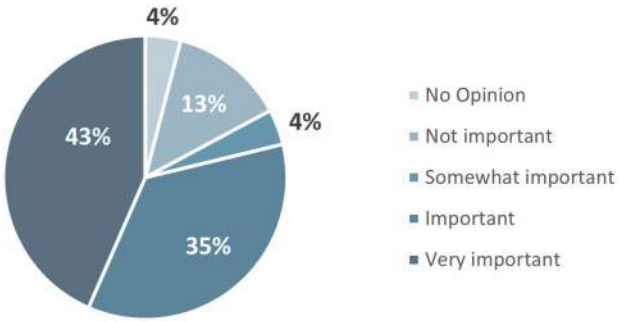
- 78% of PPS focus group attendees feel it is important or very important for efficiency to co-locate all PPS departments.
- Proximity to security services and HR is important for providing a streamlined M&O application and hiring process. Co-location allows HR to easily conduct in-person interviews and security services to provide badges for new hires.
- Staff at the off-site transportation facility sometimes perform HR-related job functions to support the staff's need for in-person communication.
- Transportation would prefer to be co-located with other M&O departments that would benefit from proximity to vehicle maintenance, namely nutrition services.
- There are administrative staff at satellite sites that would benefit from co-location with the rest of PPS staff in a new facility.
- Co-located departments make it easier for new school staff, especially principals, to navigate district services.



FOCUS GROUP DISCUSSION CONT.


What should be the maximum travel time between sites if in multiple locations?

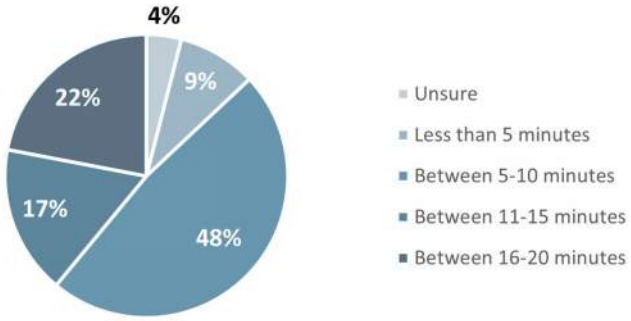- 48% of focus group attendees feel that 5-10 minutes of travel time between sites is ideal.
- One attendee noted that a lack of parking results in staff needing to locate off-site parking, further impacting travel time.




Assuming convenient transit access, what percentage of staff would IDEALLY have a dedicated parking space?

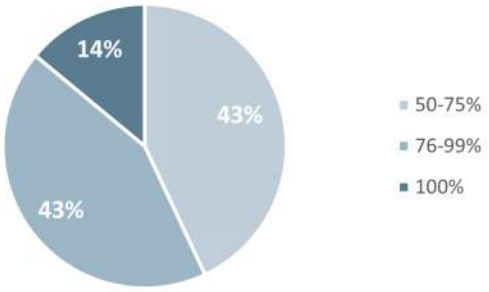- 43% of PPS focus group attendees believe that between 50-75% of staff should have dedicated parking spaces at a new headquarters facility, with 43% believing between 76-99% of staff will need dedicated parking spaces.
- Attendees suggested providing shared parking similar to the current arrangement between PPS and the Moda Center.
- Transit is too limited for staff to efficiently commute from the PEC to various schools each day.
- Paid parking is not feasible for all staff. Some staff use their personal vehicles for work, which requires an on-site parking spot.
- Safety is a concern for off-site parking.



What is the most important site or property criteria? (Participants chose up to two)

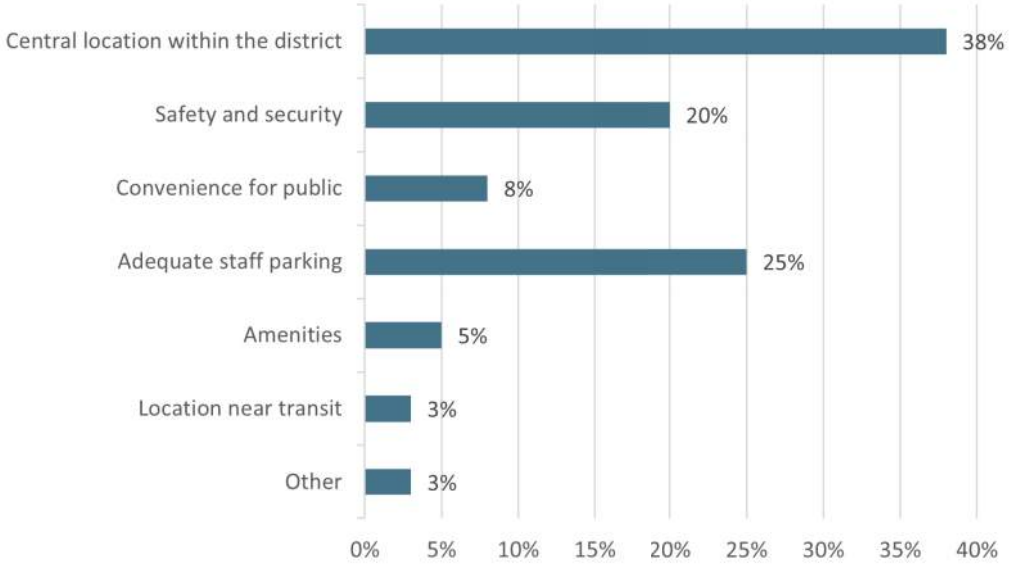- PPS focus group attendees prioritized a central location within the district (38%), adequate staff parking (25%), and safety and security (20%) as their most important site or property criteria.
- Transportation noted an estimate of 4,000 additional miles a week in windshield time because of their location at the edge of the district.
- Proximity to transit is a priority for visiting families.
- Attendees stated the importance of a new facility being designed to make families feel welcome and served by PPS.



THIS PAGE INTENTIONALLY LEFT BLANK

PHASE I B - VISIONING

Refinement of the PEC Space and Programming Report Recommendations Summary



THIS PAGE INTENTIONALLY LEFT BLANK

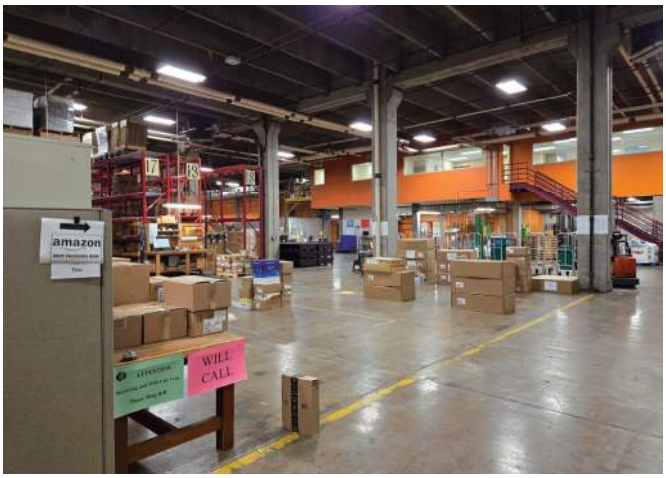
DEPARTMENT INTERVIEW SUMMARY

In order to prepare the PEC Space and Programming Evaluation Report, Bainbridge and Mackenzie conducted interviews with each Portland Public School department. Each department received a standard set of questions, as well as department specific questions to address distinct needs that each department may have. We challenged each department to think of efficiencies that could be achieved if they were located in a new modern facility. Each department also received information on the peer district findings compiled in Phase 1A as a comparison of where their department stood in comparison to their peers.

Upon completion of the department interviews, the warehouse storage facility was toured by each department with the consultants to understand, the current rotation of inventory, the management of inventory, the lay down space required, receiving and shipping requirements, what are items that are no longer required by PPS that can be either donated or purged, and utilization of the loading docks.







INTERVIEW SUMMARY CONT.

Programming Phase included the following:

- Conducted 20 interviews with Chief's and/or department representatives
- Site verified all existing office space, documented current storage and identified other misc. needs
- Discussed operational effects with each department if future facility is split into two separate sites (Admin/Ops)
- Created programming sheet for each Chief/ Department identifying staff counts, types of workspaces and required support spaces. Each space was assigned a standardized square footage

Administrative office specific findings:

- Current workstations and private offices are sized based on existing physical conditions and vary throughout the building. Departments and their staff have been fit into their areas based on these existing conditions, available systems furniture sizes and are typically arranged as efficiently as possible. In order to understand space needs and create consistency, standardized sizes for workspaces and support spaces were assigned across all departments. Thisadds efficiency and flexibiity as departments shift and change. The following sizes were implemented:
  - 35 SF (6'-0" x 6'-0") – standard workstation
  - 25 SF (5'-0" x 5'-0") – hotel workstation
  - 120 SF – Standard office for Directors
  - 220 SF – Standard office for Chiefs (includes meeting space for 4-6 people)
  - 320 SF – Standard office for Superintendent (includes meeting space for 6+ people)
- It was determined that the existing Board Room and adjacent flex space are typically used in conjunction to provide enough space for large gatherings and meetings. These two spaces were added together for the future Board Room minimum square footage.
- Conference space for groups of sizes 20-25 were identified as a need by 6 departments. Two rooms of this size were added to the administrative support spaces
- Large event and professional development spaces with room to accommodate 50+ people were identified as a need by at least 3 departments. It was noted that when these spaces are needed groups have to go to a different facility or must rent space which has cost and efficiency implications.
- Most groups agreed that small, enclosed phone rooms would be necessary for a successful open office workspace. Virtual calls are noted as loud and disruptive in an open work environment and are a common occurrence for staff in all departments.
- Many departments had dedicated coffee/break areas and copy/work areas. Almost all groups stated they could easily share these functions for a more efficient use of support space.
- Other Assumptions used in program and criteria development:
  - A seat is assumed for every staff member currently assigned to PEC, a hybrid work model was not considered.
  - No future staff growth is included.
  - Square footage requirements for off-site staff/ functions are not included.
  - Conference rooms are listed as either shared or dedicated based on department programming meetings. These may fluctuate but provide design flexibility for PPS.
  - A lunchroom/cafeteria with cooking capabilities was not included. Breakroom space appropriate for the overall staff count was listed as a lump sum to be distributed depending on the scenario and built conditions.
  - No changes to current PPS operations were assumed

Shop Specific Findings:

- In comparison to other peer districts, the shop facilities are generous in size. Fabrication and Shop; Maintenance – acknowledged that they can reduce their overall shop and fabrication areas by 30% which would be comparable to peer districts.
- Reduction in space would be accomplished by eliminating underutilized equipment, shared equipment within different shop divisions, and eliminating and categorizing inventory.
- Similar to the warehouse inventory, there is no district wide inventory of parts and pieces etc. With SKU and or bar codes, therefore it is difficult to understand at any given point what materials and pieces are within the shop. This can potentially cause redundancy and inefficiency in ordering parts etc.

At the culmination of the interviews, Bainbridge and Mackenzie facilitated an overview discussion with the Core Team to review information collected prior to advancing to program documentation.



Electrical Shop



Music Shop

- In line with current Industry Standards, the new facility takes into consideration new safety features. Dedicated pedestrian vs. equipment paths be clearly delineated and provided within the warehouse circulation space. (Photos from Examples of Safety)
- PPS currently does not have a district wide inventory system, therefore each department must keep a good line of communication with the warehouse facility management team so that inventory is understood and can be managed.



Examples of Safety

INTERVIEW SUMMARY CONT.

Warehouse specific findings:

- The existing racking system was designed to meet the codes in place at the time of installation. It does not accommodate standard pallet sizes and is therefore no being utilized to its fullest capacity. Updated seismic standards will apply when permitted in a new location and new racking should accommodate standard pallet to maximize storage efficiency.
- For the new operations facility, in order to be in compliance with new regulations and code, the following are recommended to be part of the minimum criteria:
  - A minimum of 6" thick concrete slab for seismic code requirements.
  - A ESFR (in-rack fire suppression system) sprinkler system that would eliminate the need for and in-rack sprinkler allowing for more opportunity to store within the raking system.
  - Replace all existing racking systems with new racking systems that allow for more efficient weight distribution, added safety features, standardized pallet sizing, and meets current high seismic zone requirements.
- PPS currently has 6,072 pallet positions with varied pallet heights based on the existing beam levels. When defining space needs in a warehouse, the standard representation is in volume in lieu of square footage. They currently have 263,578 cubic feet of storage space for racking. Assuming that PPS will not be removing any programs or elements for their new facility, PPS would need at least 263,578 cubic feet of racking storage to be able accommodate what they are currently storing.
  - Approximately 40% of inventory is managed by Instructional Resource Center (IRC) with textbooks and science kits.
- The majority of their existing beams are 106" and their pallet width is primarily 40". This means each rack can only store two pallets per beam level with and extra 26" of available length, creating inefficient unusable space. The consultant team would recommended the new racking system use 96" beams which is standard for two pallets that are 40" x 48". For each row that has 11 or more bays this change to 96" beams could gain an additional bay in each row, or gain approximately 51 bays throughout their whole warehouse.
- The vast majority of PPS's warehouse is laid out in what industry standards call VNA (very narrow aisle), using aisles down their rows that are 6 ft wide. In a VNA application the most common forklifts used are order pickers and swing reaches. PPS has both order pickers and swing reaches at their current location. Their order picker has an elevated height of 210 inches. Meaning this unit could reach beams levels a little under 18 feet, therefor if in the new facility the clear height is higher than PEC, a new order picker will be required to reach new heights.
- PPS's other big limitation in their existing warehouse is their overall storage height. The majority of the current racking is 14' high. It is recommended that the new warehouse has a clear height of 30'. This would allow PPS to store between 20-26 ft.
- If PPS were to find a warehouse that can accommodate these heights, they would need to potentially purchase new equipment that would allow them to store product at higher elevations. Those who are currently trained and certified to operate the lifts will not need to be trained again to be able to use similar equipment that goes higher. The more product that PPS is able to store at a great height the more space they can save on their overall footprint.
- PPS currently stores any items in the warehouse that are small parts, such as the science kits, laptops, etc. Raymond West recommends that a system like a Kardex Vertical Lift Module be considered in the new facility to optimize storage space and decrease the overall footprint within the warehouse. This provides a high -density storage solution, efficiency utilizing the overall footprint, with greater improvement to the picking speeds , as well as a safe and secure place to store valuable items such as laptops.

PEC EXISTING WAREHOUSE FLOOR PLAN



THIS PAGE INTENTIONALLY LEFT BLANK

PEC SPACE AND PROGRAMMING REPORT RECOMMENDATIONS DEVELOPMENT SUMMARY

Bainbridge and Mackenzie worked closely with Portland Public Schools to review and validate the program using space standards to organize the rooms and provide adequate square footages typically required by School District Headquarters – Administration and Operations facilities of this size.

Space needs assessment and programming is a critical process in any project. Understanding existing conditions, operational needs, constraints, and future growth forecasts play a key role in influencing space needs and planning projections. Space needs programming represents a collection of physical needs for the public, staff, shared functions and facility support functions of the building and exterior requirements. The culmination of the physical space needs assessment provides a recipe for total square footage requirements of the building and site for identified current projections. Accurately identifying and rightsizing building and site needs, is essential in understanding full project square footage needs and identification of potential existing building relocation or sites for development.

Based on the programming workshop, Bainbridge and Mackenzie developed the following programming document to capture information from initial staff interviews. The programming document encompasses staffing and program needs for immediate occupancy. Per Portland Public School request, the programming does not consider any future growth or change in operations. The space allocations include space sizes, quantities, and unique requirements specific to individual needs are found in Appendix A.

- Created a programming sheet for all shared and amenity spaces not dedicated to a specific department (i.e. Board Room, Professional Development/Event spaces, Mother's Rooms, etc .)
- Assessed current conference room and break room sizes and quantities against desired amounts identified during programming interviews
- Identified satellite and hoteling spaces required by departments if split into two sites
- Separated departments based on site preference (Admin./Ops) to create Scheme 3

PEC SPACE AND PROGRAMMING REPORT RECOMMENDATIONS DEVELOPMENT SUMMARY

The three schemes that were evaluated are the following:

Scheme 1 – A combined administration and operations facility, like the PEC with improved efficiencies.

Scheme 2 – Two separate facilities, one for Administration and one for Operations. The operations facility will be primarily – shops, warehouse space, and nutritional services, and excludes administrative staff that have preference of being located at the operations facility.

Scheme 3 – Two separate facilities, one for Administration and one for Operations with each department located at their preferred facility. The following is a breakdown of departments at each facility:

- Administration Facility
  - Superintendent
  - Chief of Staff
  - Chief Financial Officer
  - General Counsel
  - Chief of Human Resources
  - Chief Accountability and Equity Officer
  - Chief Academic Officer
  - Chief of Student Success Services
  - Chief of Schools

- Operations Facility
  - Fabrication & Shop; Maintenance (COO)
  - Nutritional Service (COO)
  - Warehouse (COO)
  - Chief Operating Officer (COO)
    - Office of School Modernization (OSM)
    - Security Services
    - Real Estate & Construction (REC)
  - Office of Technology Information Services (OTIS)

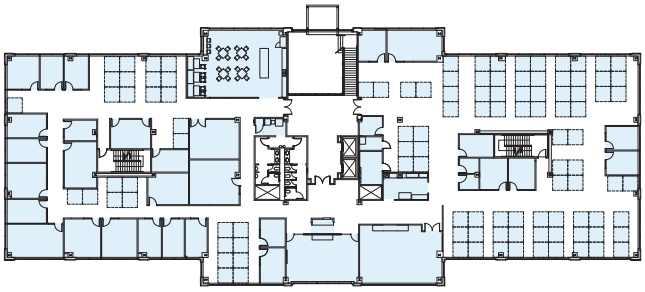
Beyond the specific individual space needs, a circulation factor exists to represent space needs for common hallway circulation, corridors, building mechanical shafts and walls that cannot be categorized as functional program but contribute to the overall required building space needs.

- **Net Area or NSF** (net square feet); references only the actual room square footage.
- **Usable Area or USF** (usable square feet); accounts for interior walls and building circulation.
- **Gross Area or GSF** (gross square feet); for built structures includes exterior walls, vertical penetrations, mechanical, restrooms, code required spaces, and other support spaces; for surface parking includes stall sizes; and for yard storage includes site area.

(see page 03-11 for diagram)


- An industry standard circulation multiplier of 1.55 was added to the net square footage (NSF) for all admin spaces to calculate usable square footage (USF). This is typical when the building program is predominantly workstations. However, it does not allow any contingency to compensate for inefficiencies in a building floor plate.
- A building gross multiplier of 1.2 was added to the usable square footage (USF) to account for exterior walls, vertical penetrations/circulation, building systems and restrooms to calculate gross square footage (GSF).
- An industry standard circulation multiplier for Operations facility of 1.15 was added to the net square footage (NSF) for all operations spaces to calculate usable square footage (USF). This is typical for a fabrication / warehouse facility, However, it does not allow any contingency to compensate for inefficiencies in a building floor plate.
- An operations building gross multip;ier of 1.15 was aded to the usable square footage (USF) to account for exterior walls, vertical penetrations / circulation, building systems and restrooms to calcuate gross square footage (GSF).

TYPES OF SQUARE FOOTAGE - DIAGRAM




Net Square Feet - NSF

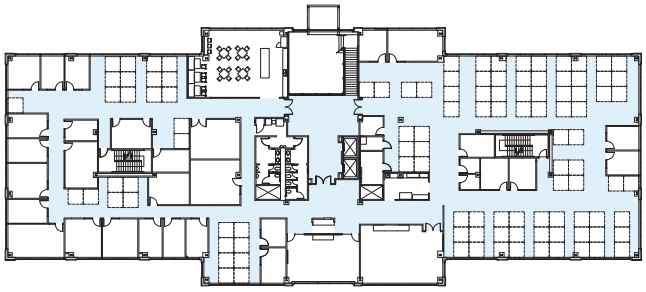The area of each proggramed space.
(workstations, private offices, conference rooms, ect.)




Circulation Area

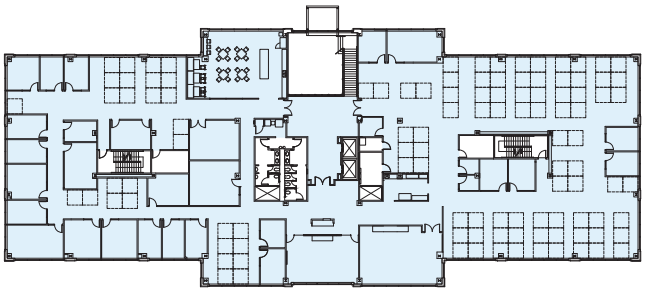All circulation throughout the floor plan to access primary and secondary spaces. Excludes elevators and exit stairs.



Usable Square Feet - USF

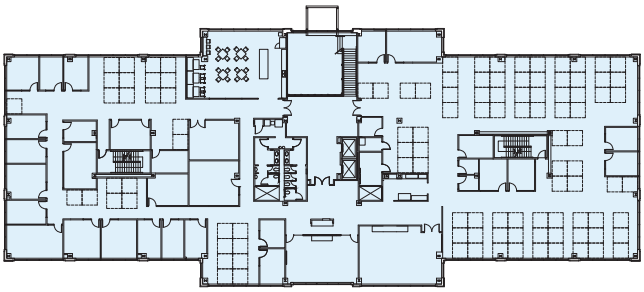Total occupiable area.



Gross Square Feet - GSF

Total floor area to the exterior face of the building. Includes building systems and vertical penetrations.

PROGRAM MATRIX - SCHEME 1

SCHEME 1:			**Grand Total:**	**278,557**
COMBINED FACILITY - ONE FACILITY				
Description: Same program as PEC - All in one facility				
Total FTE: 691			**Existing GSF: 339,636 SF**	
	Net Square Feet (NSF)	**Usable Square Feet (USF)**	**Gross Square Feet (GSF)**	**Total Site Square Feet (TSF)**
Administration	60,970	94,504	113,404	
Operations - Office	7,895	12,237	14,685	
Operations - Warehouse/Storage/Shop	113,776	130,842	150,468	
Site Functions (Trash, generator, etc.)				34,336
Site Parking (inclusive of Drive Aisles, etc.)				307,080
			Fleet Parking:	121
			Employee Parking:	691
			Visitor Parking:	40
			Total Parking Stalls:	**854**
TOTAL ADMIN & OPS COMBINED FACILITY BUILT AREA (in square feet)			**278,557**	
Notes:				
* When relocating to a new facility, the facility will need to meet the current code requirements, which is unavailable in the existing facility due to the age of the building. For example: plumbing count, clearances around equipment, egress, wellness room, etc.				

PROGRAM MATRIX - SCHEME 2

SCHEME 2:			**Grand Total:**	**281,665**
ADMINISTRATION FACILITY w/ OPS STAFF				
Description: All administrative offices/workstations at Admin				
Total FTE: 577			**Existing GSF: 115,218 SF**	
	Net Square Feet (NSF)	**Usable Square Feet (USF)**	**Gross Square Feet (GSF)**	**Total Site Square Feet (TSF)**
Administration	60,970	94,504	113,404	
Hoteling Station	75	116	140	
Site Functions (Trash, generator, etc.)				1,940
Site Parking (inclusive of Drive Aisles, etc.)				218,520
			Fleet Parking:	29
			Employee Parking:	577
			Visitor Parking:	20
			Total Parking Stalls:	**628**
TOTAL ADMIN WITH OPS STAFF FACILITY BUILT AREA (in square feet)			**113,544**	
OPERATIONS FACILITY wo/ OPS STAFF				
Description: Departments with only direct physical and personnel relationship with Operations/Warehouse				
Total FTE: 114			**Existing GSF: 224,418 SF**	
	Net Square Feet (NSF)	**Usable Square Feet (USF)**	**Gross Square Feet (GSF)**	**Total Site Square Feet (TSF)**
Operations - Office	7,895	12,237	14,685	
Operations - Warehouse/Storage/Shop	113,776	130,842	150,468	
Hoteling Station	1,596	2,474	2,969	
Site Functions (Trash, generator, etc.)				32,396
Site Parking (inclusive of Drive Aisles, etc.)				81,360
			Fleet Parking:	92
			Employee Parking:	114
			Visitor Parking:	20
			Total Parking Stalls:	**226**
TOTAL OPS WITHOUT OPS STAFF BUILT AREA (in square feet)			**168,121**	

Notes:

* When relocating to a new facility, the facility will need to meet the current code requirements, which is unavailable in the existing facility due to the age of the building. For example: plumbing count, clearances around equipment, egress, wellness room, etc.

** Two separate facilities will mean a twice the many vertical circulation, building systems - mechanical shafts, plumbing chaise etc.

PROGRAM MATRIX - SCHEME 3

SCHEME 3:			**Grand Total:**	**281,764**
ADMINISTRATION FACILITY wo/ OPS STAFF				
Description: Departments at their preferred location				
Total FTE: 419			**Existing GSF: 89,106 SF**	
	Net Square Feet (NSF)	**Usable Square Feet (USF)**	**Gross Square Feet (GSF)**	**Total Site Square Feet (TSF)**
Administration	48,141	74,619	89,542	
Hoteling Station	982	1,522	1,827	
Site Functions (Trash, generator, etc.)				1,940
Site Parking (inclusive of Drive Aisles, etc.)				160,560
			Fleet Parking:	7
			Employee Parking:	419
			Visitor Parking:	20
			Total Parking Stalls:	**477**
TOTAL ADMIN WITHOUT OPS STAFF BUILT AREA (in square feet)			**91,369**	
OPERATIONS FACILITY w/ OPS Staff				
Description: Departments at their preferred location				
Total FTE: 272			**Existing GSF: 250,530 SF**	
	Net Square Feet (NSF)	**Usable Square Feet (USF)**	**Gross Square Feet (GSF)**	**Total Site Square Feet (TSF)**
Operations - Office	20,777	32,204	38,645	
Operations - Warehouse/Storage/Shop	113,776	130,842	150,468	
Hoteling Station	689	1,068	1,282	
Site Functions (Trash, generator, etc.)				32,396
Site Parking (inclusive of Drive Aisles, etc.)				139,320
			Fleet Parking:	114
			Employee Parking:	272
			Visitor Parking:	20
			Total Parking Stalls:	**406**
TOTAL OPS WITH OPS STAFF BUILT AREA (in square feet)			**190,395**	

Notes:

* When relocating to a new facility, the facility will need to meet the current code requirements, which is unavailable in the existing facility due to the age of the building. For example: plumbing count, clearances around equipment, egress, wellness room, etc.

** Two separate facilities will mean a twice the many vertical circulation, building systems - mechanical shafts, plumbing chaise etc.

THIS PAGE INTENTIONALLY LEFT BLANK

PEC SPACE AND PROGRAMMING REPORT RECOMMENDATIONS DEVELOPMENT SUMMARY

PROPERTY SEARCH RECOMMENDATIONS

When searching for properties, Bainbridge and Mackenzie recommends that PPS utilize a range of square footages for each Scheme. When moving into an existing facility, there may be inefficiencies within the facility, such as, curvatures in walls that create underutilized spaces, inefficient locations of building systems, etc.

The recommended range for each of the three different schemes to aid in a property search analysis are as follows. Please note that the range is rounded to the nearest thousands.

- **SCHEME 1:**
  - Combined Facility - 279,000 SF - 307,000 SF
- **SCHEME 2:**
  - Administration Facility with Operations Staff - 114,000 SF - 125,000 SF
  - Operations Facility without Operations Staff - 168,000 SF - 186,000 SF
- **SCHEME 3:**
  - Administration Facility without Operations Staff - 96,000 SF - 106,000 SF
  - Operation Facility with Operations Staff - 191,000 SF - 210,000 SF

The following minimum criteria should be taken into consideration as PPS searches for facilities:

- Criteria 1: Owned not Leased
  - Context: The District does not have the financial capacity to take on a long-term lease that would increase over time. Ownership also allows greater control over operating expenses.
- Criteria 2: Within District Boundaries
  - Context: The Administrative site must be within District boundaries. However, the Operations Center could be outside the boundaries if it results in a more appropriate site and any increase in average driving time is justifiable.
- Criteria 3: Central Location
  - Context: Given the high volume of travel between the District headquarters and schools, the location(s) should be reasonably central (relative to schools) to allow efficient travel back and forth for both PPS staff and the public.
- Criteria 4: Easy Freeway Access
  - Context: The location(s) needs good access to major freeways and arterials.
- Criteria 5: Access to Public Transit
  - Context: As part of the PPS commitment to Climate Justice, we will continue to encourage use of mass transit.
- Criteria 6: Parking
  - Context: The new location(s) must have a reasonable (warehouse 1:1000 SF and admin 2:1000 SF) number of on-site parking spaces correlated to the functions at the site, including parking for visitors and families who need to access Central Office functions and Board meetings.

- Criteria 7: Accommodates PPS Spatial and Functional Needs
  - Context: The selected relocation options must support PEC's programming as identified through the PEC Space and Programming Evaluation report. Select parameters and assumptions are highlighted below:
  - On-site workspace for every PPS Central Office employee.(March 2025 staff count without increase or reduction; no changes to PPS operations were assumed).
  - Equivalent conference space to PEC (redistributed in quantity, size, and capacity to better align with needs).
  - Break and lunchroom space within industry standards.
  - Private office space in line with sensitive work requirements and District policy.
  - Boardroom space with equivalent seating capacity, dais, and AV capacity as PEC Boardroom
  - Operations space for current functions and inventory storage, including:
    - Fabrication & Shop Maintenance
    - Nutritional Service, including industrial kitchen
    - Warehouse
    - Chief Operating Officer (COO)
    - Office of School Modernization (OSM)
    - Security Services
    - Real Estate and Construction Management (REC)
    - Office of Technology Information Services (OTIS)
    - Loading Docks (at least 10)
    - Fleet Parking (at least 121 spaces)
- Criteria 8: Safety
  - Context: Site safety is critical for staff and visitors, particularly after dark.
- Criteria 9: Cost Neutral to PPS
  - Context: Consistent with Resolution 6861 As Adopted, the entirety of the relocation must be cost neutral to PPS.

Back Cover